



### Pocket Flap

Now you'll need your Pocket Flap pieces (1). Lay one fused piece and one unfused lining piece with the RIGHT SIDES TOGETHER. Stitch around the outer curved edge at 0.5cm. Then turn the flap out the right way and press it nice and flat.



# Pocket Flap


Add 2 rows of topstitching around this curved edge, the first at 0.7cm and the second at 0.1cm from the edge.



### Gusset Pocket


 $\bigcirc$ 


Make sure your notches are snipped as these are important. Place your gusset (2) and pocket bag (3) RIGHT SIDES TOGETHER. Line up the top of the gusset with the top notches on the pocket and pin all the way around. Stitch around at 0.5cm seam allowance.



# Gusset Pocket

Hem the outside edge of the gussest by turning 0.5cm under and stitching down.





### **Gusset Pocket**

Press the stitched gusset seam back on itself to form a french seam. Stitch around again at 0.5cm. The seam will be on the outside/right side of the pocket.

#### **Gusset Pocket**

Next arrange the gusset so it's folded neatly on itself with the hem edge sitting just under the french seam of the pocket.


Overlock the top straight edge and fold down by 2cm and press. Stitch along the top fold at 1mm from the edge catching the pre-folded gusset inside. You should now have what kooks like a finished gusset piece to attach to the body.



# THE MODERN SEWING CO.

(H)

# Potters Jacket

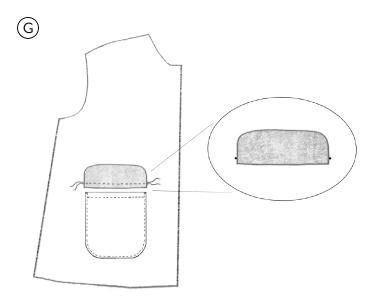


#### **Gusset Pocket**

Mark your prefered gusset pocket positions on your front pieces - we tend to place them roughly 43cm down from the side-neck-point and 7cm in from the edge of the front. Line up the top corners of the pockets with the two points indicating the placement. Then place the pocket flaps 2cm above the top of the pockets. Check the positioning and if you're planning to add a button and button hole then check the pieces overlap nicely. Pin both pieces into place.


To stitch the Pocket Flap down, stitch the under side down first by turning the flap up. Stitch across at 0.5cm and then fold the flap down and stitch again at 0.5cm.

#### **Gusset Pocket**


To stitch the pocket, pin the hemmed gusset edge carefully in a curve. Peel the top of the pocket back and stitch around the hem at 1mm from the edge. You won't get your machine foot into the edges at the top but just get as close as you can. 

#### **Gusset Pocket**


When you've stitched around the bottom of the pocket bag then add bar tacks on the top corners. This will finish the pocket and close the section that you weren't able to sew down. You can now add your button and button hole if you're chosing to do so.

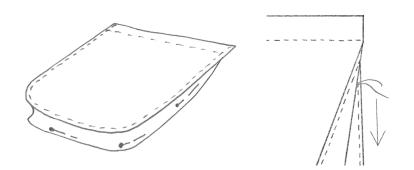





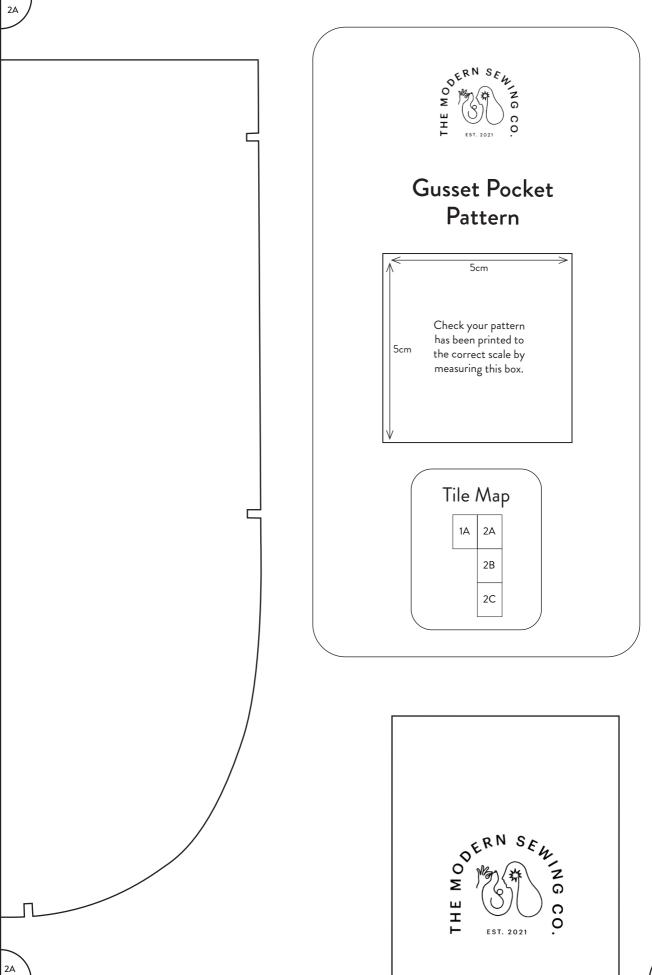

2A

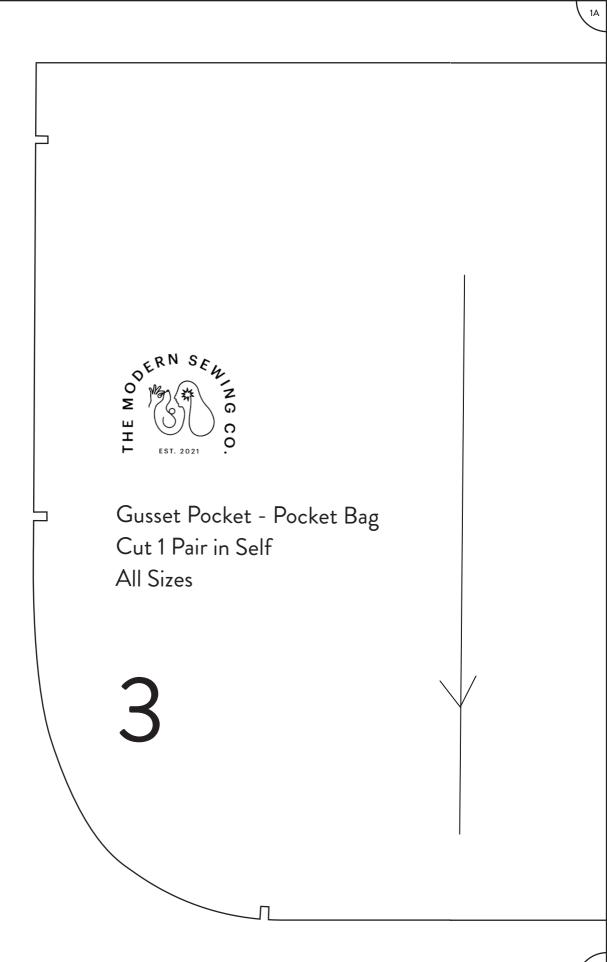

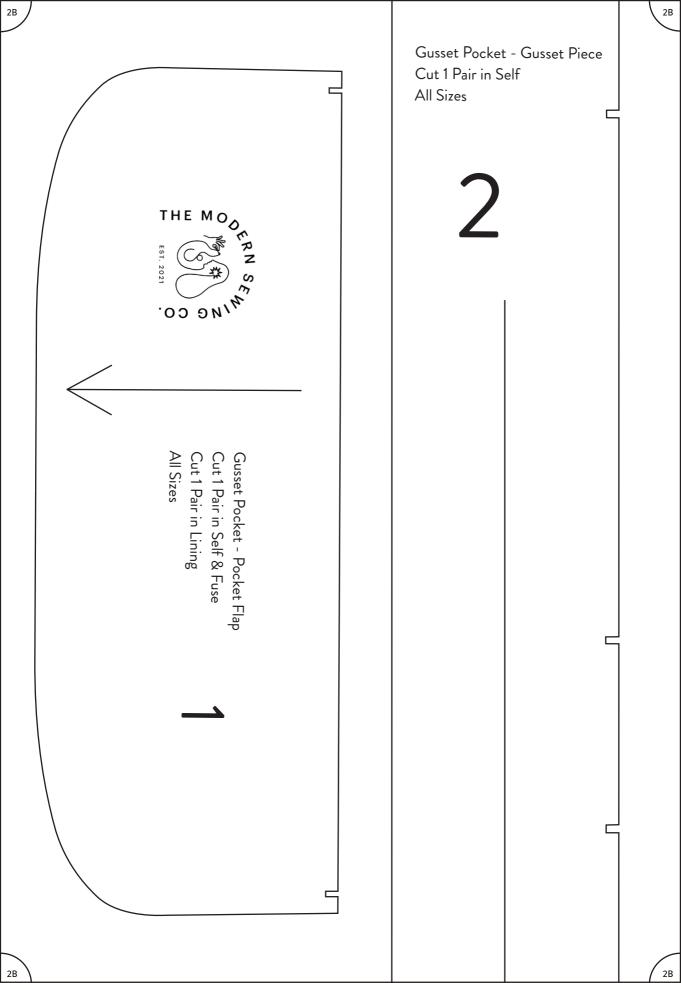

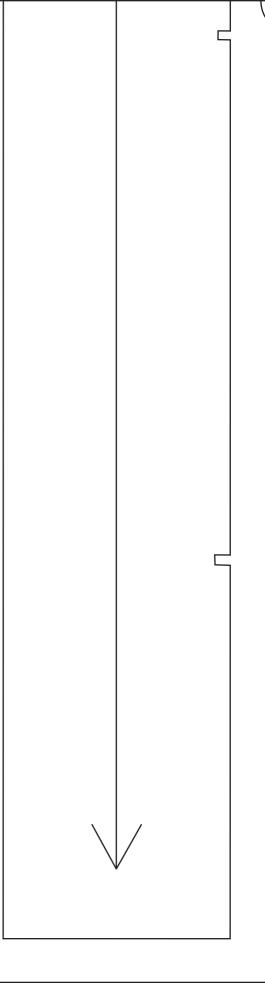

2C

2C