


How to change the SIDE IR Receiver

1. Open the cover base



① Unplug the cord

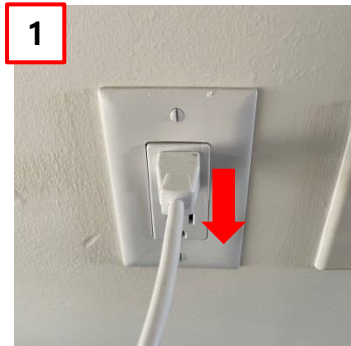


② Close the water valve clockwise



③ Unscrew the 2 screws at the back using a Philips head driver.



④ Detach the cover base by pulling it to the arrow direction as above.

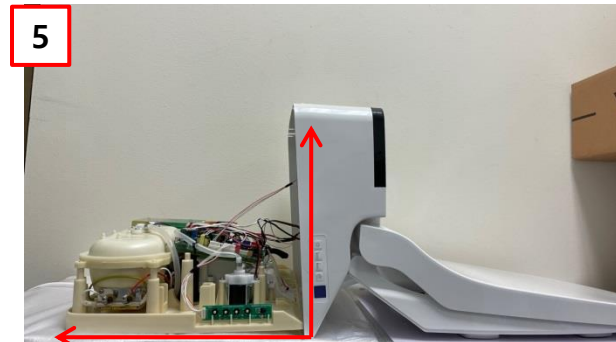


⑤ Make sure that the degree between the ground and the cover base is shown as in the above picture to avoid any wire damage.



[Click for the Video Guide](#)

How to change the SIDE IR Receiver





2-1. Replace the SIDE IR Receiver

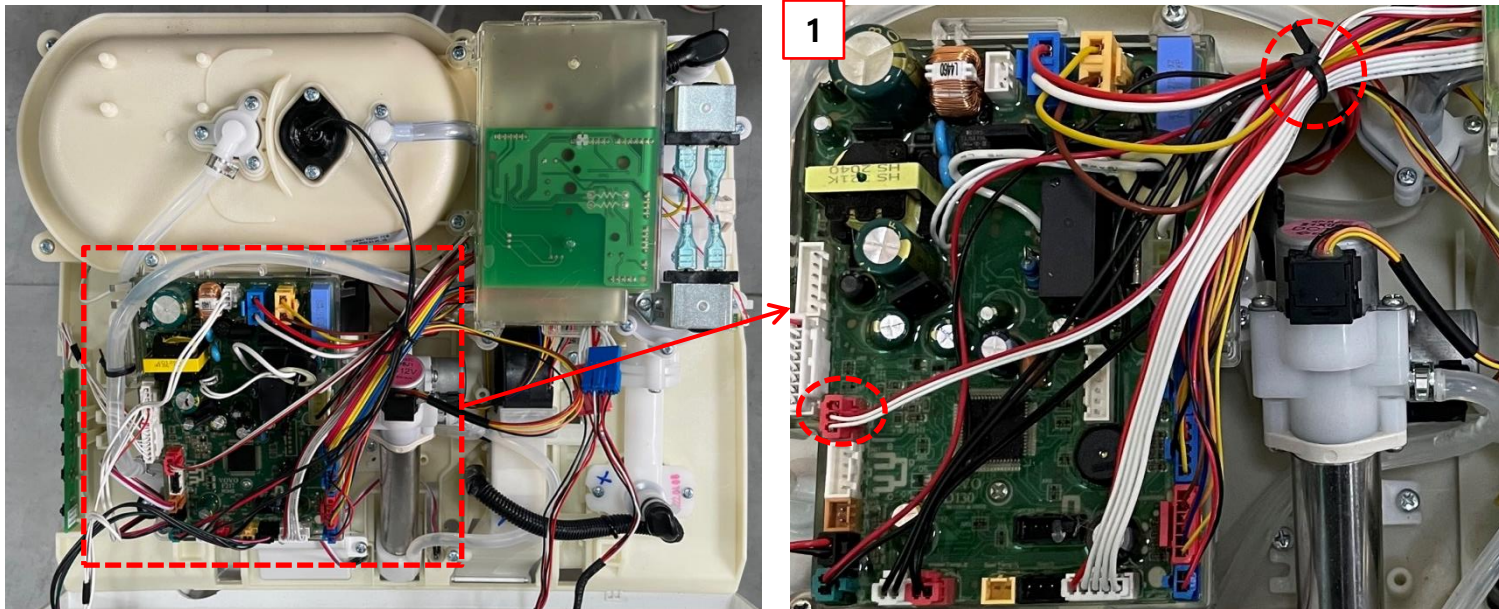

- ① Detach the SIDE IR harness connected with MAIN PCB and remove the black cable tie.

How to change the SIDE IR Receiver


2-2. Replace the SIDE IR Receiver

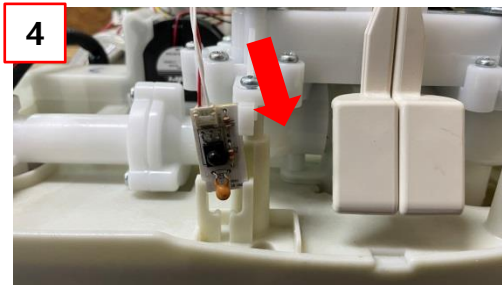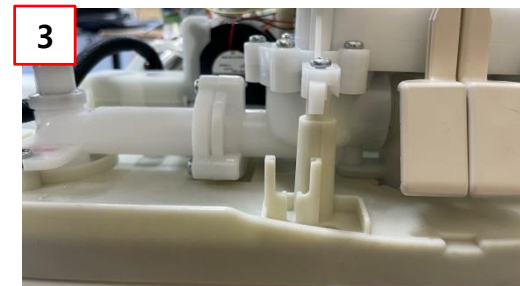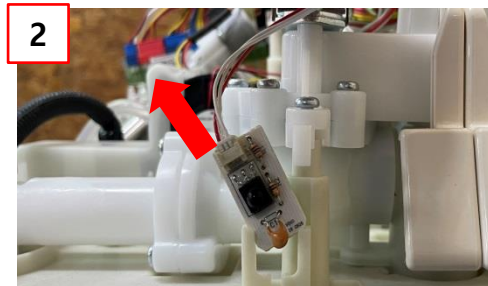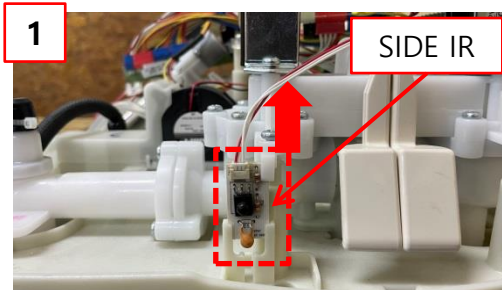

- ① Pull up the SIDE IR in the direction as the photo(UP)
- ② Tilt the SIDE IR in the direction as the photo (Diagonal)
- ③ Detach the SIDE IR
- ④ Attach the new SIDE IR in the direction as the photo

How to change the SIDE IR Receiver


2-3. Replace the SIDE IR Receiver

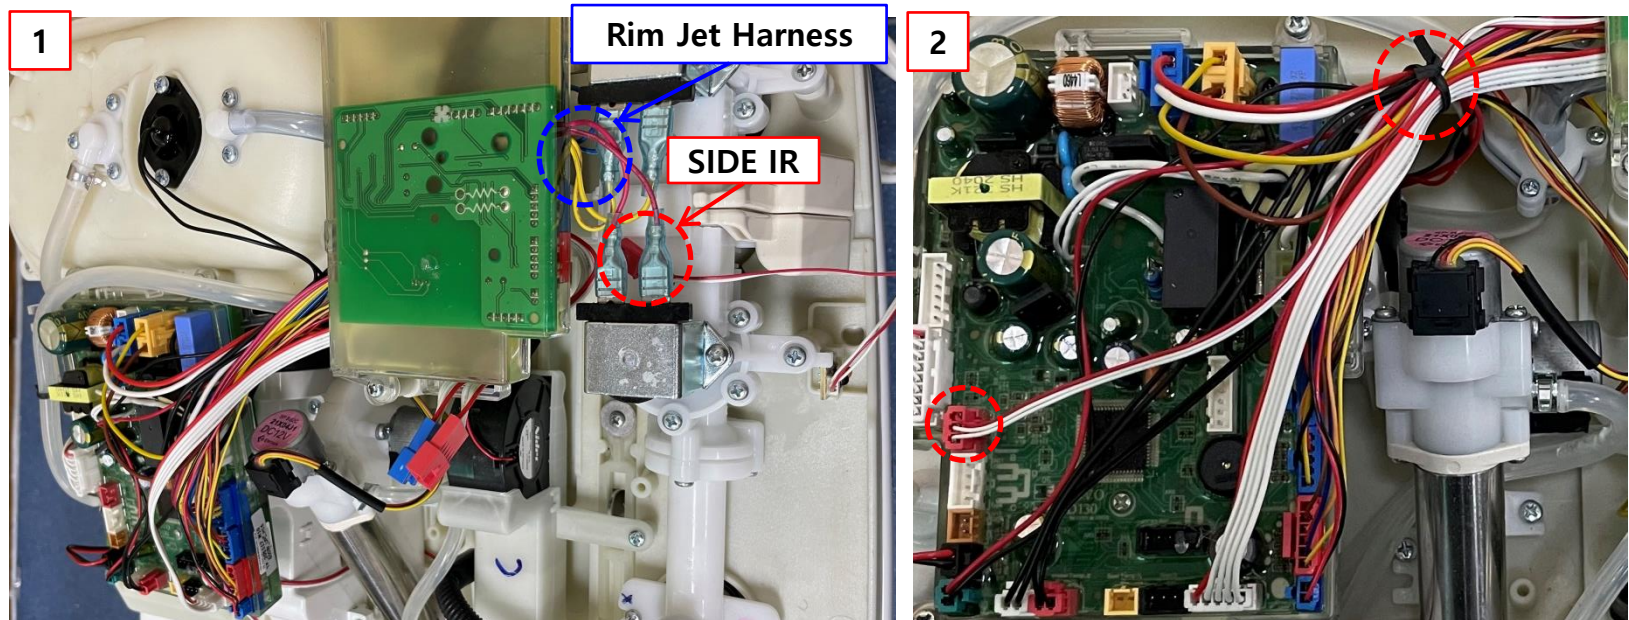

- ① Place the SIDE IR Harness and the Rim Jet Harness as the photo.
- ② Connect the SIDE IR and regroup the wires with the black cable tie.

How to change the SIDE IR Receiver

3. Close the cover base

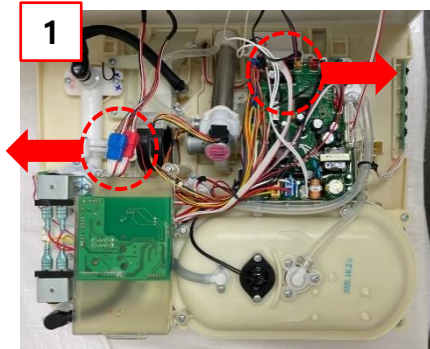


① Organize all the wires in the directions as above not to interfere the nozzle movement.



② Close the cover base in the arrow direction as above.



③ Push down using your palms as above to hear clicks.

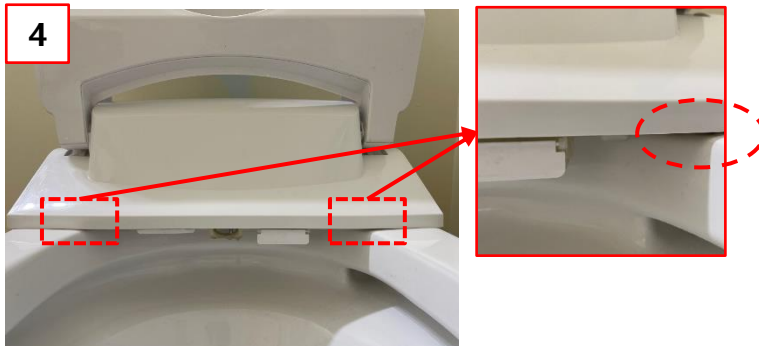

④ Check whether the cover base is assembled perfectly. If you heard clicks, it's perfectly done.



⑤ Screw the 2 screws back using a Phillips head driver.



[Click for the Video Guide](#)

How to change the SIDE IR Receiver

4. Turn on the Water shutoff valve and plug the cord



① Fully open the water valve in counterclockwise.

If the supply water pressure is too high, it may cause malfunction.
Please check the supply water pressure and adjust the valve just enough to flush.

② Plug the cord back in

! Please test the function again at this stage. If the problem is not resolved, please contact our customer support team so that we can provide a replacement unit with a prepaid return label.