

DECATONE

TARMAC BINDER solvent based

PERFORMANCE ADVANTAGES

- > Strong, flexible
- > Single pack
- > Binds the concrete's top surface to help it last longer
- > Single pack

Because this binder does NOT have a non-slip finish, it must be over-coated with Decatone Tennis Court Paint.

- > Based on white spirit solvent

USES

As a binding aid for old/new Macadam tennis courts, multi-play areas.

- > For airless spray application.

Special attention to be shown to areas under trees and shaded areas.

COLOUR RANGE


- > Clear

PACK SIZE

- > 20 litre metal containers.

SPREADING RATE

Dependent on surface, but as a general guide new and sound surfaces at a coating rate of 6-8 square metres per litre, ie. (75 -100 litres per coat) and for badly fretting surfaces at 3 square metres per litre.

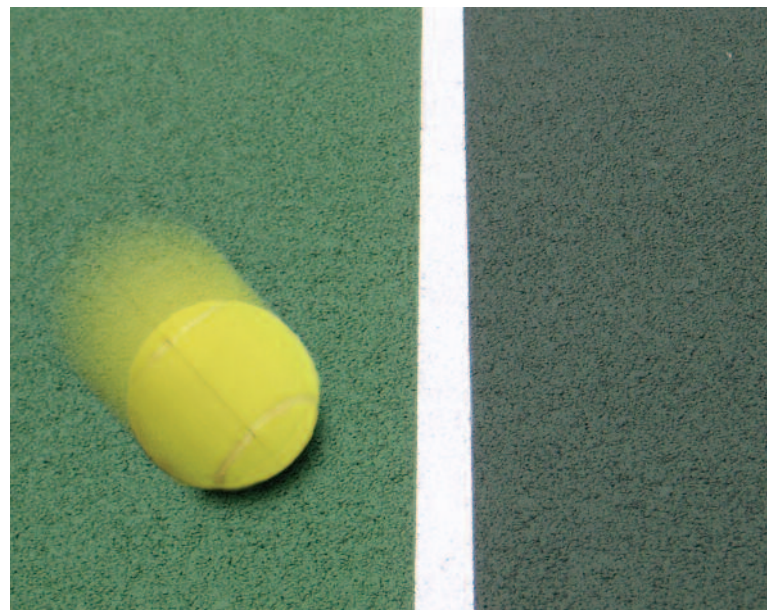

DRYING TIME

Under ambient conditions between 1-2 hours at the recommended spreading rate. For badly fretting surfaces where a thicker film is applied the drying could be 2-3 hours, depending on temperature and humidity and time of year. Can be applied in less favourable weather conditions than water based paints.

SHELF LIFE

- > Up to 2 years if stored correctly in an unopened container.

PREPARATION

All surfaces are to be clean, dry and free from moss, dirt, grease and vegetative growth. Vacuum or pressure blasting with water may remove any debris. Brushing (manual or machine) may be suitable. Loose stones lying on the surface have to be removed. Any repairs to the surface must be done prior to application.



SUBSTRATE

New surfaces should be left to oxidise for at least three weeks in summer and up to 3 months during winter before applying the Tarmac Binder.

APPLICATION

- > **STIR WELL BEFORE USE**
- > Do not apply below 5°C.
- > Application by airless spray for best results in one coat.
- > Tip sizes in the range of 12thou – 15thou are recommended.
- > Do not apply if the surface is damp.
- > Can be re-coated when dry or within a week of application.

CLEANING

- > Clean all equipment with white spirit after use.

PRECAUTIONS

- > **Flammable** keep away from sources of ignition.
- > Ensure good ventilation during application.
- > Wear gloves, goggles and suitable protective clothes.
- > In case of contact with eyes rinse immediately with plenty of water and seek medical advice.
- > Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- > Keep out of reach of children.
- > Do not use near fishponds.
- > Toxic to aquatic organisms. May cause long term adverse effects in the aquatic environments.
- > Do not empty into drains.

SOLVENT-BASED PAINTS

Solvent vapour (white spirit) does not present a problem providing they are correctly applied in accordance with the can instruction, or product data sheet.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Britannia Paints Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.



Certificate Number 8516
ISO 9001



Unit 7/8 King Street Trading Estate, Middlewich, Cheshire CW10 9LF
T: 01606 834015 F: 01606 837006 E: sales@britanniapaints.co.uk www.britanniapaints.co.uk

Version 13 / Apr 2020