


HEAVY DUTY LINE MARKING PAINT

SOLVENT BASED CHLORINATED RUBBER COATING

A HEAVY DUTY ,QUICK DRYING LINE MARKING PAINT FOR CAR PARKS,PLAYGROUNDS & INDUSTRIAL FLOORS

PERFORMANCE ADVANTAGES

- > Heavy duty, suitable for high traffic areas
- > Quick drying, even at low temperatures
- > Suitable for external or well-ventilated Internal areas
- > Heavy duty chlorinated rubber formulation

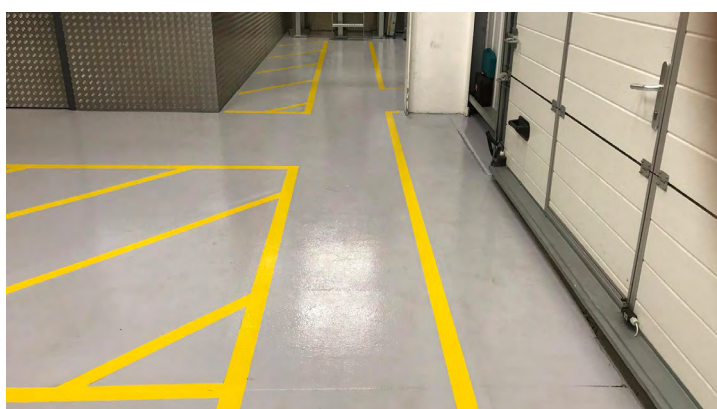

USES

- > Used on car parks, playgrounds and Industrial floors. Suitable for a wide range of surfaces including bare concrete, asphalt and previously painted floors. It is ideal for areas where a long shut down period would be a problem.
- > Can be brush or roller (solvent resistant) applied.

COLOUR RANGE

- > White, Yellow.

PACK SIZE

- > 2.5 litre.

SPREADING RATE

- > 2.5 litres will cover approximately 125 metres of 100 mm wide line.

DRYING TIME

- > Touch Dry in 45 minutes at 20°C.
- > Foot Traffic in 2-3 hours at 20°C.
- > Wheel traffic in 6-8 hours at 20°C.

Curing of the coating can be extended at lower temperatures, dependent on coating thickness, substrate and texture.





PREPARATION

- > Ensure surfaces are clean, dry and free from any loose material. Remove any dirt ,oil, surface laitance.

LIMITATIONS

- > Not recommended for use on newly laid polymer screeds.
- > If in doubt do a small test area.
- > **ALWAYS** conduct a small test area before using on existing paint.

APPLICATION

- > **STIR WELL BEFORE USE.**
- > Please follow the coverage rates shown in **SPREADING RATE** section.
- > Apply by roller or brush between 5°C - 30°C
- > As dictated by normal painting practice. In confined spaces, provide adequate ventilation during the Application and drying.

CLEANING

- > Remove as much paint as possible from application equipment before cleaning.
- > For cleaning equipment use Britannia Special Solvent (not white spirit).

SHELF LIFE AND STORAGE

- > Up to one year in an unopened original container at Moderate temperatures.
- > Store in a safe place in accordance with the instructions in section 7 of the relevant MSDS sheet.

PRECAUTIONS

- > **Flammable** keep away from sources of ignition.
- > Ensure good ventilation during application.
- > Wear gloves, goggles and suitable protective clothing.
- > In case of contact with eyes rinse immediately with plenty of water and seek medical advice.
- > Remove splashes from the skin with a recognised hand cleaner or plenty of soap and water.
- > Keep out of reach of children.
- > Do not use near fishponds.
- > Harmful to aquatic organisms. May cause long term adverse effects in the aquatic environments.
- > Do not empty into drains.

SAFETY

Keep container in a well-ventilated place. Keep away from sources of ignition. Wear suitable clothing and gloves. Only for use externally or well-ventilated internal areas. The product and container must be disposed of as hazardous waste.

The specification and coverage rates are given in good faith and are based on our experience and knowledge but without liability.

As Britannia Paints Limited has no direct control over the methods employed by the user in applying its products, any warranty either written or implied is given in good faith and can only cover the material itself.

If in doubt regarding any of the above points, please contact our technical services department for advice.

A Material Safety Data Sheet is available on request.

It is the users responsibility to ensure that this data sheet is current prior to using the product.



Certificate Number 8516
ISO 9001



Unit 7/8 King Street Trading Estate, Middlewich, Cheshire CW10 9LF
T: 01606 834015 F: 01606 837006 E: sales@britanniapaints.co.uk www.britanniapaints.co.uk

Version 01 / June 2025