


User's Manual



www.rbrohant.com

Installation Manual

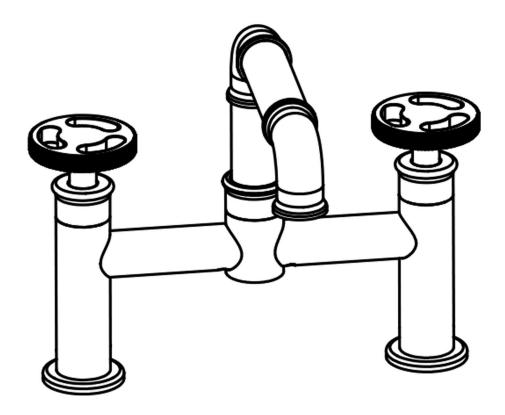

RB1132













IAPMO RESEARCH AND TESTING, INC.









CERTIFICATE OF LISTING



IAPMO RESEARCH AND TESTING, INC.













INSTALLATION STEPS


This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.





Before installing the product, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the product.














- 1. Check whether the diameter of the through hole on the installation table is the same as the size marked in Figure 2. If not, please open the hole.
- 2. Take the faucet out of the box, remove the copper nut and Silicone gasket on the Spout tube, install them in sequence according to Figure 3, and the bottom is covered with a Silicone gasket and the copper nut in turn. the copper nut is tightened, fixed with a wrench.
- 3. The two Supply hoses installed on the switch spool are passed through the through-hole of the countertop, and the bottom is covered with a Silicone gasket and the copper nut in turn. After the copper nut is tightened, fixed with a wrench.
- 4. Connect the two Supply hoses to the leftmost and rightmost sides of the main body and tighten them, and connect them to the angle valve in the order of hot left and cold right. Then install the connector on the Spout tube in the middle of the main body, and then pull the Supply hoses from the table on the countertop.
- 5. Install the Supply hoses according to Figure 3 to complete the installation. (As shown in Figure 4)

CLEANING CARE

In order to keep the appearance of product clean, bright and good performance, please take care of the product as follows;

- 1.Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect:
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc;
- 4.Do not use acid cleaner, or cleaner and soap with insoluble gran etc;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show,

The bubbler can be unscrewed, rinsed with water, and then installed back in place.





Please feel free to contact us if you have any questions. We will help to solve the issue together with you. OUR EMAIL: services@rbrohant.com





Service Contact:

+1(801) 800-9309 services@rbrohant.com

Made in China