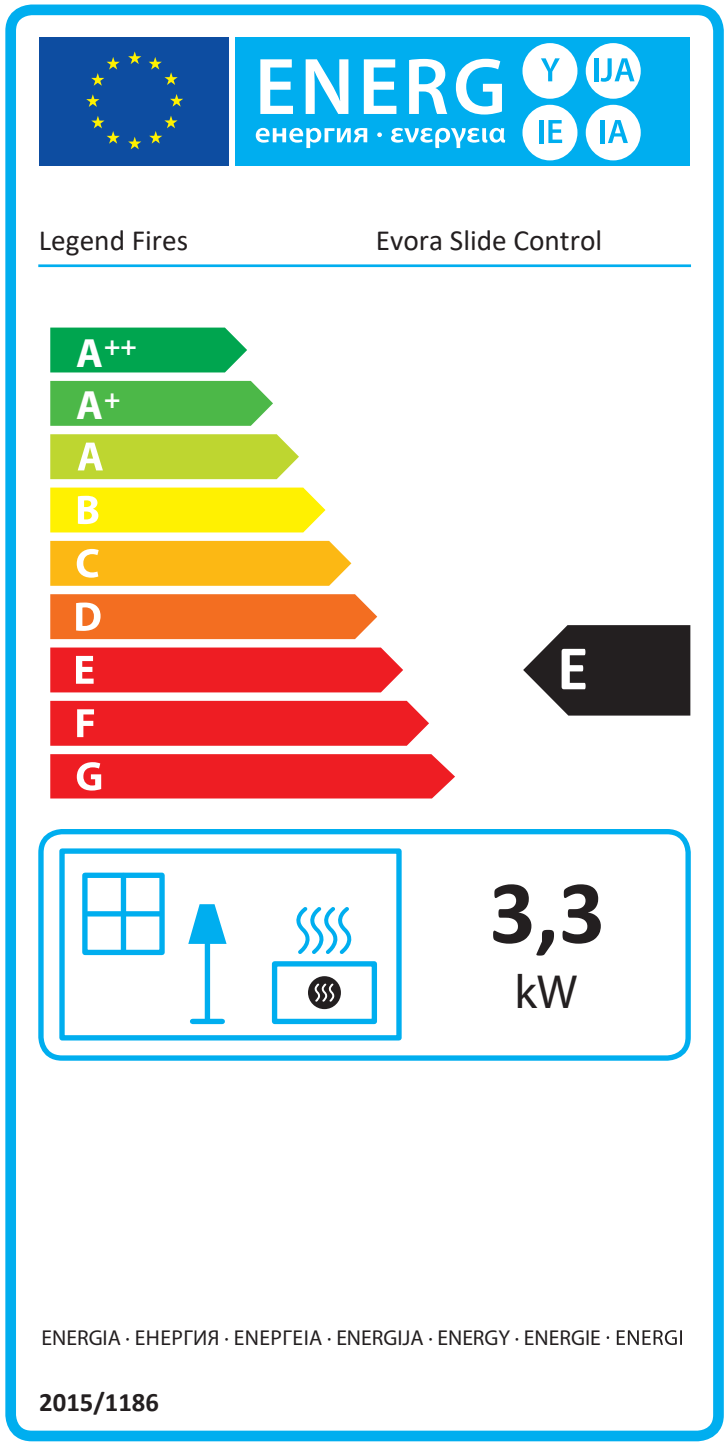

Model identifier(s):	Evora CF Slide Control
Indirect heating functionality:	[no]
Direct heat output: ...(kW)	3,3
Indirect heat output: ...(kW)	0,0

Fuel			Space heating emissions * NO_x
Select fuel type	[gaseous / liquid]	[specify]	**[mg/kWh$_{input}$] (GCV)**
	Gaseous	G20	130

Item	**Symbol**	**Value**	**Unit**
Heat output			
Nominal heat output	P_{nom}	3,3	kW
Minimum heat output (indicative)	P_{min}	1,8	kW
Auxiliary electricity consumption			
At nominal heat output	el_{max}	0,000	kW
At minimum heat output	el_{min}	0,000	kW
In standby mode	el_{SB}	0,000	kW
Permanent pilot flame power requirement			
Pilot flame power requirement (if applicable)	P_{pilot}	0,170	kW

Item	**Symbol**	**Value**	**Unit**
Useful efficiency (NCV)			
Useful efficiency at nominal heat output	$\eta_{th,nom}$	80,1	%
Useful efficiency at minimum heat output (indicative)	$\eta_{th,min}$	80,1	%

Type of heat output / room temperature control (select one)	
single stage heat output, no room temperature control	[no]
two or more manual stages, no room temperature control	[no]
with mechanic thermostat room temperature control	[no]
with electronic room temperature control	[no]
with electronic room temperature control plus day timer	[no]
with electronic room temperature control plus week timer	[no]
Other control options (multiple selections possible)	
room temperature control, with presence detection	[no]
room temperature control, with open window detection	[no]
with distance control option	[no]
with adaptive start control	[no]
with working time limitation	[no]
with black bulb sensor	[no]

Contact details	Legend Gas Fires Ltd. Unit 404 Glenfield Park Business Centre, Blakewater Road, Blackburn, Lancashire. BB1 5QH

* NO_x= nitrogen oxides