


Monitor Wall Mount

Instruction Manual

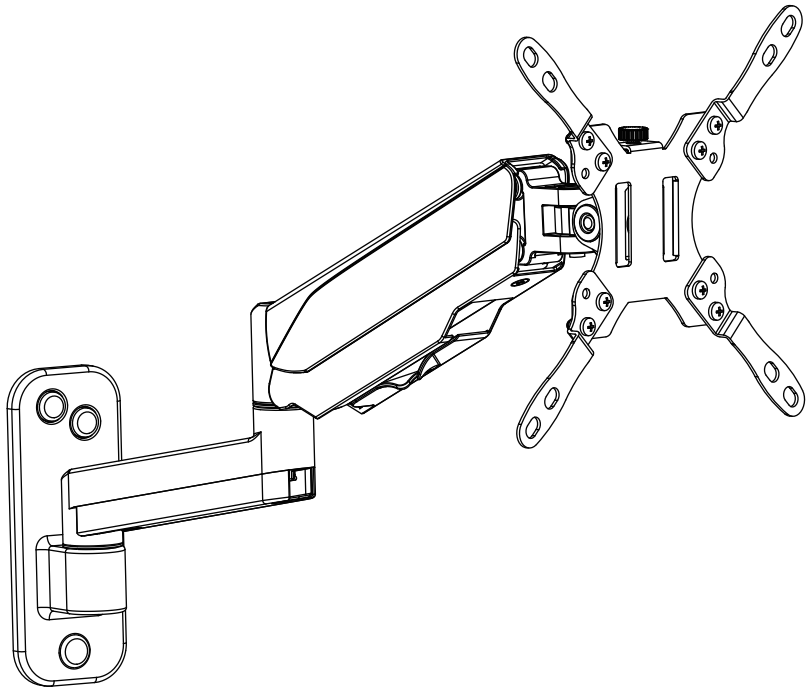


⚠ WARNING!

If you have any confusions or are not quite sure about the installation, please do not hesitate to ask for our help.


Before assembly, please check and make sure all necessary accessories are included and undamaged. Improper installation, such as use the product for monitors over its load capacity or for any purpose not explicitly specified, may cause damage or serious injury. We would not be liable for any damage or injury caused by improper mounting or inappropriate use.

The kit contains small items that could be choking hazards if swallowed. Please keep them OUT OF REACH OF CHILDREN UNDER 3 YEARS OLD. ADULT SUPERVISION IS REQUIRED.


PACKAGE CONTENTS



A (x1)
Arm Assembly




B (x1)
VESA Plate




C (x1)
Bolt

D (x3)
Decorative Cover

E (x1)
6mm Allen Key



F (x2)
Extend Bars



G (x2)
Extend Bars




H (x8)
Flange Nuts



I (x8)
M4 x 12mm




J (x1)
Wrench

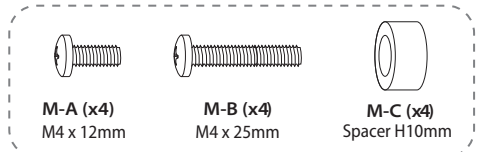

M-A (x4)
M4 x 12mm

M-B (x4)
M4 x 25mm

M-C (x4)
Spacer H10mm



W-A (x3)
Lag Bolt M6 x 55mm



W-B (x3)
Concrete Anchor Φ 9.6 x 43mm



W-C (x3)
Washer

NOTE: Not all hardware included will be used.

Installation Tools (Not Included)

Wood Stud Installation



Stud Finder



Awl



Wood Drill
 ϕ 3/16"(ϕ 4.5mm)


Concrete Installation



Concrete Drill
 ϕ 3/8"(ϕ 10mm)



Hammer



Level



Pencil



Drill



Socket Wrench



Screwdriver

ASSEMBLY STEPS




WARNING

DO NOT install into drywall alone.


STEP 1: Attach Arm Assembly to Wall




OPTION A: Wood Stud Installation




Locate your studs. Verify and mark the center of the stud by finding the stud edges using awl and stud finder.

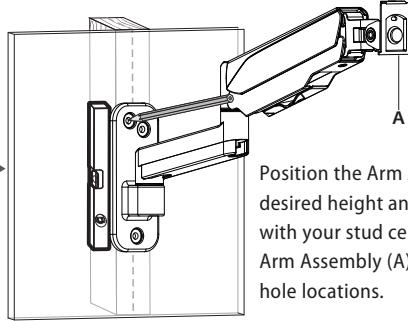


Position the Arm Assembly (A) at your desired height and line up the holes with your stud center line. Level the Arm Assembly (A) and mark the pilot hole locations.



Note: Pilot holes should be drilled into a depth of 55mm (2.2")




Drill pilot holes using a $\varnothing 3/16$ in. ($\varnothing 4.5$ mm) diameter drill bit.



Caution:

Do not use anchor in drywall or wood!

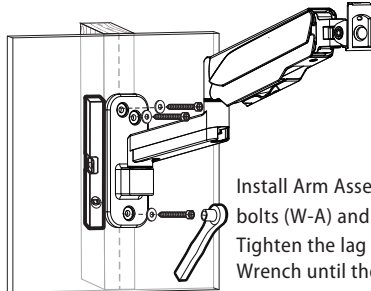


Install Arm Assembly (A) using lag bolts (W-A) and washers (W-C). Tighten the lag bolts with Socket Wrench until they are pulled firmly against the Arm Assembly (A).




STEP 1: (Continued)




OPTION B: Solid Concrete Wall Installation

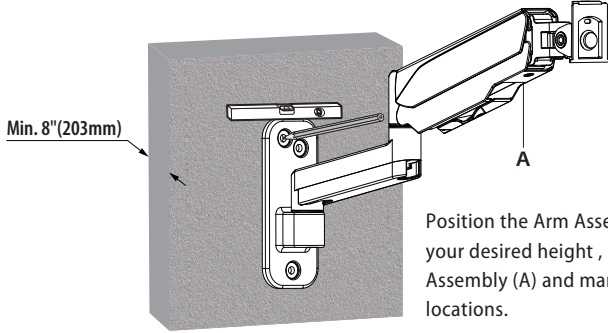




Position the Arm Assembly (A) at your desired height, level the Arm Assembly (A) and mark the pilot hole locations.



Note: Pilot holes should be drilled into a depth of 60mm (2.4")





Drill pilot holes using a $\phi 3/8"$ ($\phi 10$ mm) diameter drill bit.

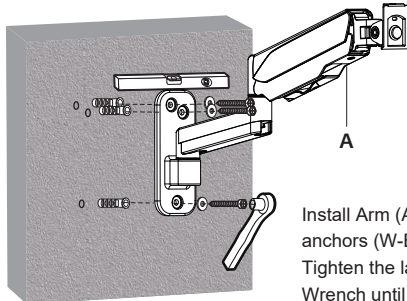

Install Arm (A) using lag bolts (W-A), anchors (W-B) and washers (W-C). Tighten the lag bolts with Socket Wrench until they are pulled firmly against the Arm (A).

STEP 2: Attach Decorative Cover


Attach Decorative Covers (D) to Lag Bolts (W-A).

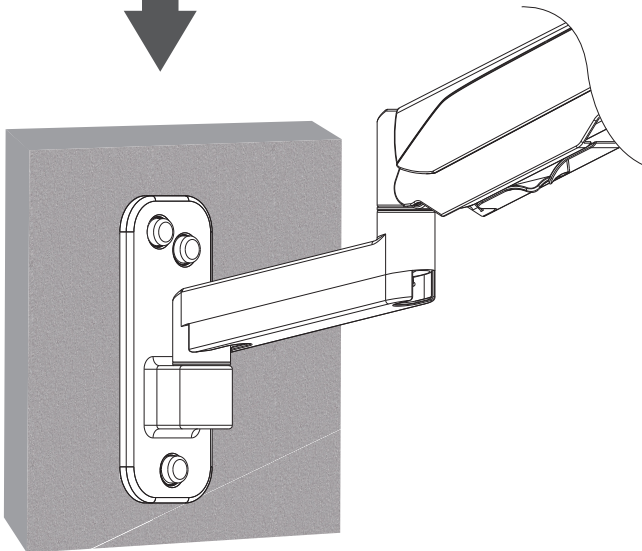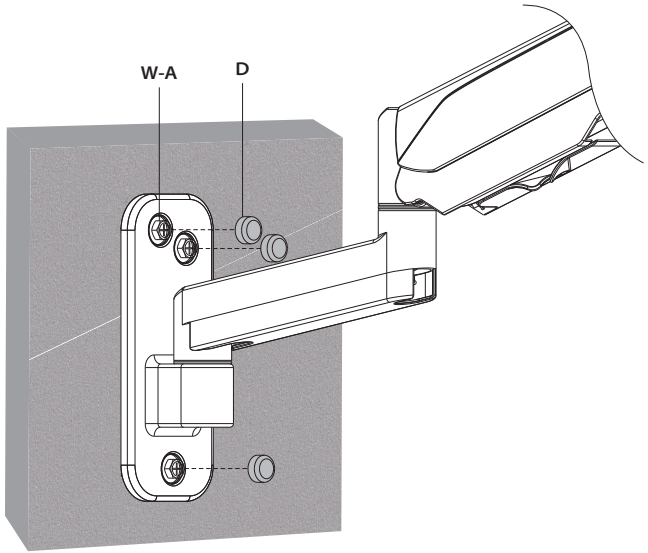



STEP 3: VESA Configures

VESA pattern (WxH)	Configuration
75mm x 75mm	A
100mm x 100mm	A
200mm x 100mm	B
100mm x 200mm	C
200mm x 200mm	D



A for VESA hole pattern:
75x75mm, 100x100mm





B for VESA hole pattern: 200x100mm

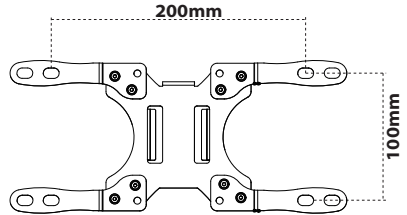

C for VESA hole pattern: 100x200mm





D for VESA hole pattern: 200x200mm



STEP 4 : Attach Monitor




OPTION A: Flat Back Monitor

Attach the VESA plate (B) to back of monitor and secure it by using a 6mm Allen Key(E) to tighten screws(M-A) Do not tighten the screws excessively or your monitor might be damaged.

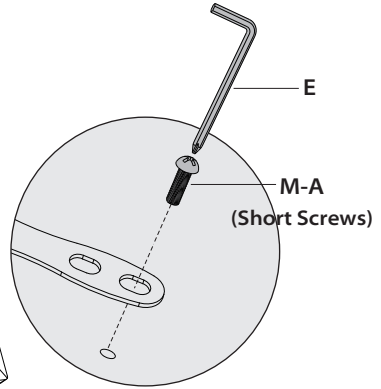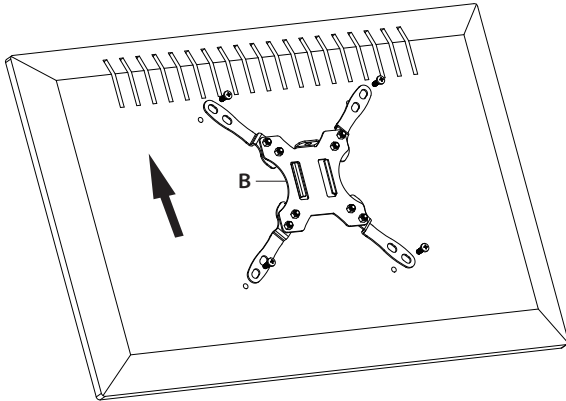

OPTION B: Curved Back Monitor


Attach the VESA plate (B) to back of monitor and secure it by using a 6mm Allen Key (E) to tighten screws (M-B) along with spacers (M-C). Do not tighten the screws excessively or your monitor might be damaged.

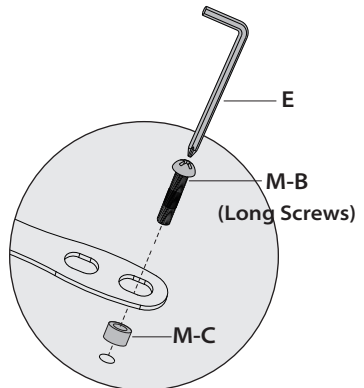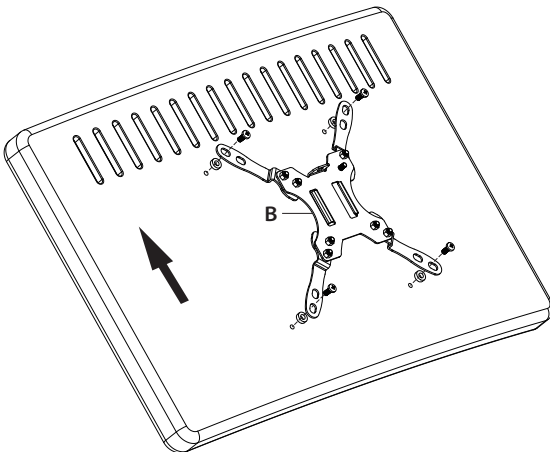

NOTE: Hand tighten screws to avoid over tightening.

STEP 5: Hang Monitor

Slide the monitor onto the head of swivel arm, install the security bolt (C). Make sure the security bolt is installed before you rotate the monitor.

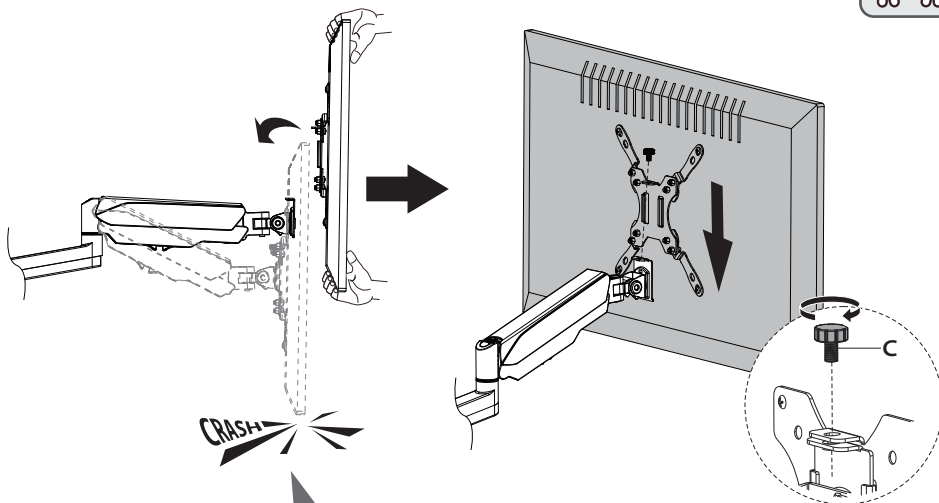


Important Notice:

The gas spring is pre-set to minimum tension. Once the monitor is hung on, hold the monitor with both hands and DO NOT let go suddenly or immediately. Instead, leave the monitor in a slow & gentle way while observing whether the arms will fall down wildly.



Guideline to adjust monitor tilting angle.

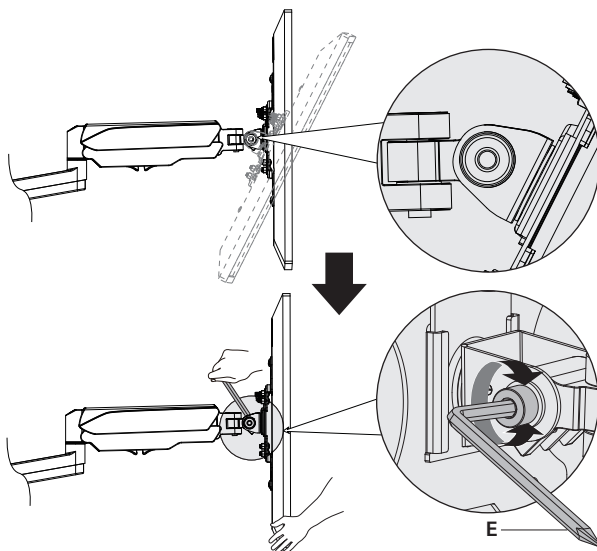

Problem:


If monitor face down

Solution:

1. Loosen the tilting bolt.
2. Hold the bottom of monitor with one hand and adjust to determine your desired tilt angle.
3. Retighten the tilting bolt to fix the intended angle.


STEP 6: Adjust Tension

For intended functioning of the mount, you may need to adjust the tension of Upper Arm (A) in accordance with your monitor weight by 6 mm Allen Key (E).

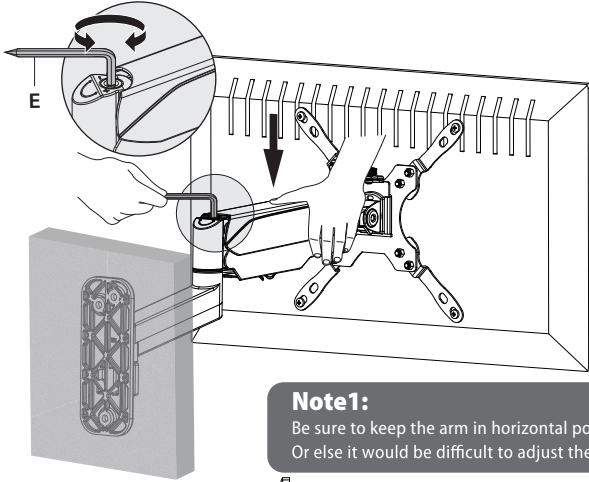

Note1:

Be sure to keep the arm in horizontal position during adjustment. Or else it would be difficult to adjust the mount or damage the mount.

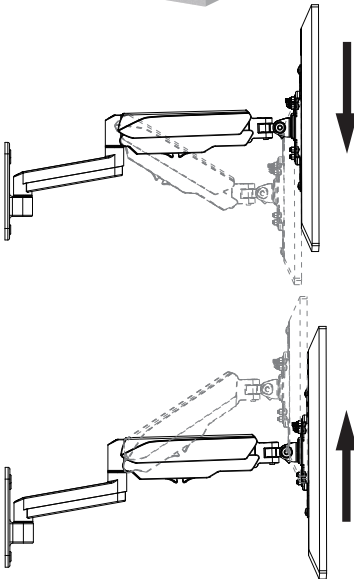

Situation 1: Arm falls down

Upper Arm with monitor falls down and fails to stay where intended.

Solution:

Turn the inside screw counterclockwise(“+”direction) to increase gas spring tension until the arm can stay as intended.



Situation 2: Arm rises up

Upper Arm with monitor rises up and fails to stay where intended.

Solution:

Turn the inside screw clockwise(“-”direction) to decrease gas spring tension until the arm can stay as intended.


Note2:

As for how many circles the screw should be turned, the table below is for reference.


Monitor Weight	4.4lbs (2kg)	6.6lbs (3kg)	11lbs (5kg)	17.6lbs (8kg)	19.8lbs (9kg)	22lbs (10kg)	26.4lbs (12kg)
Circles (AT LEAST)	min	2	6	10	11	12	max

STEP 7: Cable Management

Remove bottom plastic covers from gas spring arm as shown in diagram.

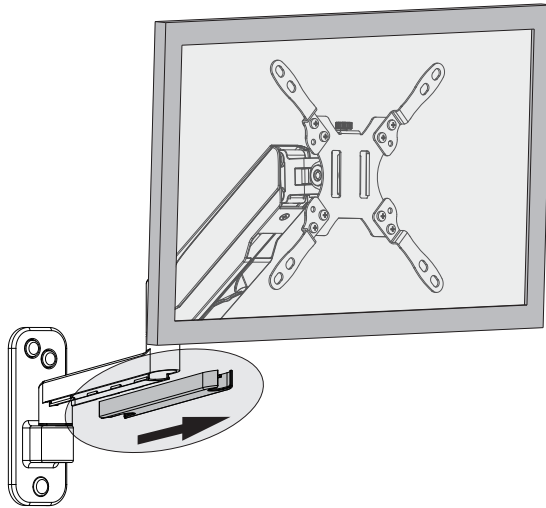


Run cables from monitor through bottom of gas spring arm.
Reattach plastic covers as shown in diagram.

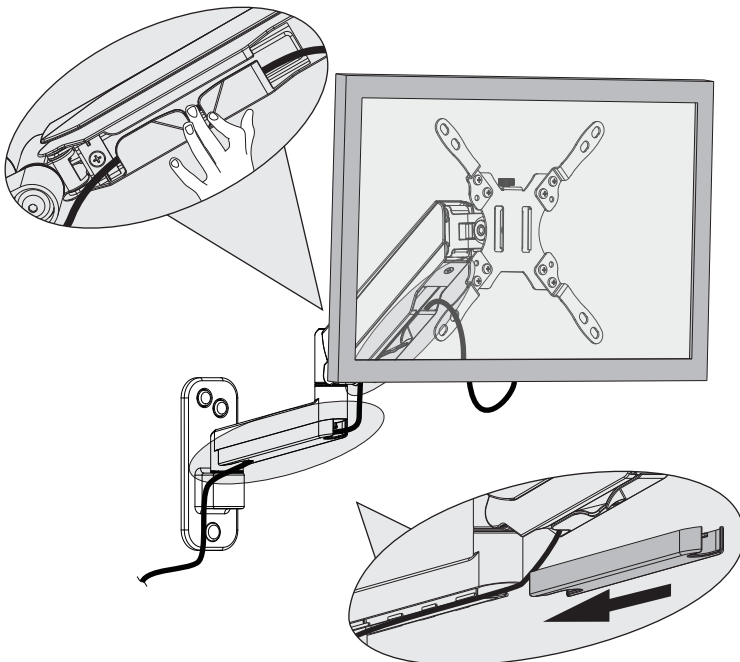

Adjust as Desired

Adjust monitor position and rotation.


- Tilt
- Swivel
- Rotation
- Height

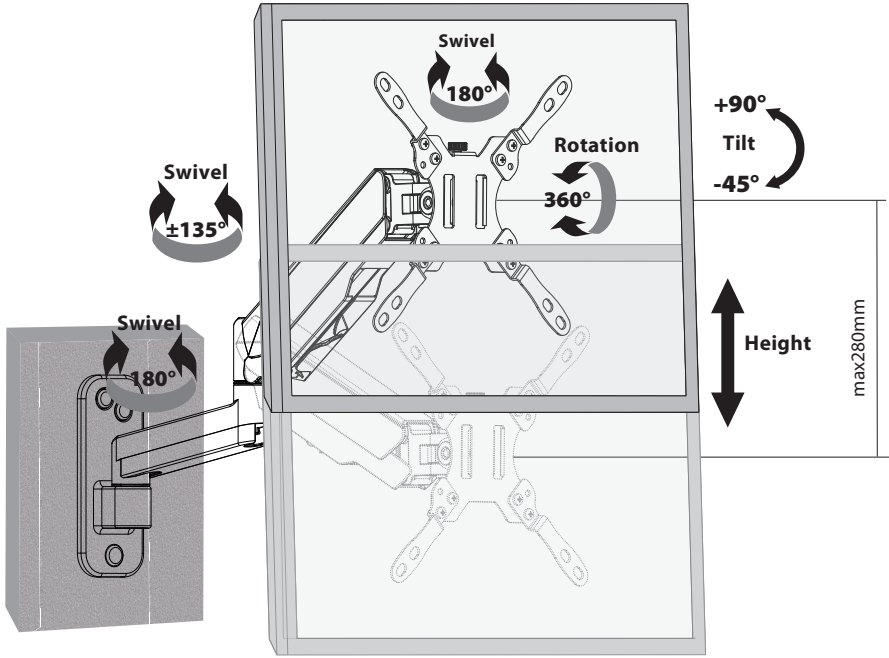


Note: To ensure stability, the tightness of the rotating axis has been preset, so it would be kind of difficult to rotate the VESA plate.

Suggestion: Please attach the monitor first, then hold the two sides of it with both hands, and rotate vigorously.

If that doesn't work out, please do not hesitate to ask for our help.



Product Dimensions

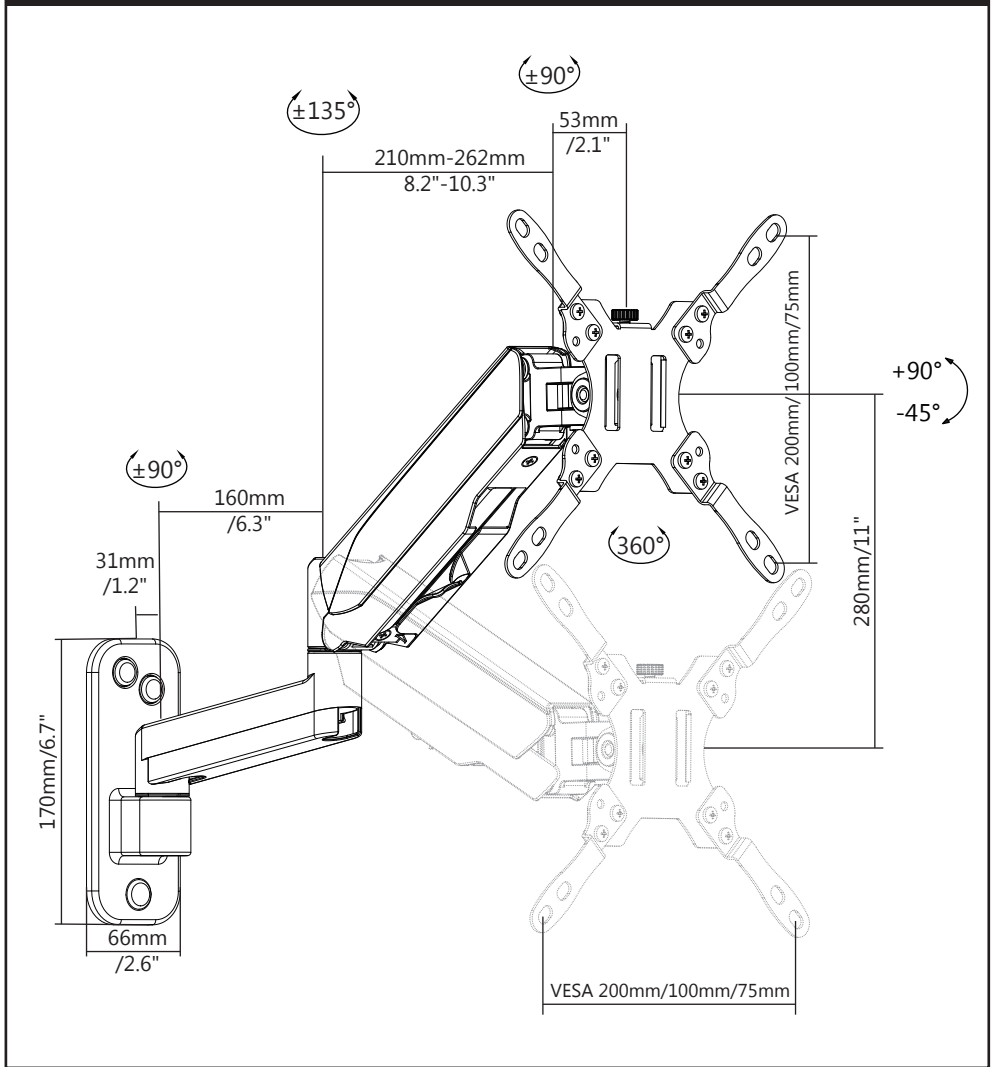

CAUTION AND MAINTENANCE:

- Never allow children to climb, stand, hang, or play on any part of monitor or stand.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.
- Check that the bracket is secure and safe to use at regular intervals (at least every three months).