

Warning:

- 1.The Ride-On car is designed for children aged 18-36 months.The rider's weight must not exceed 25kgs.
- 2.The product is designed to only seat 1 child at a time to avoid injuries.
- 3.Parental guidance and supervision are strongly advised to ensure safe riding.
- 4.Adult assembly and thorough installation of all components are essential for safety.
- 5.Avoid going near streets, crossroads, traffic areas, swimming pools and stairs when riding the car.
- 6.To Reduce risk occasionally check to see that the nut and bold on the steering wheel are tight and secure.
- 7.Dangers may occur if the product is not correctly assembled.
- 8.Ensure shoes are worn before using the ride-on.

Battery Handling:

- 1.Battery must be handled by adults only.
- 2.Always replace exhausted batteries.
- 3.Use 2 xAA size batteries (not included) to make the lights and sound work.
- 4.Alkaline batteries are recommended.
- 5.Always remove batteries when the unit is not going to be used for anextended period of time.
- 6.When replacing new batteries,always replace all batteries.
- 7.Do not mix old and new batteries.
- 8.Do not mix Alkaline,Standard(Carbon-Zinc),or Rechargeable (Nickel-Cadmium)batteries.
- 9.Do not dispose of batteries in fire,as they may explode or leak.
- 10.Non-rechargeable batteries should never be recharged.
- 11.Remove rechargeable batteries from the toy before charging.
- 12.Rechargeable batteries ashould be charged only under adult supervision.
- 13.Batteries are to be inserted with the correct polarity.
- 14.Do not short-circuit the supply terminals

COMPONENTS LIST

1、 Car Body 1PC	2、 Steering wheel 1PC	3.Backrest 1PC
4.Wheel 4PCS	5.Wheel Cap 4PCS	6.Anti-tumble Shelf 1PC
7.J-shaped Stick 1PC	8.Rear Wheel Axle 1PC	9.Ring 4PCS
10、 Washer 5PCS (1 replacement piece)	11、 Cotter Pin 4PCS (1 replacement piece)	

Item No: 656-P
Activity Ride-On
Instructions Manual


⚠ **WARNING**
ADULT ASSEMBLY
REQUEST.



18-36
months


INSTRUCTIONS

Step 1




1.Place the anti-tumble shelf into the rear of the body.

Step 2




2.Insert the rear wheel axle through washer, wheel, plastic ring into the body, tighten using a cotter pin.

Step 3




3.Assemble the two front wheels, insert the plastic ring, wheel and washer, tighten using a cotter pin.

Step 4

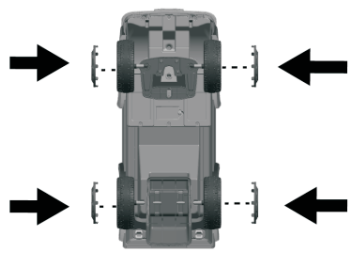


4.Place the four wheel caps into the four wheels.

Step 5

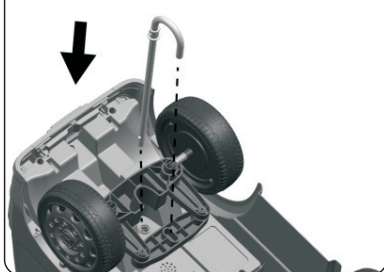


5.Install the J-shaped stick at the assigned location as picture.

Step 6

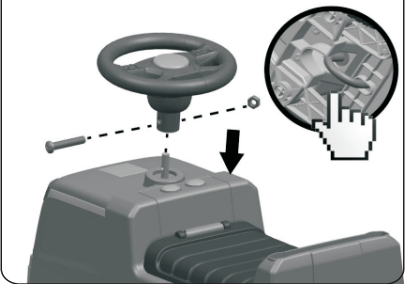


6.Loosen the bolt and nut in the steering wheel first, then place the steering wheel over the J-shaped stick, insert the bolt and tighten the nut with a screwdriver.

Step 7

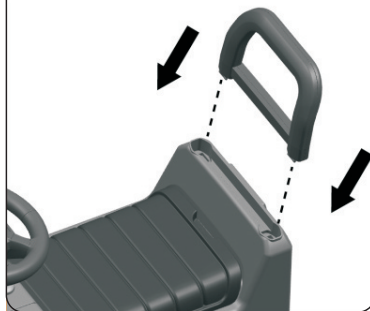

7.Insert the backrest over the hole in the rear of the body, be certain the backrest is completely seated.

BATTERY CHANGE

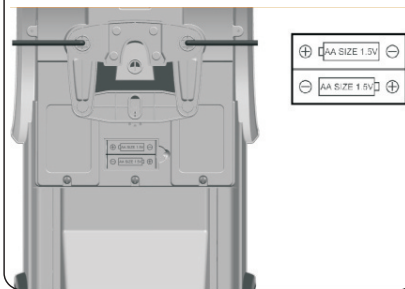

Trun over the car body, and find the battery house. Loosen the screws with a screwdriver. Put 2 AA batteries in the battery house, then tight the screw with a screwdriver.