


DSP

UNC THREADS

DOUBLE SWIVEL LIFTING POINT

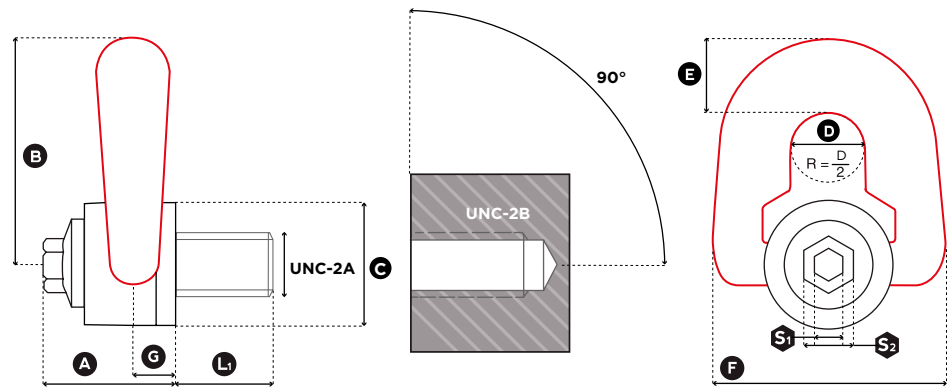

1 in = 25.4 mm

| Reference | Diameter | SF 5:1 WLL (lbs) | Standard L ₁ (mm) | Torque (ft-lb) | S ₁ (mm) | S ₂ (mm) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | Weight (kg) |
|-----------|--------------|------------------|------------------------------|----------------|---------------------|---------------------|--------|--------|--------|--------|--------|--------|--------|-------------|
| DSP U 516 | UNC 5/16"-18 | 1,000 | 15 | 7 | 8 | 16 | 33 | 56 | 30 | 19 | 19 | 58 | 9,5 | 0,3 |
| DSP U 038 | UNC 3/8"-16 | 1,300 | 17 | 8 | 8 | 16 | 33 | 56 | 30 | 19 | 19 | 58 | 9,5 | 0,3 |
| DSP U 050 | UNC 1/2"-13 | 2,400 | 21 | 12 | 8 | 16 | 33 | 56 | 30 | 19 | 19 | 58 | 9,5 | 0,3 |
| DSP U 058 | UNC 5/8"-11 | 3,900 | 27 | 40 | 8 | 16 | 45 | 81 | 45 | 25 | 27 | 79 | 13,0 | 1,0 |
| DSP U 075 | UNC 3/4"-10 | 5,250 | 30 | 80 | 8 | 16 | 45 | 81 | 45 | 25 | 27 | 79 | 13,0 | 1,0 |