


MERCO TAPE – TECHNICAL DATA SHEET

Merco M300 series General Purpose Grade Duct Tape

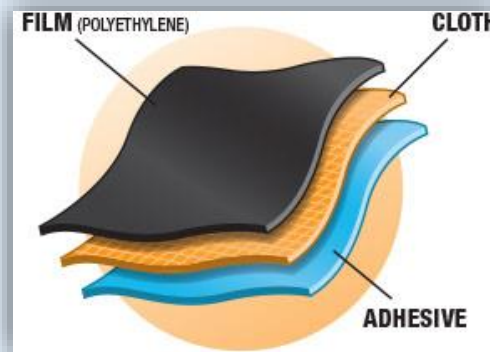

Merco M300 General Purpose Grade Duct Tape is a PE coated duct tape suitable for general use. Highly conformable and hand-tearable M300 Duct Tape also resists twisting and curling. Its natural rubber adhesive system bonds well to most surfaces and offers good all-climate performance. M300 can contribute towards satisfying EQ Credit 4.1 under LEED®

Merco M300 General Purpose Grade Duct Tape is frequently used for maintenance and general repair, bundling, patching and mending, joint sealing and pipe wrapping. Some even use it for heavy-duty box sealing. Although we do offer our M306 and M307 Duct Tapes this is about the minimum you would want for anything above home-owner quality. The raw stock we use is made in America by a major US manufacturer.

	Imperial UOM	Metric UOM	Test Method
Total Thickness	8.0 mil	.203 mm	ASTM D-1000
Adhesion to Steel	55 oz/in	6.02 N/cm	PSTC-101
Tensile Strength	22 lb/in	38.53 N/cm	PSTC-101
Elongation	5 %	5 %	ASTM D-1000
Operating Temperature	40F – 200F	4C to 93 C	ASTM D-1000
VOC Content		Less than 1 g/L	

Recommended Storage Conditions: 60F-80F at 40 - 60% Relative Humidity

Standard Shelf Life at 77F – 25C: 36 months from Date of Manufacture

Merco Tape

Info@MercoTape.com

(845) 357-3699

Buy@MercoTape.com

www.MercoTape.com

www.ElectricalTape.com

www.MaskingTape.com