



NASHUA® 357
Premium Grade Duct Tape


APPLICATIONS

- Heating, air conditioning, ventilating, and refrigeration applications.
- Asbestos removal applications.
- Sealing of seams and joints in metal air handling systems.
- Sand and media blasting applications.
- Manufacture of flexible duct equipped with metal collars.
- Bonding, protecting, holding, repairing, and patching.

FEATURES & BENEFITS

- Superior tensile strength.
- Clean release -- resists delamination.
- Conforms to a wide variety of surfaces.
- Outstanding performance over a wide temperature range.
- Tears straight, hangs straight, and resists curling.
- Preferred tape of professional contractors who demand a consistent, trouble-free product.
- Tested in accordance with UL 723.

CONSTRUCTION

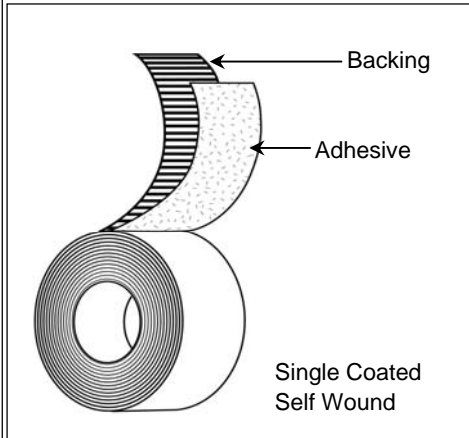

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Coated Cloth

Adhesive:

- Rubber

Colors:

- Black, Olive Drab, Red, Silver, White

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	13 mils	0.330 mm	ASTM D 1000
Adhesion to Steel	55 oz./in.	61.6 g/mm	PSTC-1
Adhesion to Aluminum	47 oz./in.	52.60 g/mm	PSTC-1
Tensile Strength	45 lb./in.	0.806 kg/mm	ASTM D 1000
Unwind Force	3.5 lb./in.	0.627 g/mm	ASTM D 1000
Maximum Performance Temperature	200 F		
Flame Spread	15		
Smoke Developed	20		
Elongation	7.5%		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.