


Premium Nuclear-Grade Duct Tape

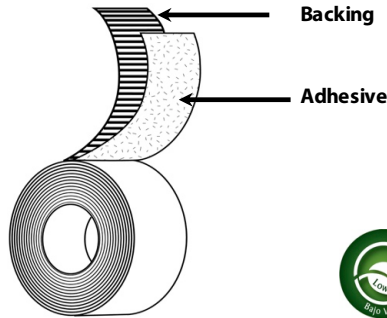

| | |
|------------------------|---|
| Backing: | PE Coated Cloth |
| Adhesive: | Rubber |
| Liner: | N/A |
| Colors: | Silver, Red |
| Specifications: | Meets NRC Reg 1.38 & ASME NQA-1 Tested in accordance with UL 723 |
| Standard Sizes: | 48mm x 55m, 72mm x 55m |

Applications

- Multiple uses in powerplants and on ships
- Heavy-duty packaging and bundling
- Color coding
- Media-blast protection
- Holding dosimeters, securing clothing and gloves, wrapping pipe ends, insulation and duct sealing

Features

- PE-Coated Cloth Backing
- Natural Rubber Adhesive
- Low VOC Content

Benefits

- High tensile strength for difficult applications
- Abrasion and puncture resistant
- Crisp, straight tear
- Moisture, solvent, and chemical resistant
- Aggressive adhesion to all surfaces - including extremely rough materials
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

| | Standard UOM | Metric UOM | Test Method |
|------------------------------|--------------|------------|-------------|
| Total Thickness | 13.0 mils | 0.330 mm | ASTM D-1000 |
| Adhesion to Steel | 95 oz/in | 10.39 N/cm | PSTC-101 |
| Tensile Strength | 50 lb/in | 87.56 N/cm | ASTM D-1000 |
| Operating Temperature | 40 to 200 °F | 4 to 93 °C | |
| Elongation | 13% | | ASTM D-1000 |
| VOC Content | <1 g/L | | |

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.