



**NASHUA® 557**  
Premium Grade UL181 B-FX  
Listed Duct Tape


**APPLICATIONS**

- Acts as a superior closure system for use with flexible air duct and air connectors
- Recommended for use on UL Listed flexible air ducts in accordance with manufacturer's installation instructions
- Ideal for heating, air conditioning, ventilating, and refrigeration applications
- Suitable for bonding, protecting, holding, repairing, and patching

**FEATURES & BENEFITS**

- UL 181B-FX Listed (for use with flexible air ducts and closure systems)
- Excellent adhesion and shear (holding power) performance
- Superior quality, performance, and tensile strength
- Excellent resistance to mold growth, humidity, flame spread, smoke generation, and the effects of high temperature
- Printed for easy identification

**CONSTRUCTION**

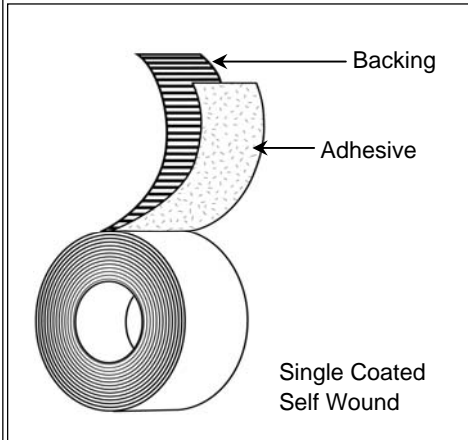

**PRODUCT DESCRIPTION**

**Single-Coated Construction**

**Backing:**

- Polyethylene Coated Cloth

**Adhesive:**

- Rubber

**Colors:**

- Silver, Black, Metallic

**TEST DATA**

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	13 mils	0.330 mm	ASTM D-1000
Adhesion to Steel	45 oz./in.	50.4 g/mm	PSTC-101
Adhesion to Backing	35 oz./in.	39.20 g/mm	PSTC-101
Tensile Strength	29 lb./in.	0.520 kg/mm	ASTM D-1000
Flame Spread	15		UL 723
Smoke Developed	15		UL 723
Maximum Performance Temperature	200F		

\*\*Recommended storage conditions: 40-60% Humidity, 60°F-80°F

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.