


POLYKEN®

227

Professional Grade Duct Tape

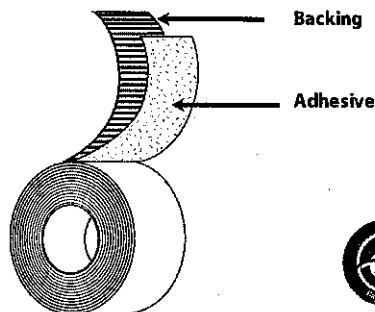

- Backing:** PE Coated Cloth
Adhesive: Rubber
Liner: N/A
Colors: Silver, Black
Specifications: Tested in accordance with UL 723
Standard Sizes: 48mm x 55m, 72mm x 55m

Applications

- Hanging and seaming poly sheeting
- Sealing and closure tape for poly bags
- General purpose duct and insulation sealing
- General purpose packaging and repair
- Temporary holding and bundling

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Low VOC Content

Benefits

- Good balance of tensile strength and tearability
- Conformable and moisture resistant
- Aggressive high adhesion
- Superior vertical hold
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	11 mils	0.279 mm	ASTM D-1000
Adhesion to Steel	70 oz/in	7.66 N/cm	PSTC-101
Adhesion to Backing	30 oz/in	3.28 N/cm	PSTC-101
Tensile Strength	24 lb/in	42.03 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
Standard Shelf Life (at 25 °C): 36 months from date of manufacture.