

COREtec Originals Classics VV023

Product Specifications

VV023 Style Number

Construction Waterproof Foamed Core


Edge Profile Micro Bevel **Nominal Dimensions** 5" wide, 48" long

	US Units	Metric Units
Actual Product Width	4.96"	13 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.314"	8 mm
Core Thickness	0.256"	6.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment	0.059"	1.5 mm
Thickness		
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	


Profile Angle/Tap **Country of Origin** Imported

Packaging

Area per Box 26.47 sq ft 2.45 sq m Pieces per Box 16 pcs Weight per Box 44.09 lbs 19.99 kg **Boxes per Pallet** 42 boxes

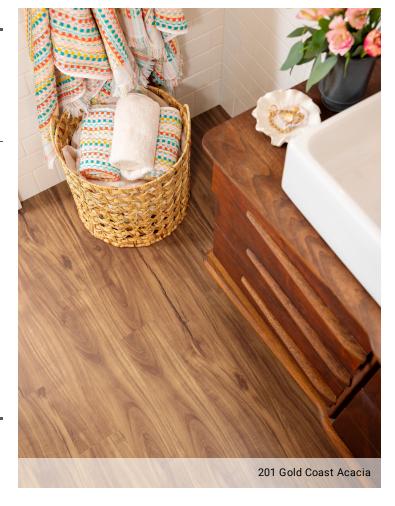

Colors

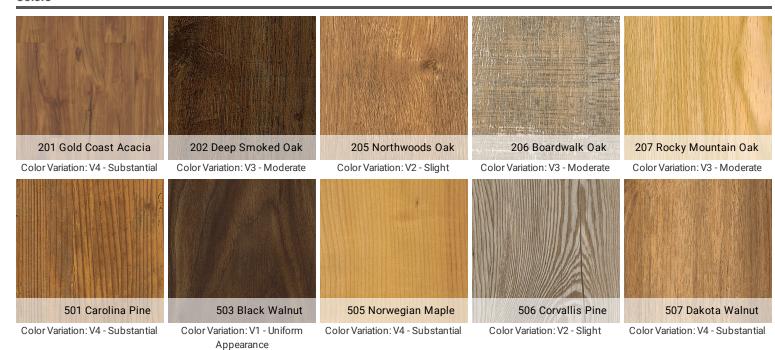

COREtec Originals Classics VV023





The list of colors below complements the entire range of colors available for the current product.

1 Test

Performance

Static Load (ASTM F970)

Residual Indentation (ASTM F1914)

Resistance to Heat (ASTM F1514)

Resistance to Light (ASTM F1515)

Resistance to Chemicals (ASTM F925)

Radiant Panel (ASTM E648)

Slip Resistance (ASTM D2047)

Passes

Passes

ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Coretec Lifetime Limited

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof

USF 10 Year Light Commercial

Com Ub Bond 4100/4151

COREtec Originals Classics VV023



Certifications

FloorScore Certified

GreenGuard (Certification, Gold, Private Label) Certified


Coordinating Trim



BT7CT | 94"

01V02 | 94"

01V04 | 94"





02V26 | 94"



Quarter Round QTRCT | 94" 01V27 | 94" 01V29 | 94"



Overlap Stairnose* 01V76 | 94" 01V78 | 94"



Flush Stairnose FS7HU | 94" 02V01 | 94" 02V04 | 94"



Overlap Reducer 01V52 | 94"

01V54 | 94"

*Packaged with molding track

Coordinating Metal Trim



Finish	Reducer
Satin Silver	USC20
Satin Nickel	USC21



i-woid	
USC23	
USC24	



USC17 USC18

Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

Stair Tread

Stair Tread

03Z70 | 48"



