

# Be



# Be Design features



### 1. Surround Colours

Available in two colours, black or white with a satin finish.

### 2. Internal Colour

The matte black interior finish is the perfect backdrop to showcase the flame.

### Robust materials

Crafted from mild steel, toughened glass and grade 304 stainless steel for durability.

### No Flue, No Chimney, No Electricity Connection

Our freestanding fireplaces offer an easy and immediate, environmentally friendly solution to adding warmth and ambiance to any location.

### 3. Practical Design

Opening 'doors' facilitates easy operation and refilling of the stainless steel burner, ensuring easy use and enjoyment.

### Quick and Easy Installation

With no installation or building works required, simply unpack, put into position, and off you go.

### Portable Fireplace

Fully portable, you can move the fireplace between rooms and outdoor spaces, or store away when not needed.

### Ground Fixing Brackets

Models come with fixing brackets for permanently locating into a fixed position.

### 4. Burner Colour

Available with a Stainless Steel or Black Burner.

### Environmentally-Friendly

Bioethanol fireplaces use an environmentally-friendly, renewable energy source that burns clean and delivers warming heat. You and your guests will enjoy the ambiance and tranquility of a real fire, without the hassles of burning real wood - no more embers, ash, and soot to clean up.

### Global Compliance

This model complies with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL 1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant.

### Included Accessories



Jerry Can with Safety Spout & e-NG bottle adaptor



Lighting Rod & Lighter







Jerry Can Spout Extension


# Be Specifications

Slimline, portable corner-style fireplace with two viewing sides. Ideal for smaller residential and commercial spaces.

## Burner Ventilation and Efficiency\*

| Dimensions<br>L x W x H mm/in        | Compatible<br>Burner | Fuel<br>Capacity    | Heats on<br>Average<br>(Indoors)                 | Thermal<br>Output Net<br>(MAX)     | Approx.<br>Burn Time | Minimum<br>Room Size                          |
|--------------------------------------|----------------------|---------------------|--|------------------------------------|----------------------|---|
| 420 x 420 x 1345<br>16.5 x 16.5 x 53 | AB3                  | 2.5 L<br>[0.7 Gals] | Over 20 m <sup>2</sup><br>[215 ft <sup>2</sup> ] | 6.14 MJ/h<br>5,800 BTU/h<br>1.7 kW | 8 - 11 hours         | 40 m <sup>3</sup><br>[1,413 ft <sup>3</sup> ] |

|                  |  |   |
|------------------|--|---|
| Application      | Indoor & Outdoor (Undercover)  |   |
| Surround Colours |  Black<br>ESF.D.BE3.BL  |  White<br>ESF.D.BE3.WH |
| Burner Colours   |  Stainless Steel  |  Black                 |
| Materials        | Grade 304 Stainless Steel Burner with optional Black Ceramic Coating, Toughened Glass Fire Screen, Mild Steel with High Temperature Powder-coating |   |
| Approx. Weight   | 40.5kg [89lbs]<br>Weight includes burner.  |   |
| Fuel Type        | e-NRG Bioethanol / <a href="http://e-NRG.com">e-NRG.com</a>  |   |

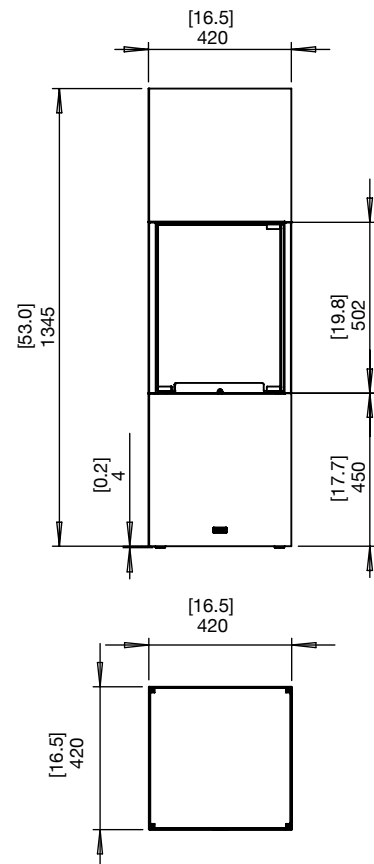

\*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.  
This model comes with fixing brackets for permanently locating into a fixed position.  
This model complies with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL 1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant.