

PiE AIR superLIGHT 195+ 195 Watt 20 V FULL BLK / TRNS



SUPER LIGHT

GLASS-FREE, SUPER FLEXIBLE AND FRAMELESS, NEVERTHELESS ROBUST SOLAR MODULE DUE TO ETFE WITH A NET WEIGHT OF 3.0 KG



EASY TO FIT

16 LONG HOLES FOR EASY AND UNIVERSAL USAGE



HIGH PERFORMANCE

USAGE OF SPECIAL MONOCRYSTALLINE SHINGLE SOLAR CELLS TO ABSORB THE MAXIMUM OF SUNLIGHT AND CONVERT INTO ENERGY





WARRANTY

6 YEARS PRODUCT WARRANTY

25 YEARS LINEAR PERFORMANCE WARRANTY (81% POWER ASSURANCE)

Type	PiE AIR superLIGHT 195+
Maximum Power (Pmax)	195W+
Maximum Power Voltage (Vmp)	20 V
Maximum Power Current (Imp)	9.75 A
Open Circuit Voltage (Voc)	24.4 V±3 %*
Short Circuit Current (Isc)	10.33 A±3 %*
Working Temperature	-20°C - +60°C
Power Selection	0~5W
Maximum System Voltage	IEC 1000V
Module Efficiency (%)	> 19,4 %
Certification	CE – RoHS – ISO IEC 61730 - IEC61215 - IEC61000



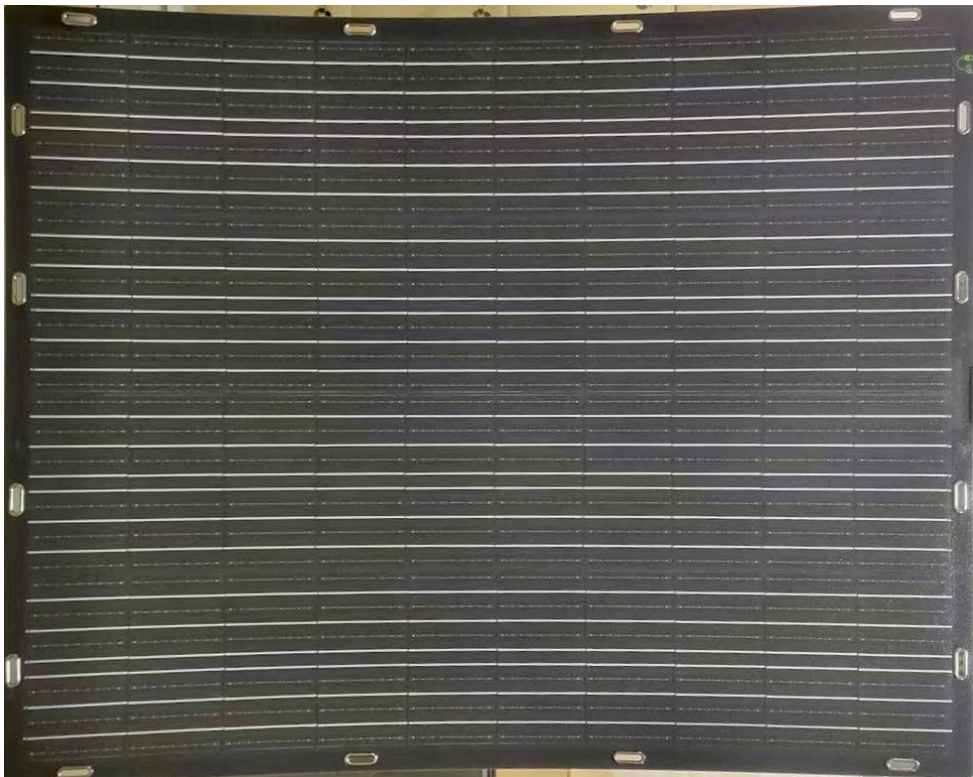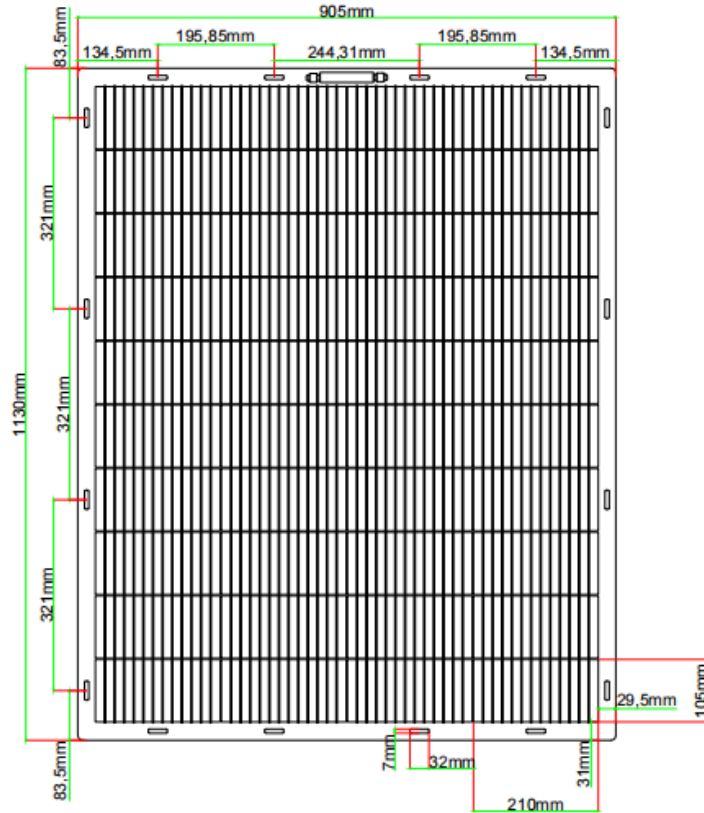

SIZE: 905 x 1130 x 3 mm

