


# INSTRUCTIONS

Initial winding and setting

A. Wind the watch manually (position 1).

B. Set the time (position 2).

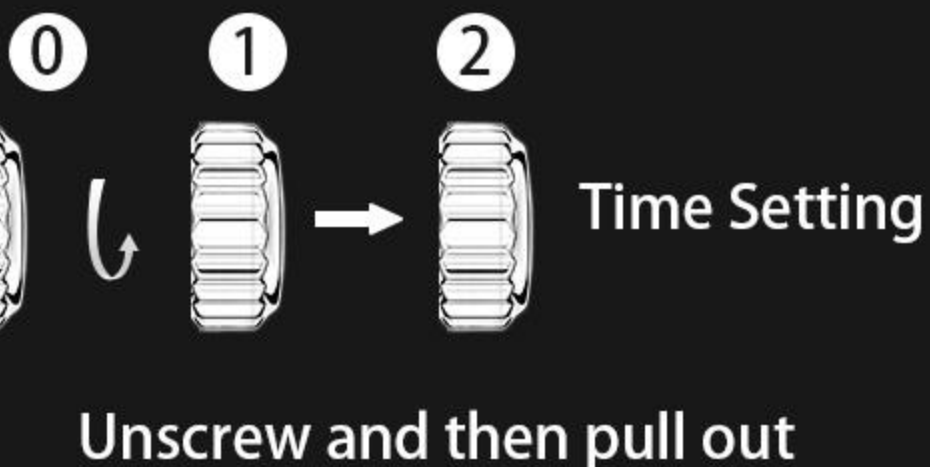

After using, carefully screw the crown back down against the case to guarantee the waterproofness. Return the crown to position 1, then apply gentle pressure while tightening. Finally, move it down onto the casing in a clockwise direction. Please noted that the crown should never be unscrewed underwater.





Week Setting

Unscrew and then press the button




Date Setting

# EASYLINK COMFORT EXTENSION LINK

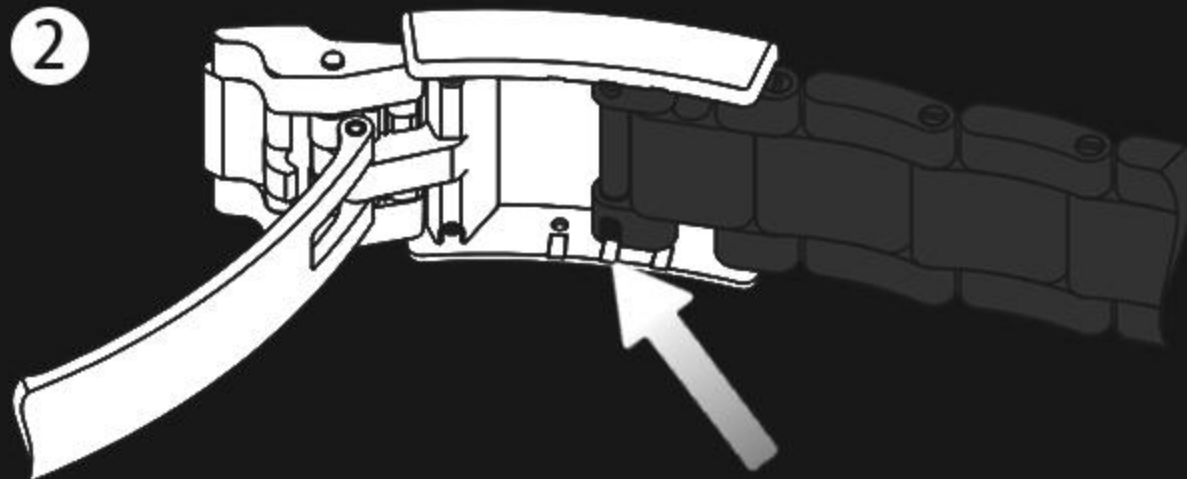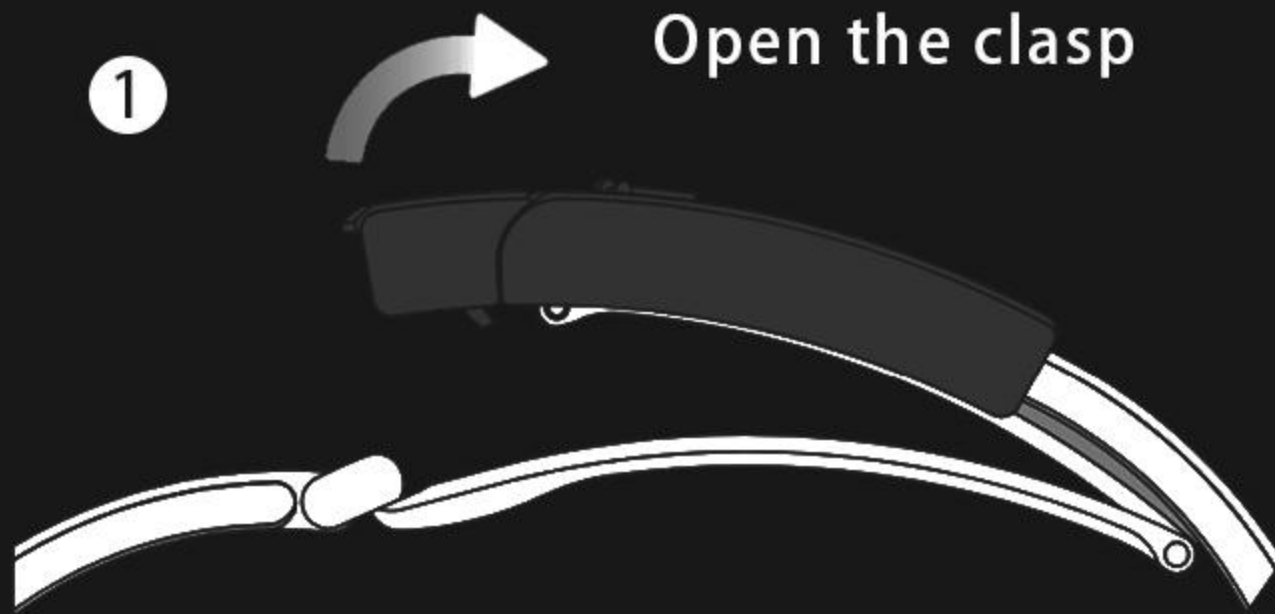

To ensure comfort, WISHDOIT has specially designed a fine-tuned buckle system. It can be divided into 5 gear adjustment. Each gear is 3 mm, and can stretch or shorten the strap outward about 15 mm.

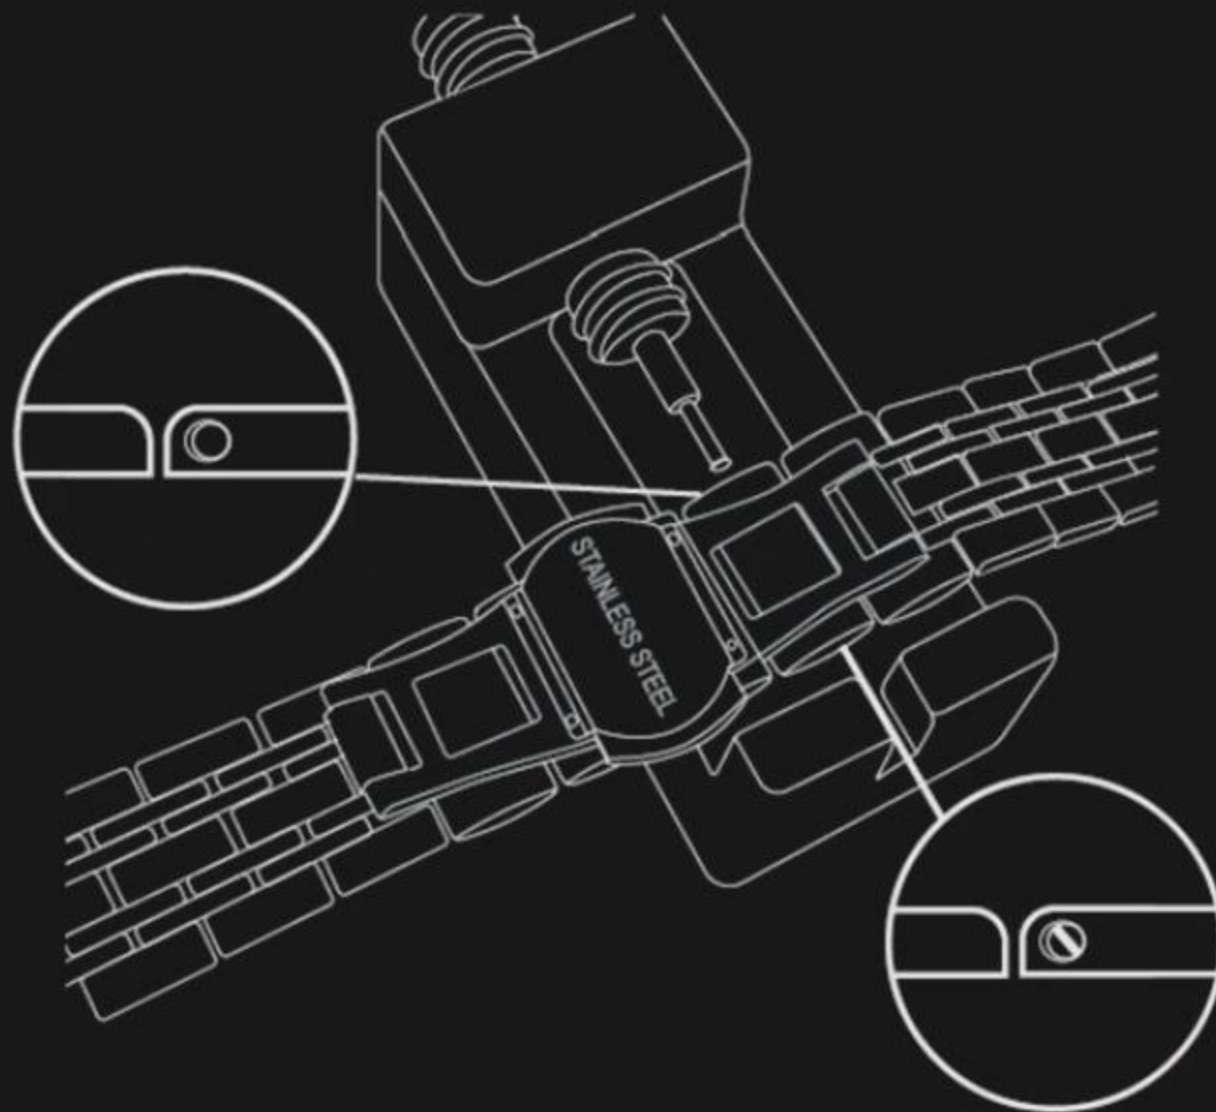

1. Observe the holes on both sides of the watchstrap. Point the adjustment tool pin into the holes that are deeper and do not have any straight line markings.
2. Make sure the watchstrap is laid flat on the adjustment tool platform.
3. Rotate the tool's knob to push the needle inside the strap out.
4. Remove excess parts as needed.
5. Relink the watchstrap by putting back the needle and pushing it in from the side it came out of with the adjustment tool.