


SPC-S-3x65W

Portable Solar Panel (SPC Series)

HB21

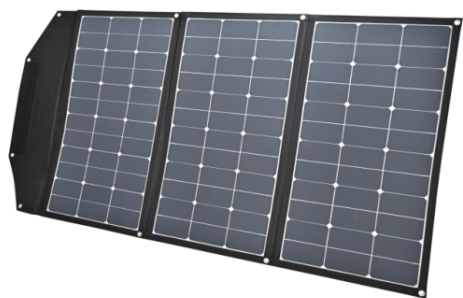

— Product details —

ELECTRICAL CHARACTERISTICS

| | |
|---------------------------------|-------------|
| Maximum power(Pmax) | 195W |
| Open-circuit voltage(Voc) | 26.2 |
| Voltage at Pmax(Vmp) | 22.3 |
| Short-circuit current(Isc) | 9.26 |
| Current at Pmax(Imp) | 8.75 |
| Cells Efficiency(%) | 24.40% |
| The maximum system voltage | 100VDC(IEC) |
| Power temperature coefficient | -0.43%/°C |
| Voltage temperature coefficient | -0.34%/°C |
| Current temperature coefficient | 0.05%/°C |
| Output power tolerance | ±3% |
| Operating Temperature | -10~60°C |

SPECIFICATIONS

| | |
|------------------|--|
| Solar cell brand | SUNPOWER Maxeon Gen III |
| Unfold size | 1545*820*4mm |
| Folded size | 820*440*20mm |
| Weight | 7.34KG |
| Waterproof level | IP X3 water resistant(2*Bypass diodes) |
| Warranty | 1 year and service life 5 years |

MODULE DIAGRAM

