



BUG-BEAM™ INSTALLATION

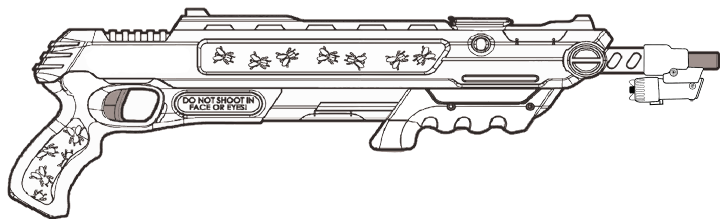

Tools You Will Need:


#2 Phillips Screwdriver - Aluminum Foil & Tape - Allen Wrench (In Package)

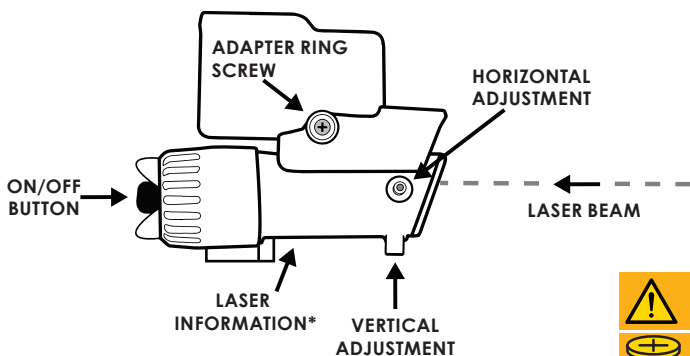


*Combined Explanatory, Hazard Warning, Certification, & Manufactures Identification Label

INSTALLATION


- 1 Using #2 Phillips head screwdriver loosen out adapter screw half inch.



- 2 Slide laser out from adapter ring.




- 3 Slip adapter ring on BUG-A-SALT barrel. Slide laser back into the adapter ring. Tighten adapter ring screw snugly. If loose, BUG-BEAM will wobble.



CALIBRATION


- 1 Create a target by marking a sheet of foil with fly sized X's. Permanent marker works best. Tape to wall or box.



- 2 Place yourself so gun barrel is 68cm from foil target. This is the ideal distance for effectiveness of salt spray pattern.



- 3 Aim laser, shoot target, and adjust BUG-BEAM accordingly with allen wrench.



SEE INSTALLATION VIDEO AT:

NZ: www.bugasalt.co.nz/bugbeam
SA: www.bugasalt.co.za/bugbeam

AU: www.bugasalt.com.au/bugbeam
UK: www.bugasalt.co.uk/bugbeam