A.S.HELSINGÖ

Handle Mounting Instructions / Bagel Mini

Content




Mounting

It's a matter of taste. You can mount the handle where you think it looks best.

We like to place them like this:

- 40 mm from the top of the door
- 40 mm from the side of the door
- 1. Mask the area where you want to install the handles using tape, both the front and back side of the door.
- 2. Mark the position of the drill holes using a drilling template.
- 3. Drill the holes for the screws from the front side of the door using a 5 mm drill. Do not to apply too much pressure on the drill. This can cause damage to the door when the drill breaks through the surface.
- 4. Remove the tape and install the handle carefully with the screw.

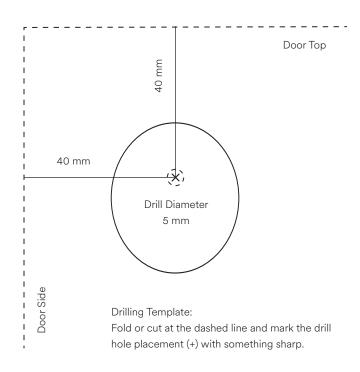

Care & Cleaning

We want our materials to age naturally and beautifully. For this reason, we have left all our metal handles untreated, and they develop a patina over time. You can clean brass and copper handles with a suitable metal polish.