




NEW YORK BLACKBOARD
HANDCRAFTED IN THE USA SINCE 1944

INSTRUCTIONS FOR ASSEMBLY REVOLVING BOARDS

1. Refer to picture below for end result.
2. First attach chalktray to the two uprights, using long bolts through third hole from top of upright, and making sure counter sunk holes are facing out.
3. Using short bolts, attach short brackets at a 45° angle from chalktray uprights.
4. Attach board to stand by threading brass pin through top hole of upright into brass fitting in side of frame.
5. Insert silver stay pin through upright into frame directly below brass revolving pin.
6. **REMINDER:** Loosen brass pin before revolving board, and tighten for use.
7. For **BEST RESULTS** on your new Porcelain Enamel Steel Chalkboard and Lastoplate Composition Chalkboard, use **HYGIEIA CHALK**. For markerboards, use **MOD-RITE DRY ERASE MARKERS**.

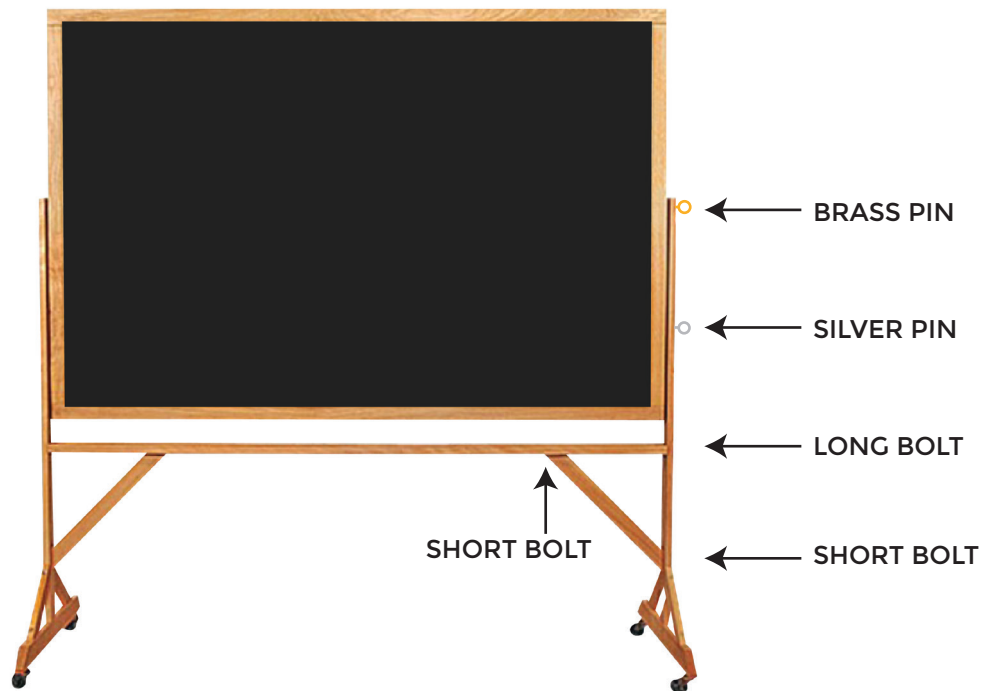

- HARDWARE:** 2 - 1/4" X 3" MACHINE SCREWS (LONG BOLTS)
4 - 1/4" X 2 1/2" MACHINE SCREWS (SHORT BOLTS)
6 - HEX NUTS
2 - BRASS PINS
2 - SILVER STAY PINS