



LNB

C-BAND EXT REF

3000XI

SPECIFICATIONS

Noise Temperature	25K typ., 30K max. at room temp. @ CF
L.O. Stability	Phase Locked to External Reference
Phase Noise (SSB) max.	Depends on External Reference
Input VSWR	2.5 : 1 max.
Output VSWR	2.5 : 1 max.
Gain	65 dB typ., 55 dB min., 70 dB max.
Gain Flatness (over full band)	≤ 4 dB p-p
Output P1dB	+ 3 dBm min.




DC Power	+ 12V to + 24V DC
Current	250 mA max.
Input (waterproof)	CPR 229G waveguide grooved
Output (waterproof)	F-Connector (75 Ohm) N-Connector (50 Ohm)
Dimensions (L x W x H)	180 mm x 100 mm x 70 mm (7.1 x 4.0 x 2.8 in)
Weight	575 g (20.28 oz)
Operating Temperature	- 40 to + 60°C
Storage Temperature	- 40 to + 80°C
External Ref Freq	10 MHz (sine-wave), -10 to 0 dBm

FREQUENCY BANDS

Frequency Band (GHz)	4.5 - 4.8
L.O. Frequency (GHz)	5.76
IF Frequency (MHz)	960 - 1260

HOW TO ORDER

3025XIN

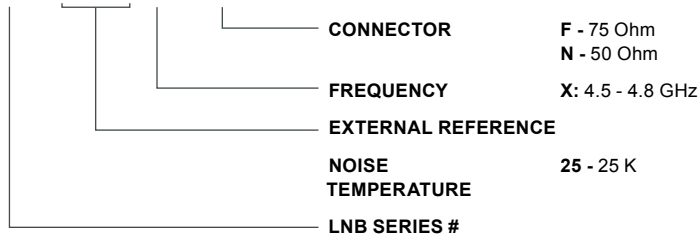

MECHANICAL DIAGRAM

