



RUST BUSTER

F R A M E W O R K S

RB8623L & RB8623R

2000-2006 Toyota Tundra
Leaf Spring Frame Section



REQUIRED TOOLS

Jack Stands or Lift
Mig Welder
Paint/Primer
Locking Pliers
Hand Grinder
Cutting Wheel or Torch
Welding Gloves
Welding Hood/Shield
Ear & Eye Protection
Sockets & Ratchet
Fire Extinguisher

KIT CONTAINS

Leaf Spring Frame Section
M10x1.5mm Flanged Hex Screw
M10x1.5mm Flanged Locknut

QTY

1
4
4



**RUST
BUSTER**
F R A M E W O R K S

RB8623L & RB8623R

2000-2006 Toyota Tundra
Leaf Spring Frame Section

1) PREPARING YOUR VEHICLE

Begin by disconnecting your battery prior to starting your installation.

Inspect your vehicle for leaking fuel lines, fuel tank and engine components. If you have fuel leaks repair all leaks prior to starting your installation. If your fuel tank is near your welding area **remove your tank prior to welding.**

Remove all combustible items above the work area such as seats, carpets, padding, etc.

Keep all flammable materials away from the vehicle work area.

2) PREPARING YOUR WORKSTATION

Keep a fire extinguisher close by in the case of fire and make sure you always have a designated "Fire Watch" to assist during the cutting or welding phases.

Abide by all apprenticed welding safety standards and practices.

Always use appropriate welding eye protection, ear protection, and work and fire safety gloves during the installation and within the work area.



WARNING!

If you are unsure on how to perform the installation or how to operate any of the required tools listed above, it is **HIGHLY** advised that you enlist the work of a certified welder/installer.

Failure to follow proper safety precautions and instructions may result in serious injury. **The user assumes all liability when installing the product.**



RUST BUSTER

F R A M E W O R K S

RB8623L & RB8623R

2000-2006 Toyota Tundra
Leaf Spring Frame Section

3) PREPARING FOR YOUR INSTALL


Remove your vehicle's bed.





Hold the part up to the frame and take note of its coverage. Mark out your cleaning and grinding area.

4) CUT

Begin removing the rivets retaining the leaf spring hanger, and push it out of the way. Begin cutting away the bump stop and body mount bracket. **Note: We sell the body mount bracket separately. If you do not wish to replace the factory mount, our part features a perforated plate that allows the section to go around the mount.**

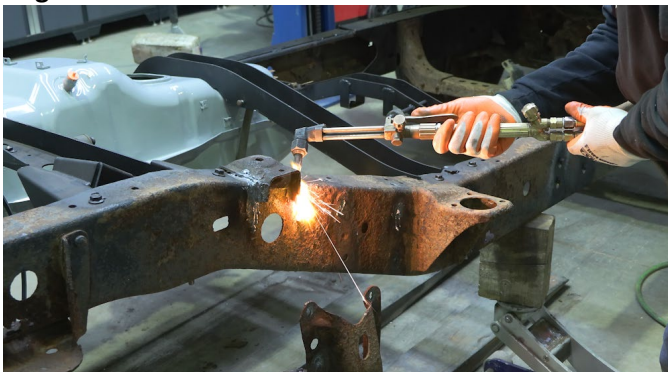

Grind away any remaining rust and debris revealing bare metal. Coat the part and work area with a weld-through primer to help prevent against further rust development.

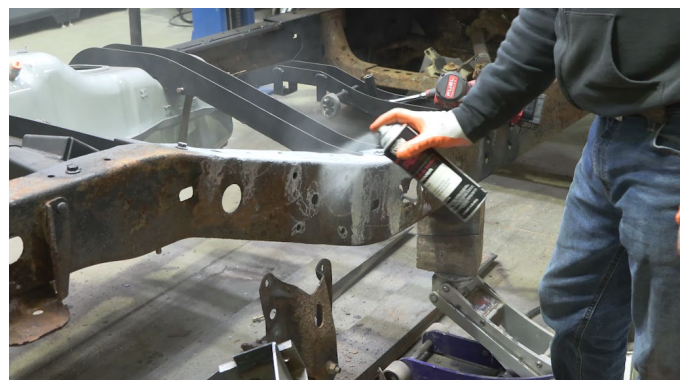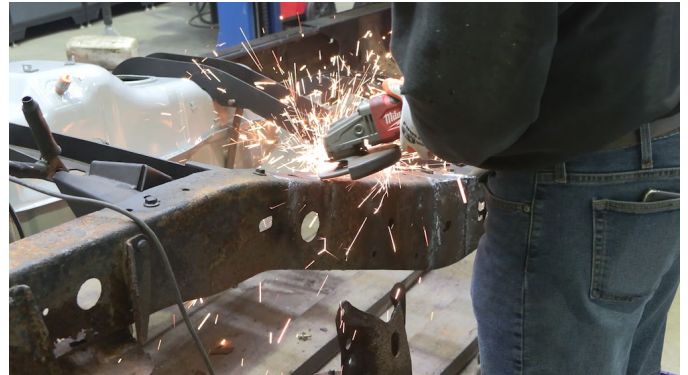



RUST BUSTER

F R A M E W O R K S

RB8623L & RB8623R

2000-2006 Toyota Tundra
Leaf Spring Frame Section

Push the part onto the frame while using the frame holes to help with alignment.



5) **WELD**

Remove any potential fire hazards from the work area. C-Clamp and Tac weld the part to the frame. Following proper welding procedures, begin welding the part. 100% weld around all edges.



Reattach your hanger and body mount bracket.