

Packaging - Specification

RECOBULK


SCHÜTZ

Transportcontainer RECOBULK 1000 ltr.
RMX1000 Std Nat/150B TP 2"Vent
Bfly 50 00 Met 3PCA/Steel frame
1-Pit LG/TI

SCHÜTZ Australia Pty Ltd.
Industrial Packaging
PO Box 38
SOUTH FREMANTLE WA 6162

Article-No. 4035437

Date Aug 13, 2019
Page 1 / 3

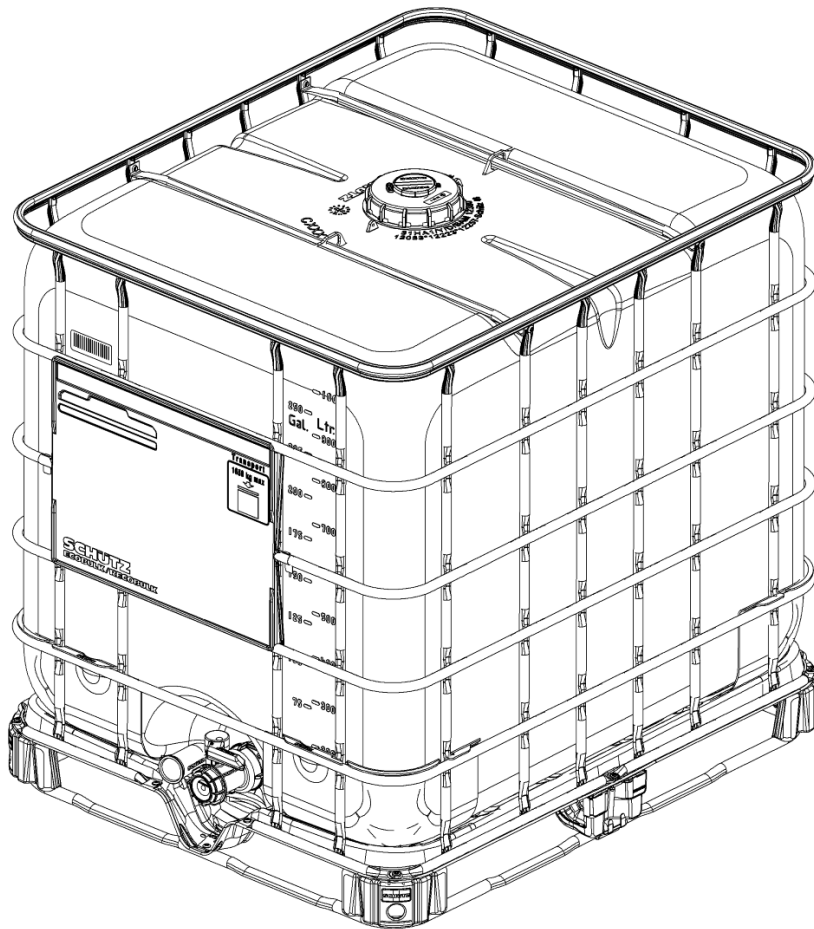

This picture is for illustration purpose only and does not necessarily correspond to the specified product.

Weights and measures

Nominal Capacity	1.000 l	275 gal US
Brimful Capacity	1.060 l	280 gal US
Length	1.200 mm	47,24 in
Width	1.000 mm	39,37 in
Height with pallet	1.160 mm	45,67 in
Total weight approx.	51,5 kg	113,5 lbs US

Pallet

Pallet type	Steel-framepallet, zined
Opening height	min. 90mm, 4-way entry

Packaging - Specification

RECOBULK

SCHÜTZ

Transportcontainer RECOBULK 1000 ltr.
RMX1000 Std Nat/150B TP 2"Vent
Bfly 50 00 Met 3PCA/Steel frame
1-Plt LG/TI


SCHÜTZ Australia Pty Ltd.
Industrial Packaging
PO Box 38
SOUTH FREMANTLE WA 6162

Article-No. 4035437

Date Aug 13, 2019
Page 3 / 3

Outlet nozzle

PE-HD

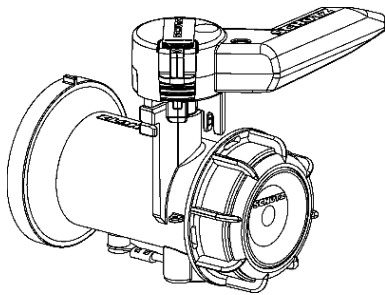

Features

Reko specialty

All parts which come into contact with the filling product are replaced by new original SCHÜTZ parts: Inner tank, screw cap, valve and label plate (for SCHÜTZ-Reko). The outer case (grid, bottom group and pallet) may show signs from the prior use!

Heavy metals

Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100 ppm

Delivery

Ready for filling. The customer or filler is responsible for testing the material compability of the filling material with the packaging

User information:

By implementing and continually improving extensive preventive programmes, SCHÜTZ strives towards minimising the potential contamination risk for filling material in line with the current state of the art and in accordance with recognised and applicable quality and system standards.

In industrial manufacturing, however, the possibility of particles arising cannot be fundamentally and entirely eliminated. Specifically for plastic and steel packaging, unavoidable friction during opening and closing as well as static charging of the packaging contribute to the development of particles and/or the possibility of particles being attracted. Such particles can then also invariably penetrate the packaging interior.

With the goal of minimising the risk of particle formation and transmission into packaging, users are recommended – particularly during further processing – to keep packaging closed wherever possible and to keep the number of opening and closing procedures as low as possible.

In the case of sensitive filling materials or filling material applications (e.g. for food/pharmaceutical products, paint or electro-chemicals), it is also recommended that the filling material is filtered on removal or prior to further processing.

SCHÜTZ reserves the right to change the construction, technology, design and material of the product or individual components without notice. The dimensions and weights given here are approximate and can vary according to the configuration of the individual components. For other product details and operating information concerning the correct handling of our packaging, please consult our Handling Guide.