

Qty. Description

1 GT-H-80 PN16 G1 V



Note! Product picture may differ from actual product

Product No.: [96528363](#)

Liquid max temp:

Grundfos GT-H-80 PN16 G1 V is a Diaphragm pressure tank, with a capacity of 80.0 l and Vertical installation. The tanks are approved for drinking water. The GT-H-80 PN16 G1 V is designed for a maximum operation pressure of 16 bar and a maximum liquid temperature of 90 °C.

Product name:

The tank is a steel pressure tank with a non-toxic butyl rubber diaphragm with a precision-moulded polypropylene liner for superior air and water separation.

The diaphragm is a chlorine-resistant 100 % butyl diaphragm with a precision-moulded copolymer polypropylene liner for superior air and water separation.

The tank has a FlowThru connection, which constantly flushes the tank while the pump is running.

This ensures that the water in the tank remains fresh and eliminates the risk of stagnant water during normal system operation.

The diaphragm is a chlorine-resistant 100 % butyl diaphragm with a precision-moulded copolymer polypropylene liner for superior air and water separation.

The tank has a FlowThru connection, which constantly flushes the tank while the pump is running.

This ensures that the water in the tank remains fresh and eliminates the risk of stagnant water during normal system operation.

The tanks have a non-replaceable diaphragm that is pre-charged with nitrogen (1.5 bar).

The tanks have a non-toxic butyl rubber diaphragm, dividing the tank chamber into two compartments.

The upper compartment contains compressed nitrogen.

The lower compartment has a liner of polypropylene (PP) and is filled with water from the pump.

A pressure tank ensures controlled pressure in the water supply and thereby limits the switching frequency of the pump in case of low water consumption or leakage loss.

The result is increased comfort in your installation by limiting the start/stop frequency of your pump, and it increases system comfort by compensating for pressure drops when a tap is opened, while reducing problems with water hammer in the pipework.

Liquid:

Maximum liquid temperature: 90 °C

Technical:



Company name:

Created by:

Phone:


Date:

22/04/2021

Qty.	Description
------	-------------

	Membrane type: Diaphragm
	Materials:
	Basic: Carbon steel/polypropylene (PP)
	Installation:
	Maximum operating pressure: 16 bar
	Type of connection: G
	Size of connection: 1 inch
	Size: 80.0
	Others:
	Net weight: 19.6 kg
	Gross weight: 21.3 kg
	Applicat. typ: Standard
	Country of origin: TW
	Custom tariff no.: 7310100008

Description	Value
<b>General information:</b>	
Product name:	GT-H-80 PN16 G1 V
Product No:	96528363
EAN number:	5700397133996
Price:	
<b>Technical:</b>	
Membrane type:	Diaphragm
<b>Materials:</b>	
Basic:	Carbon steel/polypropylene (PP)
<b>Installation:</b>	
Maximum operating pressure:	16 bar
Pre-pressure:	4 bar
Type of connection:	G
Size of connection:	1 inch
Installation:	Vertical
Size:	80.0
<b>Liquid:</b>	
Maximum liquid temperature:	90 °C
<b>Others:</b>	
Net weight:	19.6 kg
Gross weight:	21.3 kg
Applicat. typ:	Standard
Country of origin:	TW
Custom tariff no.:	7310100008

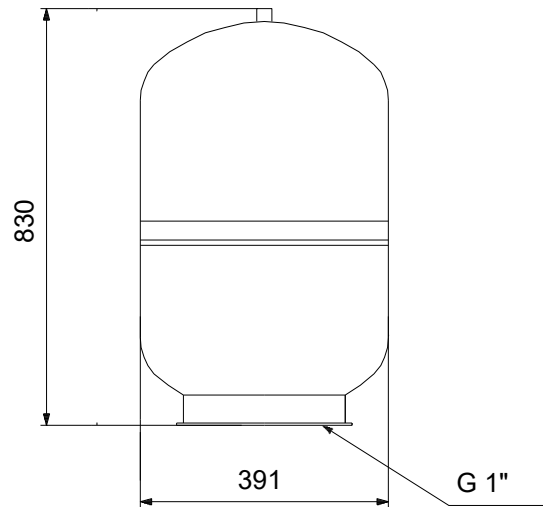



Company name:

Created by:

Phone:

Date:

22/04/2021

---

**Order Data:**

Product name: GT-H-80 PN16 G1 V

Amount: 1

Product No: 96528363

Price:

Total: Price on request

---