

# Sediment Spun Polypropylene - Standard Diameter

The Melt Blown Sediment Removal Filter combines innovative Graded Depth Filter Technology and High Sediment Loading capabilities while still remaining cost effective with proven excellent filtration. Melt Blown Filters are ideal for residential and light commercial water filtration where 10, 20, 30 & 40 inch filter housings are used. The Melt Blown Filters are a competitively priced Double Open End cartridge without compromising the quality.

## Features and Benefits

- Price Competitive
- Graded Density for High Sediment Loading
- Excellent Filtering Performance
- Fewer Cartridge Changes, which translates into Money Saved
- Pure Polypropylene Construction
- Individually Wrapped and Sealed

## Typical Applications

- Single Tap
- Whole House
- Commercial
- Light Industrial
- RO Pre-treatment
- Sea Water

## General Specifications

- Micron Ratings (Nominal): 1, 5, 10 & 20
- Lengths: 250mm (9<sup>7</sup>/<sub>8</sub>" ) 508mm (20")  
762mm (30") 1016mm (40")
- Outside Diameter: 64mm (2<sup>1</sup>/<sub>2</sub>" )
- Inside Diameter: 25mm (1")
- Temperature Ranges: 0.5°C - 52°C  
(33°F - 125°F)


### **NOTE:**

Recommended cartridge change is at a maximum increased pressure differential of:

69 kPa (10 psi)

## Flow Performance

\*Based on 10" length filter in clean water

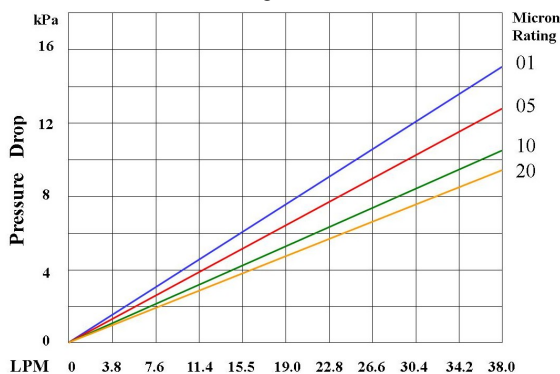

### **Warning:**

For drinking water applications, do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection.

## Series: WCMBL



**MBL Sediment High Efficiency**

### Model No.

	10"	20"	30"	40"
WCMBL10S01	WCMBL20S01	WCMBL30S01	WCMBL40S01	
WCMBL10S05	WCMBL20S05	WCMBL30S05	WCMBL40S05	
WCMBL10S10	WCMBL20S10	WCMBL30S10	WCMBL40S10	
WCMBL10S20	WCMBL20S20	WCMBL30S20	WCMBL40S20	

