

Data sheet


valid from: 11/12/19



Plain End Pipe - 20 ft lengths

- Refer to Industrial PLUS for sizes 1/8", 1/4", 3/8", 3-1/2", 5", 14"-24"
- Max Water Pressure at 73°F (22.7°C) with solvent-cemented joints
- Meets NSF[®]-pw-G
- Meets CAN/CSA B137.3 Requirements
- Non - CSA Approved

Max Water Pressure at 73°F (22.7°C) with solvent-cemented joints

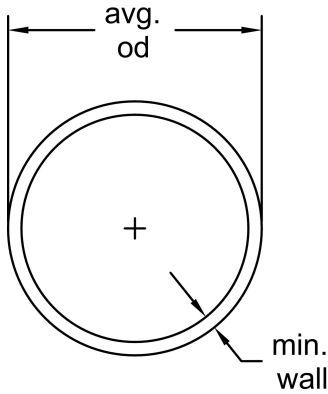

Inch (inch)	P/L	Code	Lift Qty. (20ft Lgths) (ft)	Average O.D. (inch)	Min. Wall (inch)	Wt/Ft (lbs/ft)	Max Water Pressure (psi)
1/2	H18	8008005ANC	5700	0.840	0.147	0.202	850
3/4	H18	8008007ANC	5260	1.050	0.154	0.273	690
1	H18	8008010ANC	4280	1.315	0.179	0.402	630
1 1/4	H18	8008012ANC	2360	1.660	0.191	0.554	520
1 1/2	H18	8008015ANC	2060	1.900	0.200	0.673	470
2	H18	8008020ANC	1660	2.375	0.218	0.932	400
2 1/2	H18	8008025ANC	1080	2.875	0.276	1.419	420
3	H18	8008030ANC	840	3.500	0.300	1.903	370
4	H18	8008040ANC	520	4.500	0.337	2.782	320
6	H18	8008060ANC	340	6.625	0.432	5.313	280

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>