


Thank you for purchasing from Southeast Sailboats. Hopefully these rigging instructions are self explanatory. If you have any problems please contact us at sales@southeast sailboats.co.uk

The system comprises two parts:

- Part 1 - Primary line with block and secondary control line
- Part 2 - Lower block assembly with strop


This version attaches the primary at the top of the kicker assembly.

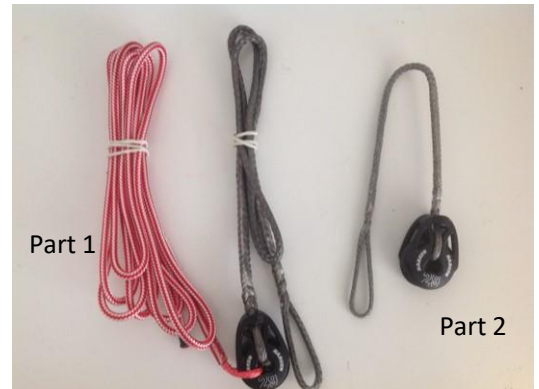

Step by Step Rigging Instructions:

Step 1 – Start by passing the loop on the end of the primary (Part 1) through the sail cringle.

Step 2 – Pull the loop on the end of the primary line down to the level of the kicker and attach to the caribiner or directly to the top of the kicker assembly

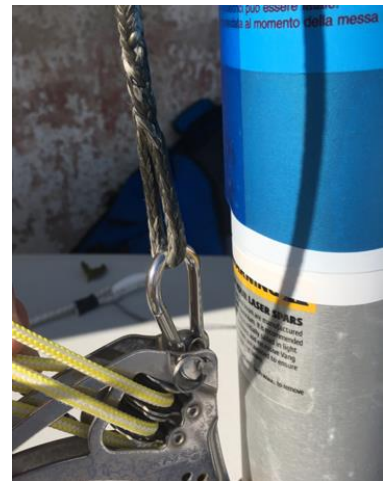

Step 3 – Pass the lower block assembly strop around the mast under the kicker tang and thread the block through the loop.

Step 4 – Thread the secondary line through the lower block, and back up through the top block. When finished the lower block should be positioned as in the photo.

