

ALPHA UXT PEARL SMART TOILET 1.28 GPF

FEATURES

- Automatic, Motorized Seat and Lid
- Automatic Flushing 1.28gpf
- Chair Height ADA Compliant (17.4" seat height)
- 2 Stage Flushing Action
- Bowl Pre-Rinse
- Multi Function Foot Sensor
- Rear Wash
- Front Feminine Wash
- Wireless Remote Control w/ Wall Mount
- Nozzle Oscillation
- Warm Air Dryer w/ Adjustable Temp
- Heated Seat w/ Adjustable Temp
- 2 Programmable User Presets
- Photocatalyst Deodorizer
- Pure Breeze Bowl Sterilization
- Backlit Side Control Knob
- Seat Sensor
- Pulse Spray
- Adjustable Nozzle Position
- Adjustable Water Temp
- Adjustable Spray Pressure
- LED Nightlight
- Power Saving Mode
- Stainless Steel Wash Nozzle
- Self-Cleaning Nozzle
- 1 Touch Programmable Auto Wash & Dry
- 1 Touch Easy Wash (Full Pressure Rear Wash w/ Oscillation)

PRODUCT SPECIFICATION

The Alpha UXT Pearl is a next generation smart toilet from Alpha Bidet that blends the latest in luxury bidet features into a high performing tankless toilet with modern design cues. Its upper half is ultra slim with a glossy finish that's both attractive and easy to clean. Its lower half is a fully skirted, vitreous china toilet that uses a standard 12" rough-in distance and installs over a standard toilet flange for straightforward installation. It's powered by an energy efficient, tankless water heating system that provides endless, on demand warm water with consistent temperatures. It includes a warm air dryer, deodorizer, bowl sanitizer, and a plethora of customizable, automatic functions.

ALPHA BIDET



CODES/STANDARDS

The Alpha UXT Pearl has gone through rigorous independent laboratory testing and received quality certifications for both commercial and residential applications.

- Meets and exceeds: ASME A112.4.2-2015/CSA B45.16-15 (R2020), UL 1431, 3rd Edition, CSA C22.2 No. 68-18, CSA C22.2 No. 64-19
- Certifications: IAPMO (cUPC), CEC, WaterSense
- Code Compliance: Uniform Plumbing Code (UPC), National Plumbing Code of Canada



These dimensions and specifications are subject to change without notice




ALPHA UXT PEARL SMART TOILET 1.28 GPF

SPECIFICATIONS

Model	UX-T	
Main Unit	Rated voltage	110V-120V, 50/60Hz
	Rated power	785W
	Water proof	IPX4
	Power cord length	About 7ft
Toilet	Flush volume	1.28 gpf
	Flushing mode	Siphonic jet
	Rough-in	12"
	Outlet outside diameter	4"
	Drainage method	S-trap
	Water pressure range	0.18 MPa (dynamic pressure, flow rate of 5.81+ gal/min or 22.0+ L/min) - 0.8 MPa (static pressure)
Cleaning device	Heating mode	On demand
	Heating power	120V/1400W
	Water temperature	6-level adjustment
	Water volume	5-level adjustment
	Cleaning mode	Rear wash / Oscillating Front wash / Oscillating
	Nozzle position	5-level adjustment
	Water pressure protector	Pressure maintaining device, Automatic pressure relief device
	Anti-backflow	Anti-siphon device, air gap anti-backflow
	Safety device	Thermal fuse, Water temperature sensor, Ground protection, Thermostat, Over temperature protection, Leakage protection plug
Drying device	Warm air volume	Over 0.2m ³ /min
	Warm air temperature	6-level adjustment
	Heating power	250W
	Safety device	Thermal fuse, Temperature sensor, Thermostat
Deodorizer	Deodorization method	Photocatalyst-free
Heated seat	Surface temperature	6-level adjustment
	Heating power	50W
	Burn protection	After 10 minutes of use, the seat temperature will automatically drop slowly to a low level
Convenience	Safety device	Seat sensor, Temperature sensor, Thermostat, Thermal fuse, Leakage protection plug
	Night light assembly	Intelligent, Always on, Always off
	User ID setting	To avoid interference when used by multiple users
	Automatic flushing	Automatic flushing after use
	Foot sensor flushing function	Foot sensor flushing
Convenience	Flushing during power failure	Battery backup (9V)
	Lid opening	Lid auto-open

INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- Please install the supplied 1/2" angle valve at the wall and use the supplied 7/8" - 1/2" braided hose to supply the toilet to ensure proper flushing performance.
- The supplied angle valve has an internal filter that will protect the toilet's components.
- Do not use your existing toilet's supply line to supply the UXT Pearl. Doing so will greatly reduce the performance of the product and shorten its lifespan.
- Draw drain outlet centerline on the floor, and install the angle valve at least 8" away at an appropriate height to clear the toilet skirt.

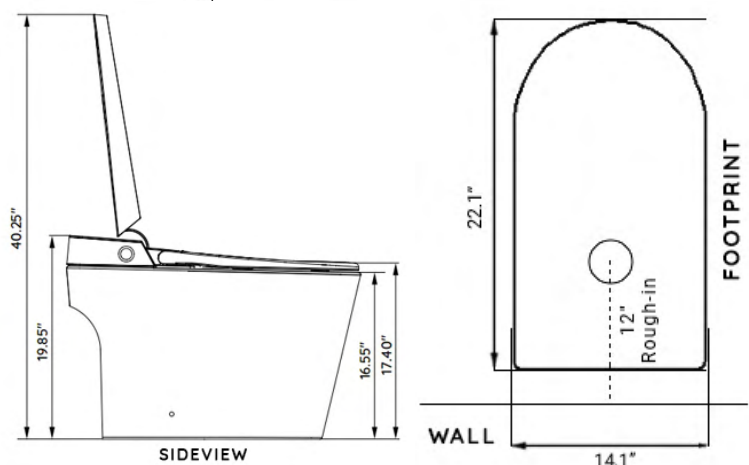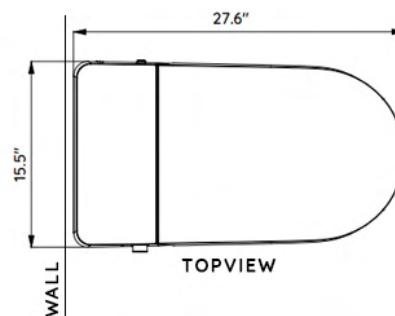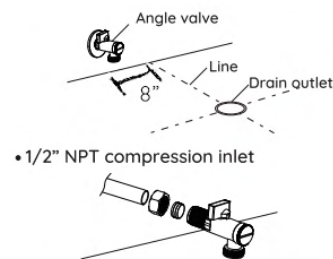

WARRANTY

Residential: 3 year full manufacturer's warranty that covers 100% of parts and labor costs from the date of purchase.

Commercial: 1 year full manufacturer's warranty that covers 100% of parts and labor costs from the date of purchase.