
Brondell®

Swash Thinline T22 Luxury Bidet Toilet Seat with Side Arm Control

Models: T22-EW, T22-RW

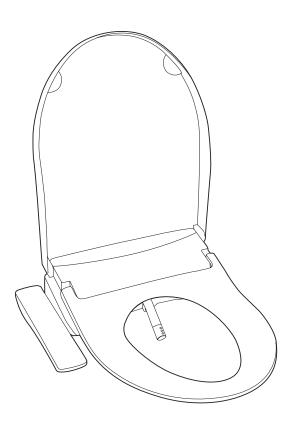

Features

Adjustable, 5-position stainless steel nozzle

Nozzle oscillation, gentle, and strong wash modes

Fully adjustable water pressure and temperature

Three-level heated seat and 5-level warm air dryer with temperature control

Ceramic water heater system

Activated carbon deodorizer

Gentle-close, sit-upon seat and lid

Multicolored LED nightlight

Side arm controls

On-demand, self-cleaning nozzle

3-year limited warranty provided by US-based customer service team

Technical Specifications

recnnical Specifications	
Power Voltage / Frequency	120 V / 60 Hz
Max Power Consumption	1470 W
Power Cord Length	47.24″ / 119.98 cm
Rated Power Source	120 V
Seat Weight Limit	397 lb / 180 kg
Lid Weight Limit	264 lb / 120 kg
Deodorizer Filter Type / Filter Life	Carbon / 6 months

Brondell®


Weight and Dimensions	
Dimensions (L x W x H)	Elongated: 20.7″ x 15″ x 3.9″ / 52.6 cm x 38.1 cm x 9.9 cm Round: 19.6″ x 15″ x 3.9″ / 49.8 cm x 38.1 cm x 9.9 cm
Seat Thickness	1" / 2.5 cm
Bidet Hose Length	23.6″ / 60 cm
Bidet Hose Connection Size	½" x ½"
T-Valve Connection Size	^γ ₈ " x ^γ ₈ " x ^γ ₂ "
Weight	Elongated: 9.1 lb / 4.1 kg Round: 9 lb / 4.1 kg

Warm Water Washing Device	
Supply Water Pressure	7.11 psi-106.7 psi / 0.05 MPa-0.74 MPa
Incoming Water Temperature	50°F-89.6°F / 10°C-32°C
Default Cycle Time	2 minutes
Water Pressure Control	5 levels
Water Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 98.6°F / 37°C; High - 104°F / 40°C
Max Heater Power Consumption	1400 W

Heated Seat and Air Dryer	
Seat Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 98.6°F / 37°C; High - 104°F / 40°C
Number of Dryer Settings	5 levels
Default Dryer Cycle Time	2 minutes

Required Measurements

- A. Center of bolt holes to front of toilet bowl Elongated: 17.7"-18.5" / 44.9 cm-47 cm Round: 16.9"-17.5" / 42.9 cm-44.5 cm
- B. Distance from center of bolt holes to toilet seat tank All models: Minimum 2" / 5.1 cm If the distance from the center of the bolt holes to the toilet tank is less than 2 inches, the Swash may extend slightly over the front edge of your toilet bowl.
- C. Distance between bolt holes All models: 5.3"-7.7" / 13.5 cm-19.5 cm
- D. Measure the distance from the front of the toilet tank to the front of the toilet bowl. If this measurement is less than 20 inches, the seat will extend over the front edge of the toilet. Consider purchasing a Round size to reduce the amount the seat extends over the front edge.





NOTE: The specifications listed above are subject to change without prior notice for reasons of improving the product performance. #22T22_0707



brondell.com