




1. This is the starting position.

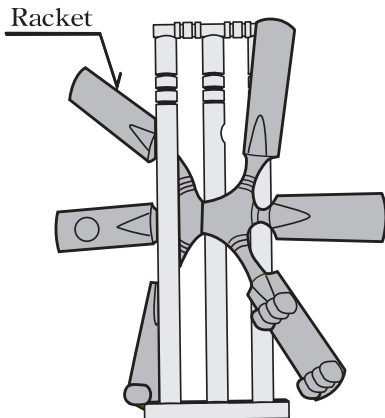


2. Firstly, turn the racket over to the position below.

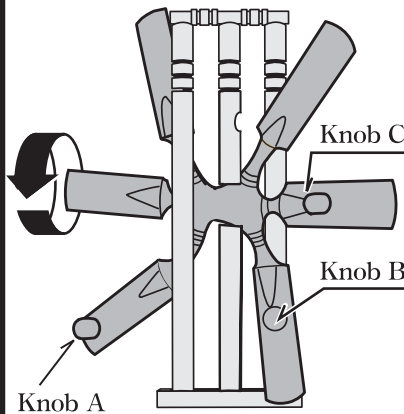


3. Pass the racket through the cutout in the middle stump so it is in the position below, then use the cutout to pass knob B to the left.

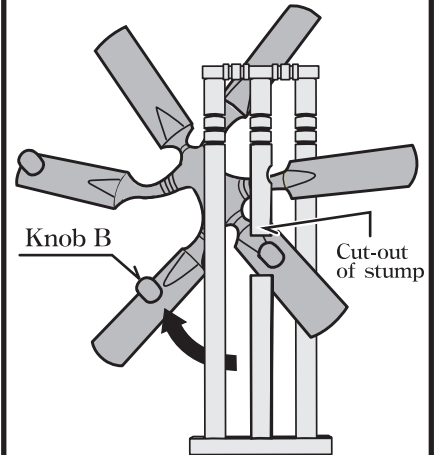


4. Then move knob C to the left in the same way.

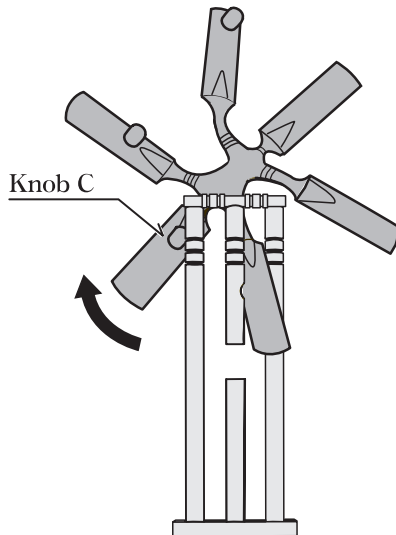


5. In this position, turn the racket over again resulting in the position in the diagram below.

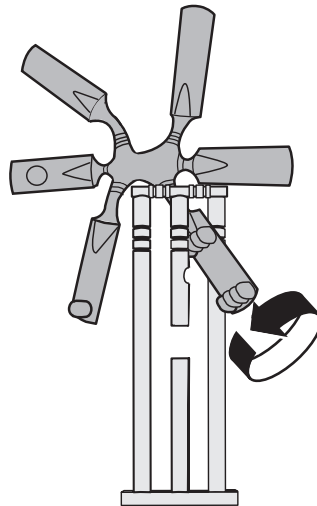

6. Move knob D through the cutout in the middle stump and to the right.

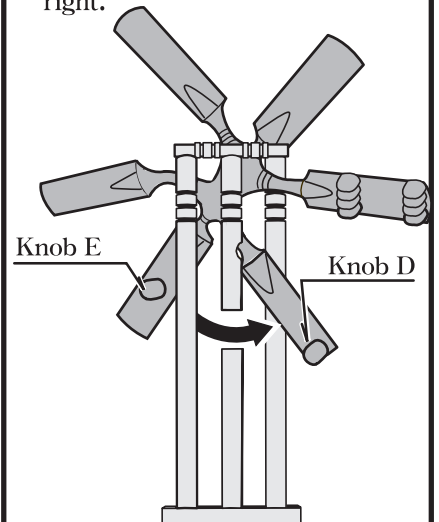

7. While sliding the racket down, pass it through to the left as shown below.

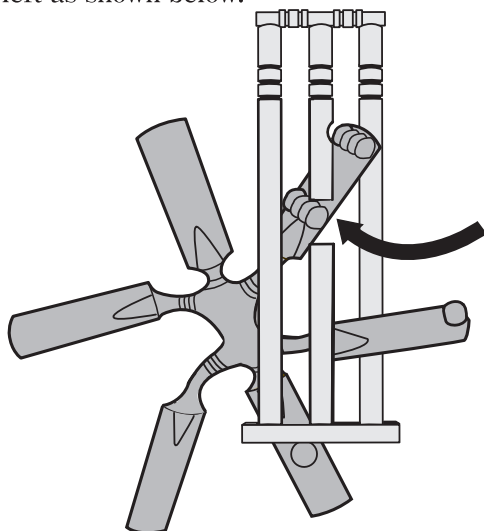

8. Finally, if you pass knob E and then knob D through the cutout in the middle stump, you can separate them.

