

LED UFO High Bay Light

Product Description

Eagle Star LED UFO styled LED High Bay Light Fixtures look like a UFO flying ship, which makes them more futuristic and full of the feeling of high-tech. These LED high bay fixtures come in four models, which can replace 250W to 1000W Metal Halide Lamp. Beam angle is 120°, which is ideal for warehouse, garage, workshop, gymnasium, parking place etc. The starting time is less than 0.5 s in -40°C.





- Voltage 100-277V AC
- Light Efficacy 140lm/w
- Lifespan above 50,000 hours
- Qualified with CE, RoHS, cETL, ETL, DLC
- Senses LED driver & PHILIPS LEDs
- 5 years warranty
- IP 65
- Die-casted aluminum housing is polyester powder coated to be rust and corrosion proof
- High efficiency, energy saving, eco-friendly
- Sealed fixture is dirt and bug free
- PIR and motion sensor available
- Ambient temperature from -40°C to 50°C

Product Parameters



Input Power	100W	150W	200W	240W
LED Chips	PHILIPS LEDs			
Initial Lumens	14,000lm	21,000lm	28,000lm	33,600lm
Efficacy	140lm/w	140lm/w	140lm/w	140lm/w
CRI	> 80Ra			
CCT	3000k/4000k/5000k/5700k			
Beam Angle	120°			
Input Voltage	100-277V AC 50Hz/60Hz			
Working Temperature	-40°C Up to 50°C (-40°F up to 122°F)			
Certification	CE, RoHS, cETL, ETL, DLC premium			
Warranty	5 years			
Replacement	250W MH	480W MH	750W MH	1000W MH
Carton/Pieces	1	1	1	1
G.W	3.1kg	3.2kg	4.6kg	4.7kg
Carton Size	33cm*33cm*18cm	33cm*33cm*18cm	38cm*38cm*18cm	38cm*38cm*18cm

Goods are shipped from CA NY TX Warehouses in the USA. Email: info@eaglestarled.com.
<https://eaglestarled.com/collections/led-ufo-high-bay-light>

Dimensions

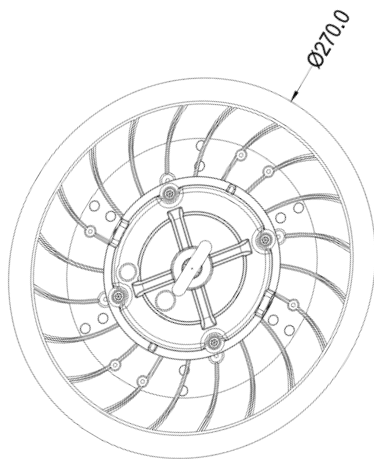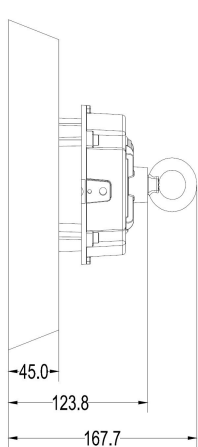


100W/150W

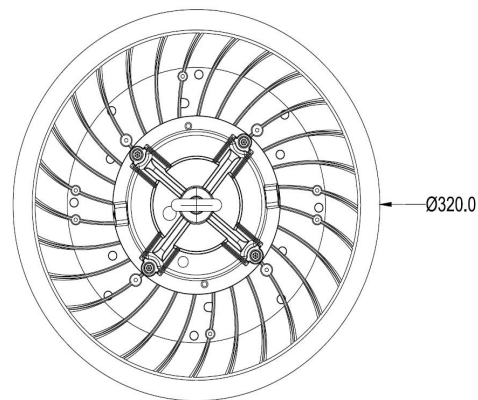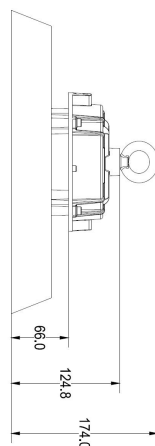

200W/240W


Photometrics



1.0m	4161.9, 3432.0 lx	304.61cm
2.0m	1040.5, 858.0 lx	609.22cm
3.0m	462.4, 381.3 lx	913.82cm
4.0m	260.1, 214.5 lx	1218.43cm
5.0m	166.5, 137.3 lx	1523.04cm
6.0m	115.6, 95.3 lx	1827.65cm
7.0m	84.9, 70.0 lx	2132.25cm
8.0m	65.0, 53.6 lx	2436.86cm

Max, Ave Beam angle of Cylind:113.41


100W



1.0m	6068.7, 5019.2 lx	300.73cm
2.0m	1517.2, 1254.8 lx	601.46cm
3.0m	674.3, 557.7 lx	902.19cm
4.0m	379.3, 313.7 lx	1202.93cm
5.0m	242.7, 200.8 lx	1503.66cm
6.0m	168.6, 139.4 lx	1804.39cm
7.0m	123.9, 102.4 lx	2105.12cm
8.0m	94.8, 78.4 lx	2405.85cm

Max, Ave Beam angle of Cylind:112.75


150W



1.0m	8468.0, 7013.4 lx	300.74cm
2.0m	2117.0, 1753.4 lx	601.47cm
3.0m	940.9, 779.3 lx	902.21cm
4.0m	529.3, 438.3 lx	1202.95cm
5.0m	338.7, 280.5 lx	1503.68cm
6.0m	235.2, 194.8 lx	1804.42cm
7.0m	172.8, 143.1 lx	2105.16cm
8.0m	132.3, 109.6 lx	2405.90cm

Max, Ave Beam angle of Cylind:112.75

200W



1.0m	8468.0, 7013.4 lx	300.74cm
2.0m	2117.0, 1753.4 lx	601.47cm
3.0m	940.9, 779.3 lx	902.21cm
4.0m	529.3, 438.3 lx	1202.95cm
5.0m	338.7, 280.5 lx	1503.68cm
6.0m	235.2, 194.8 lx	1804.42cm
7.0m	172.8, 143.1 lx	2105.16cm
8.0m	132.3, 109.6 lx	2405.90cm

Max, Ave Beam angle of Cylind:112.75

240W

Sonsen LED Driver
1-10V Dimming



Motion sensor



American design, high quality
aluminum die-casting shell
never fade cracking prevention



SMD LEDs High efficiency
Brighter luminance
longer lifespan

