
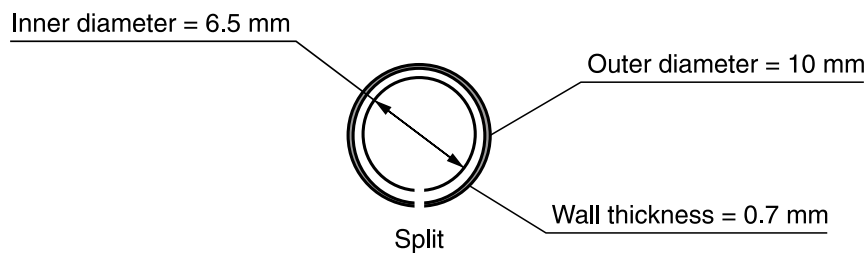



- ✓ High-Temperature, Spatter-Resistant cable and hose protection
- ✓ Suitable for casting, welding and industrial applications
- ✓ Pre-slit along length for retrofitting in field installations

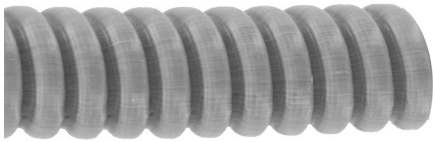

TECHNICAL DATA

Material	PTFE
Ambient temperature range	-50 ... +250°C
Bend radius	min. 2.5 cm

AVAILABLE TYPE

Part number	Part reference	Length	Weight
605-010-018	APT-0001-010	1,0 m	49 g
605-010-019	APT-0001-100	10,0 m	490 g
605-010-022	APT-0001-999	100,0 m	4900 g

Note: additional suffix can appear to indicate a revision version or a special version.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved.

Please check our website for updates.