
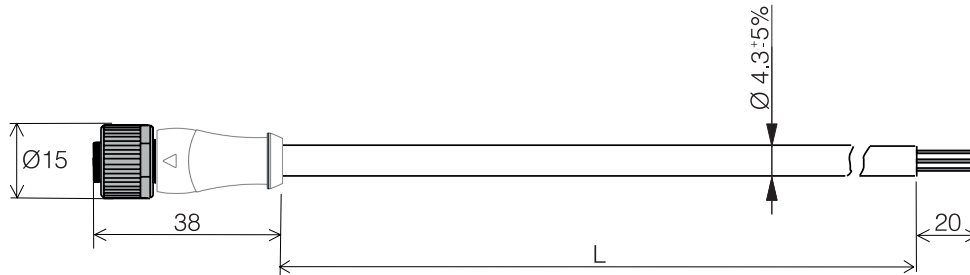


- ✓ PUR cable, suitable for welding environment
- ✓ Size S12 (M12 x 1 thread), straight
- ✓ 3 poles
- ✓ IP65 / IP66K / IP67



Tolerance cable length	0 m < L ≤ 0,5 m	+0,03 m
	0,5 m < L ≤ 1,0 m	+0,03 m
	1,0 m < L ≤ 3,0 m	+0,1 m
	3,0 m < L	±1,5%

TECHNICAL DATA*

Jacket material	spatter-resistant PUR	Insulation group	IEC 60664-1, category I
Connector material	Zinc die casting, matte nickel plated	Enclosure rating	IP65 / IP66K/ IP67 (inserted and tightened)
Rated voltage	max. 250 V AC/DC	Tightening torque	0,6 Nm
Rated current per contact	max. 4 A	Ambient temperature range (fixed)	-40°C...+80°C (90°C max 10 000h)
Rated surge voltage	2.5 kV	Ambient temperature range (mobile)	-25°C...+80°C (90°C max 10 000h)
Wire structure	3 x 0.34 mm ²		

* according to DIN EN 61076-2-101

AVAILABLE TYPE

Part number	Part reference	Length	Weight
605-002-360	S12-3FUG-020-NNWN	2,0 m	70 g
605-002-361	S12-3FUG-050-NNWN	5,0 m	160 g

Note: additional suffix can appear to indicate a revision version or a special version.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved. Please check our website for updates.