

# SAFETY LIGHT CURTAIN

## YBB-30□2-□□□□-G012



RESOLUTION 30 MM

TYPE 2 / PL c

### OUTSTANDING FEATURES

- Protective height: 150 mm ... 1827 mm
- Operating range: 0.25 ... 12 m
- Category 2, PL c according to EN/ISO 13849-1
- Type 2 according to IEC 61496-1/2
- Optically synchronized units
- Permanent autocontrol

### TECHNICAL DATA (at +23°C ±5°C, 24 VDC)

Resolution	30 mm
Beam axis interval	16 mm
Effective aperture angle	< ± 2.5° (when operating distance ≥ 3 m)
Operating range	0.25 ... 12 m
Housing size	42 mm x 48 mm x Ht
Total height (Ht)	see type-specific data (page 2)
Housing height (Hb)	see type-specific data (page 2)
Protective height (Hs)	see type-specific data (page 2)
Number of beams	see type-specific data (page 2)
Response time	see type-specific data (page 2)
Supply voltage	24 VDC ± 20%
Current consumption	see type-specific data (page 2)
Dissipated power	see type-specific data (page 2)
Polarity	2 PNP outputs
Output protection	short-circuit, overload protected
Output monitoring	cross-circuit monitored
Output current	max. 200 mA per output (at 50°C / 122°F)
Output voltage ON min.	-1.0 V of the operating voltage
Output voltage OFF max.	1.0 V
Output monitoring frequency	10 Hz
Leakage current when OFF state	< 1 mA
Maximum load inductance	100 mH
Sender wavelength	IR 850 nm
Safety level	Category 2, Type 2 (IEC 61496-1/2), PL c, SIL 1 (IEC 61508) pending (see also type-specific data on page 2)
Electrical protection class	III (IEC 61140)
Startup delay	< 0.5 s
Vibration resistance	10 to 55 Hz, 0.35 mm amplitude, 1 octave/min., 20 sweeps for each axis
Shock resistance	10 g during 16 ms, 1000 times for each axis
Light immunity	incandescent lamp: 3000 lx max. (light intensity on receiver surface); xenon flash tube: flash duration 1.2 ms max. with a frequency of 2 Hz max. (IEC 61496-2)
Ambient temperature range	0 ... +50°C (+32 ... +122°F)
Storage temperature range	-25 ... +70°C (-13 ... +158°F)
Air humidity	15 ... 95 % (non-condensing)
Enclosure rating	IP65 + IP67 (EN 60529/A1)
Housing material	aluminum profile, PMMA front screen
Material of upper and lower cover	PA + 30% fiberglass
Cable runs	100 m max. (at 10 nF capacitive load)
Weight	see type-specific data (page 2)
Reference standards: safety	IEC 61496-1, IEC 61496-2, EN 60204-1, EN 50178
environment	EN 60068-2-1,2,3,6,29
EMC	EN 61000-4-2,3,4,5,6,11
radio disturbance	EN 55011/A2

**TYPE-SPECIFIC DATA**


BEAM RESOLUTION: 30 MM

Part reference	Protective Height Hs [mm]	Housing Height Hb [mm]	Total Height Ht [mm]	Number of Beams	Current Consumption [mA max.]*	Response Time [ms]	MTTF <sup>a</sup> [years]	DC <sub>avg</sub>	Dissipated power [W max.]*	Weight [g]
YBB-30x2-0150-G012	150	221	251	9	20 (S)/50 (R)	14	78	91%	0.6 (S)/1.5 (R)	520
YBB-30x2-0250-G012	279	350	380	17	22 (S)/52 (R)	18	65	92%	0.7 (S)/1.5 (R)	805
YBB-30x2-0400-G012	408	479	509	25	23 (S)/54 (R)	22	55	93%	0.7 (S)/1.6 (R)	1090
YBB-30x2-0500-G012	537	608	638	33	24 (S)/55 (R)	26	48	94%	0.7 (S)/1.6 (R)	1370
YBB-30x2-0700-G012	666	737	767	41	25 (S)/55 (R)	30	42	94%	0.8 (S)/1.6 (R)	1660
YBB-30x2-0800-G012	795	866	896	49	25 (S)/56 (R)	34	38	95%	0.8 (S)/1.6 (R)	1945
YBB-30x2-0900-G012	924	995	1025	57	25 (S)/56 (R)	38	34	95%	0.8 (S)/1.6 (R)	2230
YBB-30x2-1000-G012	1053	1124	1154	65	25 (S)/56 (R)	42	32	95%	0.8 (S)/1.6 (R)	2515
YBB-30x2-1200-G012	1182	1253	1283	73	26 (S)/57 (R)	46	29	96%	0.8 (S)/1.7 (R)	2800
YBB-30x2-1300-G012	1311	1382	1412	81	26 (S)/57 (R)	50	27	96%	0.8 (S)/1.7 (R)	3085
YBB-30x2-1400-G012	1440	1511	1541	89	27 (S)/57 (R)	54	25	96%	0.8 (S)/1.7 (R)	3370
YBB-30x2-1600-G012	1569	1640	1670	97	27 (S)/57 (R)	58	23	96%	0.8 (S)/1.7 (R)	3655
YBB-30x2-1700-G012	1698	1769	1799	105	27 (S)/58 (R)	62	22	96%	0.8 (S)/1.7 (R)	3940
YBB-30x2-1800-G012	1827	1898	1928	113	27 (S)/58 (R)	66	21	97%	0.8 (S)/1.7 (R)	4225

x = S for sender / R for receiver / K for kit (sender + receiver)

\* Excl. load

**HOUSING SIZE**

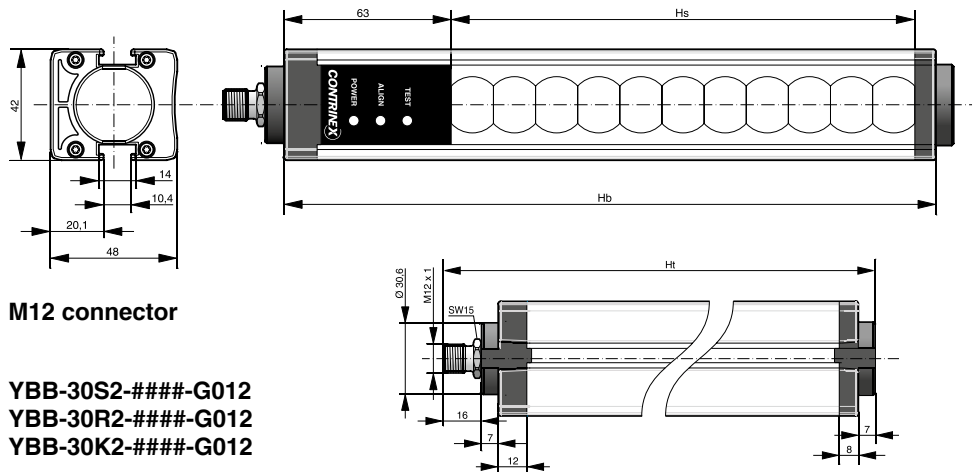

**M12 connector**


**YBB-30S2-####-G012**  
**YBB-30R2-####-G012**  
**YBB-30K2-####-G012**

**PART REFERENCE**

Output type	Sender	Receiver	Kit (Sender + Receiver)
PNP / Connector M12	YBB-30S2-0150-G012	YBB-30R2-0150-G012	YBB-30K2-0150-G012
PNP / Connector M12	YBB-30S2-0250-G012	YBB-30R2-0250-G012	YBB-30K2-0250-G012
PNP / Connector M12	YBB-30S2-0400-G012	YBB-30R2-0400-G012	YBB-30K2-0400-G012
PNP / Connector M12	YBB-30S2-0500-G012	YBB-30R2-0500-G012	YBB-30K2-0500-G012
PNP / Connector M12	YBB-30S2-0700-G012	YBB-30R2-0700-G012	YBB-30K2-0700-G012
PNP / Connector M12	YBB-30S2-0800-G012	YBB-30R2-0800-G012	YBB-30K2-0800-G012
PNP / Connector M12	YBB-30S2-0900-G012	YBB-30R2-0900-G012	YBB-30K2-0900-G012
PNP / Connector M12	YBB-30S2-1000-G012	YBB-30R2-1000-G012	YBB-30K2-1000-G012
PNP / Connector M12	YBB-30S2-1200-G012	YBB-30R2-1200-G012	YBB-30K2-1200-G012
PNP / Connector M12	YBB-30S2-1300-G012	YBB-30R2-1300-G012	YBB-30K2-1300-G012
PNP / Connector M12	YBB-30S2-1400-G012	YBB-30R2-1400-G012	YBB-30K2-1400-G012
PNP / Connector M12	YBB-30S2-1600-G012	YBB-30R2-1600-G012	YBB-30K2-1600-G012
PNP / Connector M12	YBB-30S2-1700-G012	YBB-30R2-1700-G012	YBB-30K2-1700-G012
PNP / Connector M12	YBB-30S2-1800-G012	YBB-30R2-1800-G012	YBB-30K2-1800-G012


## LED INDICATORS

LED indicators on the YBB **sender** unit




Power : **green** when power is ON  
 Alignment : **steady orange** when the lowest beam is not aligned  
               : **quick blinking orange** when the lowest beam is aligned  
               : **slow blinking orange** when at least 6 beams are aligned  
               : **OFF** when screen is fully aligned  
 Test : **yellow** when intrusion simulation is active  
       : **OFF** when there is no intrusion simulation

LED indicators on the YBB **receiver** unit



Power : **green** when power is ON  
 OSSD1 : **green** when OSSD1 is ON  
           : **red** when OSSD1 is OFF  
 OSSD2 : **green** when OSSD2 is ON  
           : **red** when OSSD2 is OFF

## PIN ASSIGNMENT



### M12 connector

ASSIGNMENT	FUNCTION	PINS/WIRES ON SENDER		PINS/WIRES ON RECEIVER	
		M12	OPEN CABLE	M12	OPEN CABLE
Power supply	24 VDC	1	brown	1	brown
Power supply	0 V	3	blue	3	blue
Test mode	0 V: test active 24 V: test inactive	4	black	-	-
Output	OSSD1	-	-	2	white
Output	OSSD2	-	-	4	black
Functional earth	Shield	FE	gray	FE	gray

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved. Please check our website for updates.