



ArmstrongFlooring™

Natralis®

Natralis Foothold™

Commercial Flooring

Homogeneous Vinyl Sheet

Made in Australia

Natralis® reflects the authentic colours and unique beauty found in the landscapes and animals of Australia. Play with colour, connect with place.






Armstrong Flooring are proud to acknowledge the Bunurong People of the Kulin Nation as the traditional custodians of the lands on which our production site is situated. We pay our respects to their Elders, past and present.

ArmstrongFlooring™

Proudly Manufacturing in Australia Since 1969

Natralis®

Inspired by Australia
Made in Australia

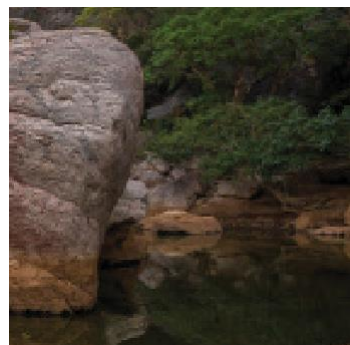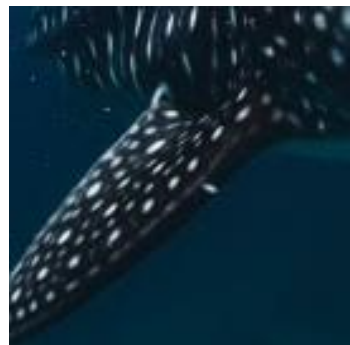

Natralis[®] homogeneous commercial sheet vinyl flooring is highly durable, easy to clean, low maintenance and meets high performance criteria.



The Australian Made Advantage

Armstrong Flooring is proud to be Australia's only manufacturer of commercial vinyl sheet flooring and a company that has been innovating and investing in local production since the 1960s.

The Natralis[™] range has all the benefits that go with local manufacturing, including local technical and colour laboratories, product development facilities and an ISO Certified production plant that offers wide product choice, 'quick ship' as standard and bespoke colour options.



The Natralis[™] range is made in Melbourne and all colours are available as stock items from our warehouse in Braeside.

Product Stewardship

We are committed to the highest quality and manufacturing standards. Our products are:

- Phthalate free
- Ultra-low VOC $\leq 50 \mu\text{g}/\text{m}^2/\text{hr}$
- 100% recyclable
- Best Practice PVC
- GreenTag rated
- Made using best environmental practices

Applications

Natralis[™] homogeneous vinyl sheet commercial flooring meets high performance criteria for applications such as Healthcare, Aged Care, Education and Hospitality.



Performance

The Natralis[™] range incorporates an exclusive polyurethane formulation, a through-pattern construction and is enhanced with an embossed polyurethane reinforced surface. This delivers ultimate protection, exceptional performance and ease of maintenance (easy cleaning).



Exceptional durability Consistent appearance, superior wear and abrasion resistance, withstanding heavy boot and rolling load traffic.



Chemical resistance Optimum surface profile for chemical resistance, easy cleaning and easy maintenance.



Waterproof Appraised by Branz to meet the NCC Deemed-to-Satisfy Performance Requirements for use as waterproofing membranes for internal wet areas when installed to specified requirements.



Hygienic Unique formulation and surface profile promotes easy cleaning and resistance to soiling. Additional infection control can be obtained with easy to heat weld and flash covers for high risk areas.



Low cost Easy maintenance with no polish required means lower maintenance and lifetime costs with reduced cleaning time and less disruption.




ArmstrongFlooring[™]


Proudly Manufacturing in Australia Since 1969

Natralis®


Inspired by Australia




Bilby 5R502211 LRV62.54




Saltbush 5R502241 LRV58.28




Clovelly Beach 5R502271 LRV55.58




Wallaroo 5R502121 LRV48.21




Stringy Bark 5R502221 LRV44.16



Alpine Gum 5R502231 LRV32.00




Lillico 5R502291 LRV39.77




Tea Tree 5R502251 LRV29.51




Ningaloo 5R502301 LRV11.46



Eucalyptus 5R502321 LRV29.66



Daintree 5R502261 LRV17.70



Windjana 5R502111 LRV12.14


Please note that variations may occur between photographic image, sample and batch colour, shade or pattern

Natralis®


Made in Australia




Osprey 5R502181 LRV48.57



Karri 5R502171 LRV42.20



Quokka 5R502191 LRV33.83




Red Gum 5R502151 LRV29.79




Billabong 5R502161 LRV30.93




Cape Pillar 5R502311 LRV19.99




Winton 5R502141 LRV21.31



Karjini 5R502131 LRV16.42



Wattle 5R502281 LRV39.90



Kookaburra 5R502201 LRV13.14

Try Our Visualiser

Upload your own photo into our Design My Room tool to see Natralis™ in your project.




Natralis Foothold™

Made in Australia

Wet Area Safety flooring

Ideal for wet areas Natralis™ Foothold sheet vinyl flooring features aluminum oxide particles for added slip resistance encapsulated in a polyurethane surface to aid maintenance and provide additional resistance against staining. It is recommended for use in 'wet barefoot areas', such as commercial bath and shower rooms.



Lillico 5R522291 LRV39.77

Try Our Visualiser


Upload your own photo into our Design My Room tool to see Natralis Foothold™ in your project.




Timberline Plus | Life is a 4X373473 LRV34.15

Natralis Foothold™

Made in Australia




Clovelly Beach 5R522271 LRV55.58




Bilby 5R522211 LRV62.54




Osprey 5R522181 LRV48.57




Lillico 5R522291 LRV39.77




Wallaroo 5R522121 LRV48.21




Quokka 5R522191 LRV33.83




Saltbush 5R522241 LRV58.28



Alpine Gum 5R522231 LRV32.00



Billabong 5R522161 LRV30.93



Tea Tree 5R522251 LRV29.51

Try Our Visualiser

Upload your own photo into our Design My Room tool to see Natralis Foothold™ in your project.



Natralis® / Natralis Foothold™

Product Classification

		Natralis®	Natralis Foothold™
Type of floor covering	EN / ISO 10581	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Product identification	EN / ISO 10581.4.1	Type I	Type I
Commercial classification	ISO 10874	34 (Very heavy)	34 (Very heavy)
Light industrial classification	ISO 10874	43 (Heavy)	43 (Heavy)

Physical Properties

Manufactured in		Australia	Australia
Roll width	ISO 24341	1.83m	1.83m
Roll length	ISO 24341	16m	16m
Coverage		29.28m ²	29.28m ²
Overall thickness	ISO 24346	2.0mm	2.0mm
Product weight	ISO 23997	3.0kg/m ²	2.9kg/m ²
Surface texture		Lightly embossed	Embossed
Polyurethane reinforced		Yes 	Yes 

Technical Performance

Residual indentation	ISO 24343-1	≤0.1mm	≤0.1mm
Colour fastness	ISO 105-B02 (Method 3a)	≥6 (PASS)	≥6 (PASS)
Chemical resistance		Good resistance	Good resistance
Flexibility	ISO 24344, Method A	20mm mandrel, no cracking	20mm mandrel, no cracking
Wear resistance	EN 660-2	Group T	Group P
Castor chair suitability	ISO 4918	Suitable	Suitable
Seam strength	ISO 16906	>240 N/50mm	>240 N/50mm

Fire & Slip Performance

Wet pendulum	AS 4586 (Appendix A)	P3	P4
Wet barefoot inclining platform	AS 4586 (Appendix C)	-	B
Oil-wet inclining platform	AS 4586 (Appendix D)	R10	R11
Critical radiant flux	ISO 9239-1	≥8kW/m ²	≥8kW/m ²
Smoke development rate	ISO 9239-1	≤750% minutes	≤750% minutes
Cone Calorimeter (Walling)	AS 5637.1	Group 3	Group 3

Installation

Installation to AS 1884 Full stick, heat welded or seambond seams

Please note recommendations are for guidance only. Refer to relevant local, state, and federal construction codes and standards for requirements.

Visit www.armstrongflooring.au or contact Customer Service on 1800 632 624 for technical data, installation, cleaning and maintenance instructions



Armstrong Flooring™

Proudly Manufacturing in Australia Since 1969