

Armstrong Flooring™

Rejuvenations™ Plus

Commercial Flooring

Heterogeneous Vinyl Sheet



Rejuvenations™ Plus

Armstrong Flooring's Rejuvenations™ Plus features a range of modern and luxurious stone and carpet visuals fit for a range of commercial settings.

The adaptable flooring designs ensure there is a design and tone to compliment any commercial space, while the benefits of heterogeneous vinyl sheet provide practicality and low maintenance for long-term wear.

Sustainable and Eco Friendly

As an industry leader, Armstrong Flooring are dedicated to developing product that is environmentally conscious and sustainably produced.



Sustainable

- Best Practice PVC
- Global GreenTag™ GreenRate Level A
- Phthalate Free and Ultra-low VOC
- Heavy metal free
- 100% Recyclable




Hygienic

- UV cured PUR coating provides resistance to soiling and prevents mould and bacterial growth.



Structure

2.0mm x 2m x 20m/Roll

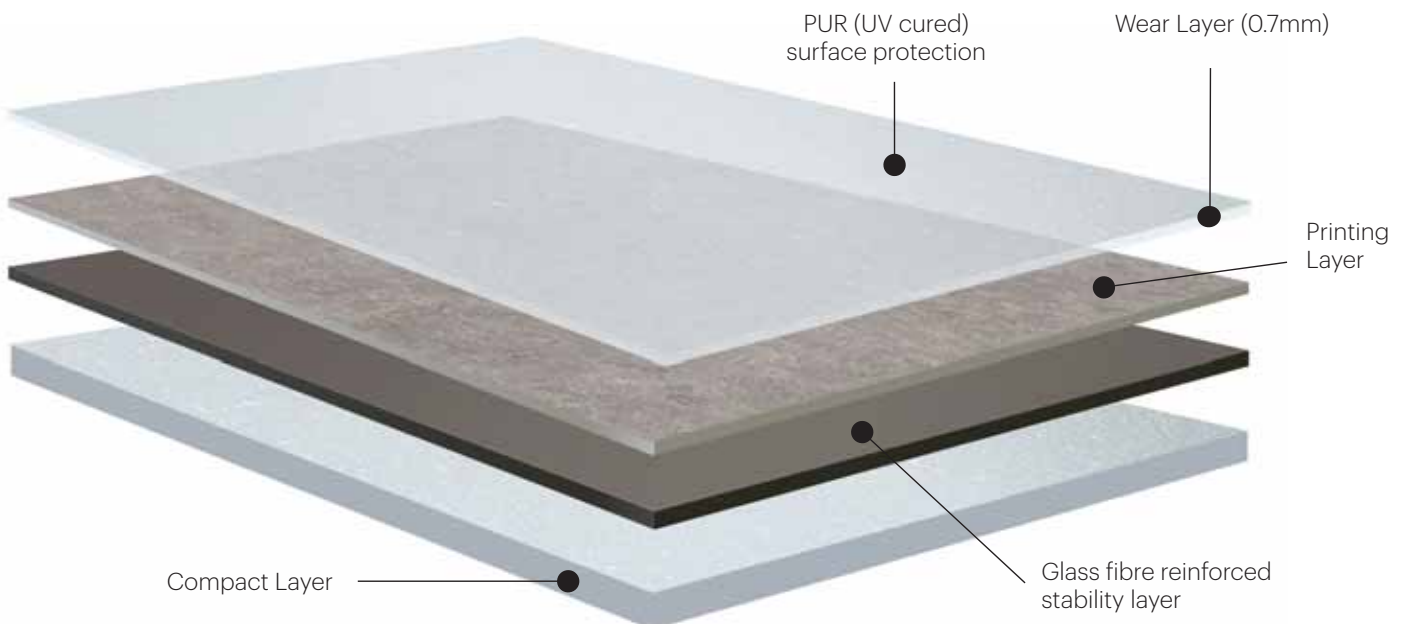

APPLICATIONS



Aged Care



Education



Hospitality



Office



Retail

PERFORMANCE



Slip Resistance

- P3 – Wet Pendulum
- R10 – Oil wet inclining platform (ramp)



100% waterproof

- Perfect for areas that often see spills



High performance

- Crafted with a 0.7mm wear layer, guaranteeing performance compliance in any environment
- Classified as Commercial 34 Very Heavy and Industrial 43 Heavy
- 15 Year Commercial Warranty



Low Maintenance

- Protective Polyurethane Wear Layer reduces initial and ongoing maintenance
- Easy to clean



Upload your own photo



See our floors in your project with the Design My Room visualiser!

Transform your space in an instant.



Pure Steel featured in visualiser



Moonstone
4K035312

Rejuvenations™ Plus
MoonStone

4K035312



Full pattern repeat: 2,000mm X 1,840mm



Khaki Sand
4K035332





Pure Steel
4K035342



Slate Grey
4K316042



RETAIL

Rejuvenations™ Plus

2.0mm x 2m x 20m

P3

R10

SLIP RESISTANCE



Moonstone - 4K035312



Khaki Sand - 4K035332



Pure Steel - 4K035342



Slate Grey - 4K316042



Shadow
4K037412



Rejuvenations™ Plus

Shadow

4K037412

Full pattern repeat: 2,000mm X 1,840mm



Cloudy Grey
4K037222



Rejuvenations™ Plus
Cloudy Grey

4K037222

Full pattern repeat: 2,000mm X 1,840mm



Graphite – 4K092012



Carbon – 4K092032

Highly Versatile for Design Flexibility

Rejuvenations™ Plus sheets can be heat welded to provide great design options whilst maintaining a hygienic finish.

Rejuvenations™ Plus works seamlessly with other Armstrong Flooring commercial products to create beautiful, coordinated spaces, allowing you to choose the right flooring for your space without compromising your design intent.

Rejuvenations™ Plus

2.0mm x 2m x 20m

P3

R10


SLIP RESISTANCE



Shadow - 4K037412



Cloudy Grey - 4K037222

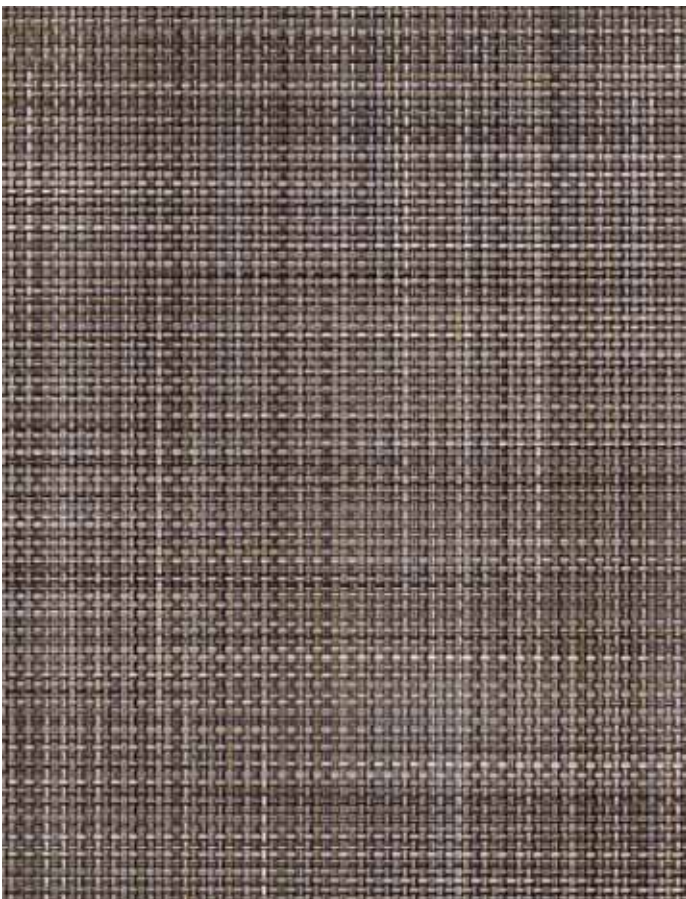

Graphite - 4K092012



Carbon - 4K092032


Rejuvenations™ Plus

2.0mm x 2m x 20m

P3

R10


SLIP RESISTANCE

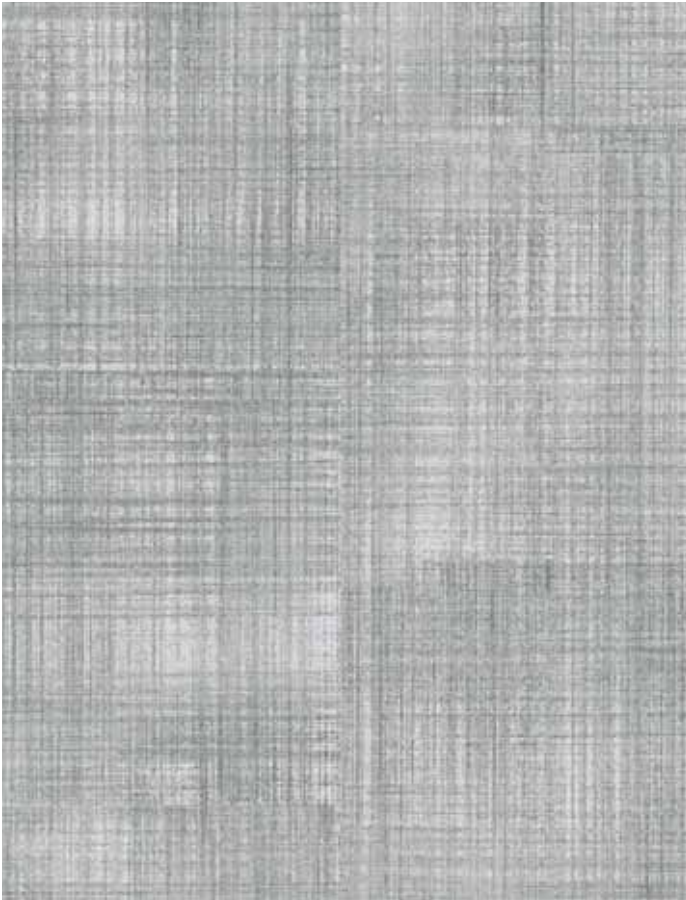

Zinc – 4K315032



Sparkly Beige – 4K315062

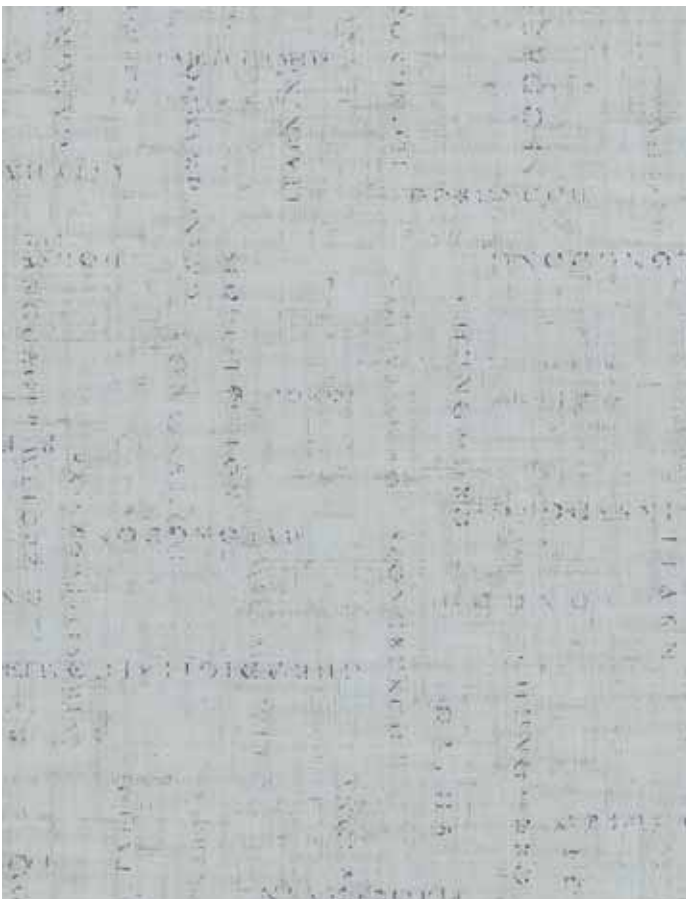

Oatmeal – 4K281012



Hunter Brown – 4K281032



Sparkly Beige
4K315062



Zinc
4K315032





Oatmeal
4K281012



AGED CARE





Hunter Brown
4K281032



EDUCATION

Rejuvenations™ Plus Technical Data

Product Classification

Type of floor covering	EN / ISO 10582	Heterogeneous sheet vinyl
Product identification	EN / ISO 10581.4.1	Type I
Commercial classification	ISO 10874	34 (Heavy) 
Light industrial classification	ISO 10874	43 (General) 

Physical Properties

Manufactured in		South Korea
Roll width	ISO 24341	2m
Roll length	ISO 24341	20m
Coverage	—	40m ²
Overall thickness	ISO 24346	2.0mm
Wear layer thickness	ISO 24340	0.7mm
Product weight	ISO 23997	3.1kg/m ²
Surface treatment	—	PUR (UV Cured)
Plank size (within pattern) -nominal	143 x 920mm	
Pattern repeat (mm)	Full size: 2000 x 1840mm	

Technical Performance

Residual indentation	ISO 24343-1	≤ 0.1mm (PASS)
Colour fastness	ISO 105-B02 (Method 3g)	≥ 6 (PASS)
Flexibility	ISO 24344, Method A	20mm mandrel, no cracking (PASS)
Wear resistance	EN 660-2	Group T
Castor chair suitability	ISO 4918	PASS
Seam strength	ISO 16906	PASS
Dimensional stability	ISO 23999	≤ 0.40% (PASS)
Curling after exposure to heat	ISO 23999	≤ 8mm (PASS)
Stain resistance	ISO 26987	No change
Chemical resistance	—	Good resistance

Fire & Slip Performance

Wet pendulum	AS 4586 (Appendix A)	P3
Oil-wet inclining platform	AS 4586 (Appendix D)	R10
Critical radiant flux	ISO 9239-1	≥ 8kW/m ²
Smoke development rate	ISO 9239-1	≤ 750%.minutes

Installation

Installation to current AS1884	Full Spread adhesive.
Seaming	Heat welded with matching weld rod, chemical seam seal (follow Armstrong HET installation instructions)
Recommended adhesive	Armstrong Flooring; Full spread SV-200, Coving & Accessories: SC-100 Contact Adhesive.



SLIP RESISTANT



WATERPROOF



HYGIENIC



HIGH PERFORMANCE




LOW MAINTENANCE



SUSTAINABLE



Armstrong Flooring™

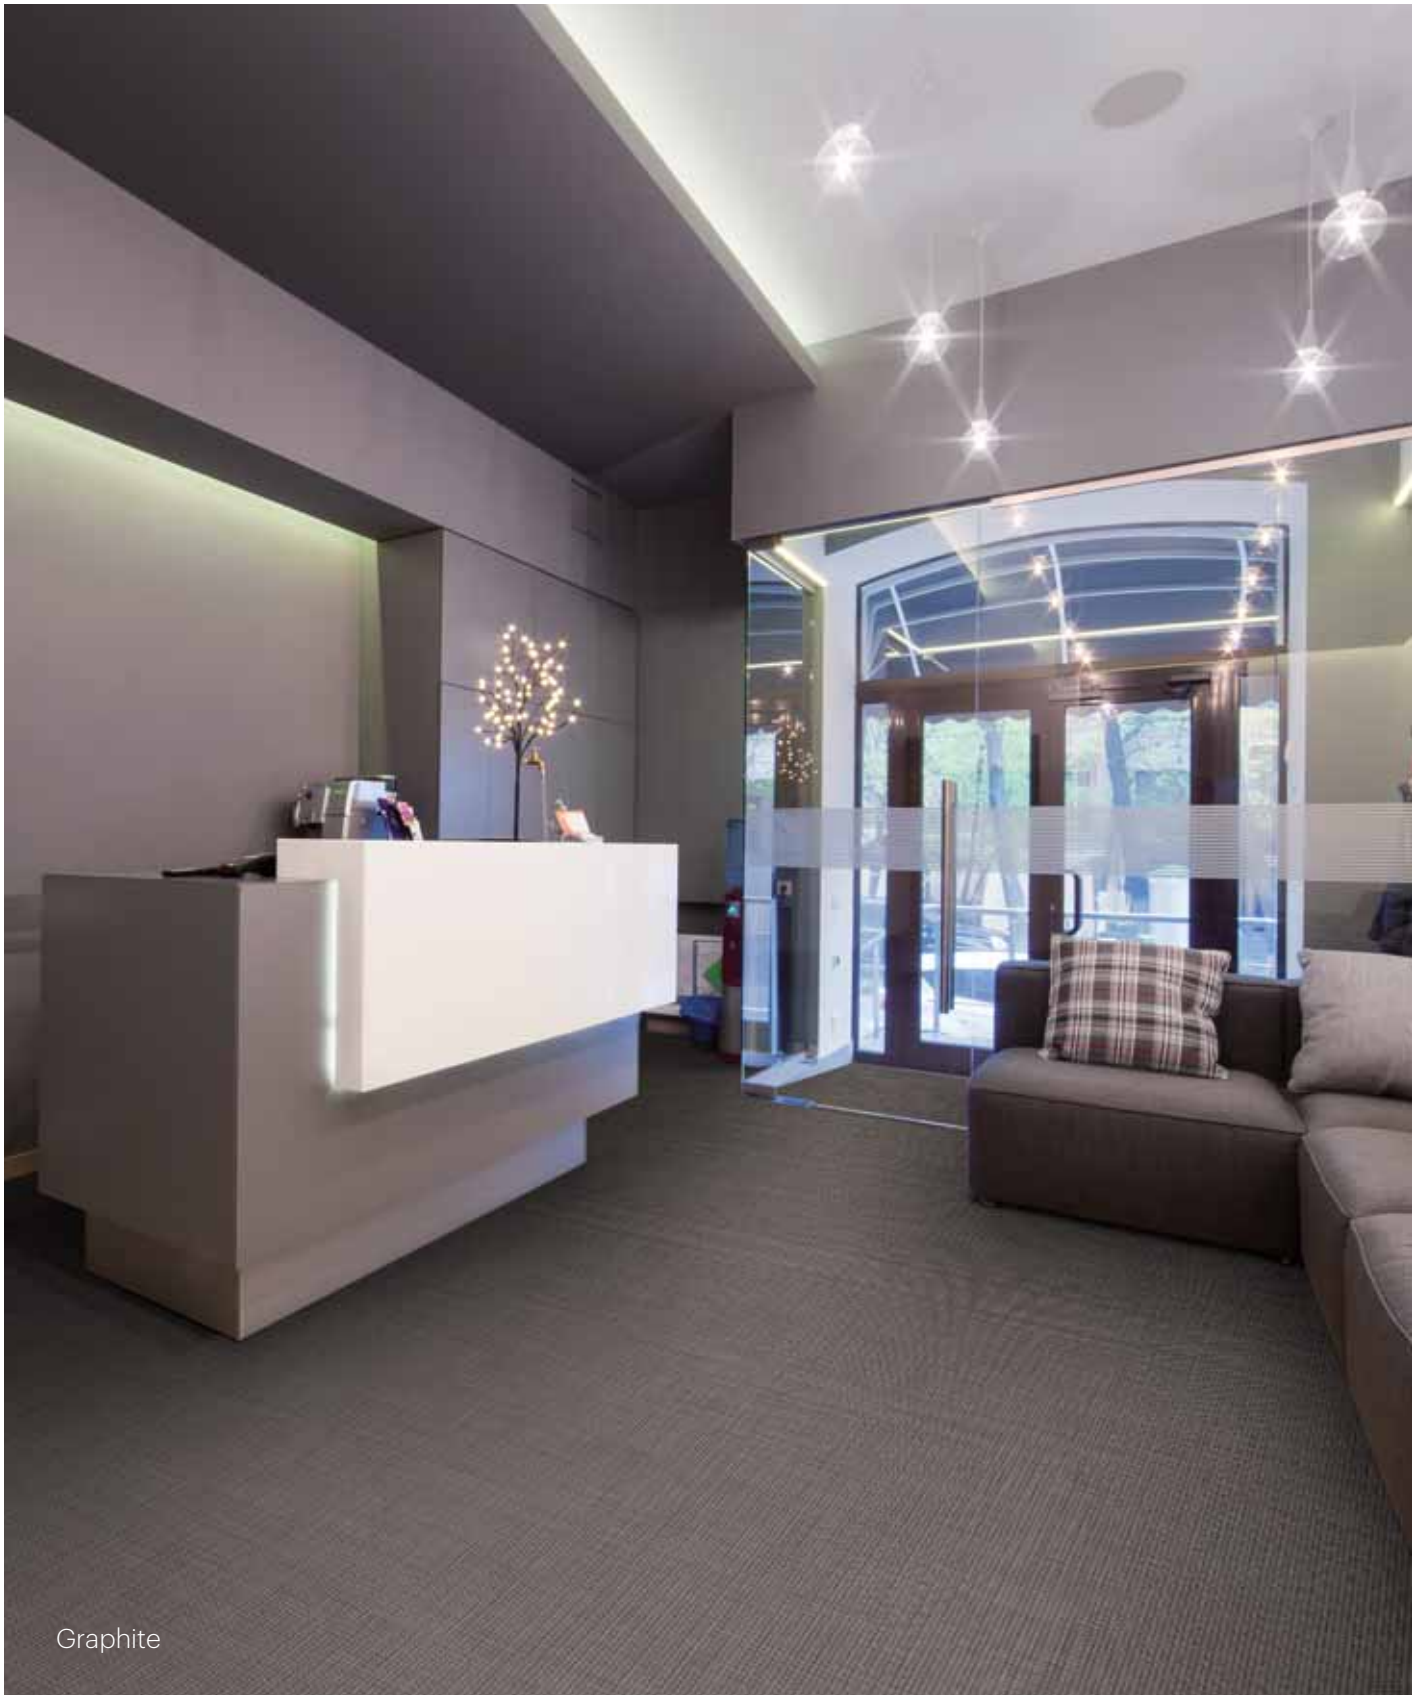

Graphite

Armstrong Flooring™
29 - 39 Mills Road Braeside 3195
Victoria Australia
1800 632 624
www.armstrongflooring.au



May 2023