

# Armstrong Flooring™

## Rejuvenations™

Commercial Flooring  
Heterogeneous Vinyl Sheet



# Rejuvenations™

All new Rejuvenations™ from Armstrong Flooring offers a range of low maintenance wood look Heterogeneous Vinyl Sheet Flooring, with P3 & R10 Slip Resistance and a 0.55mm High Performance Wear Layer.

The combination of a warm, natural timber look and ease of maintenance makes Rejuvenations ideal for aged and health care facilities, educational, retail, and residential environments.

- Protective Polyurethane Wear Layer reduces initial and ongoing maintenance
- High-performance PUR coating resists soil, stains, scratches, scuffs and abrasions
- P3 & R10 Slip Resistance
- Classified as Commercial 33 and Industrial 42 (0.55mm wear layer)
- Backed with Armstrong 15 Year Commercial Warranty

## Sustainable and Eco Friendly

At Armstrong Flooring, we focus our innovation on the development and delivery of inspired products which contribute to more sustainable spaces.




### Sustainable

- Phthalate Free and Ultra-low VOC
- Heavy metal free
- Fully recyclable

## Structure

2.0mm x 2m x 20m/Roll

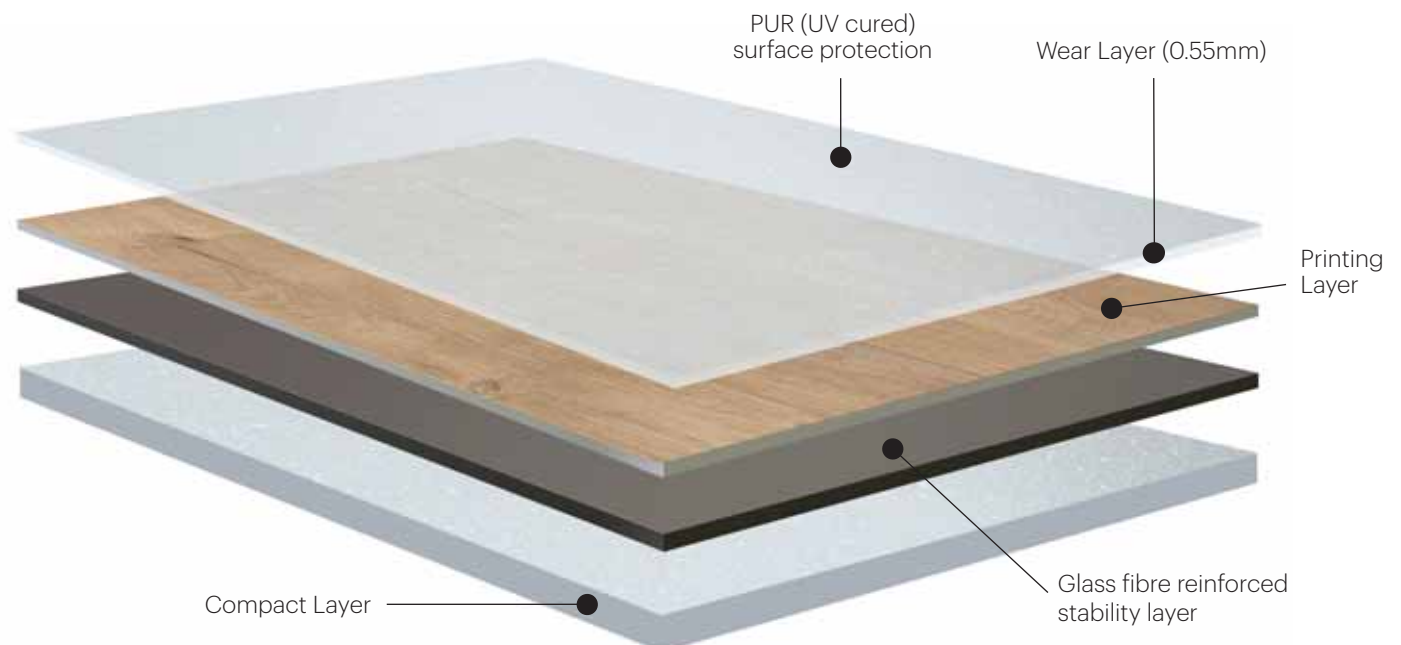

## APPLICATIONS



Aged Care



Hospitality



Education



Retail

## PERFORMANCE



### Slip Resistance

- P3 - Wet Pendulum
- R10 - Oil wet inclining platform (ramp)



### 100% waterproof

- Perfect for areas that often see spills



### Hygienic

- UV cured PUR coating provides resistance to soiling, and prevents mould and bacterial growth.



### Durable

- High Density 0.55mm Wear Layer
- Classified as Commercial 33 and Industrial 42



### Low Maintenance

- Protective Polyurethane Wear Layer reduces initial and ongoing maintenance



### Upload your own photo



See our floors in your room with the Design My Room visualiser!

Transform your space in an instant.



# Rejuvenations

2.0mm x 2m x 20m

P3

R10

SLIP RESISTANCE



4K039112\_Weathered Oak



4K039122\_Natural Oak



4K039142\_Warm Oak



4K039222\_Chateau Oak

# Rejuvenations

2.0mm x 2m x 20m

P3

R10

SLIP RESISTANCE



4K323022\_Lime Oak



4K324022\_Coastal Oak.



4K323032\_Mountain Oak



4K039322\_Midnight Oak

# Rejuvenations Lime Oak


4K323022



Full Size: 2,000mm X 1,840mm



Plank Size: 143mm X 920mm

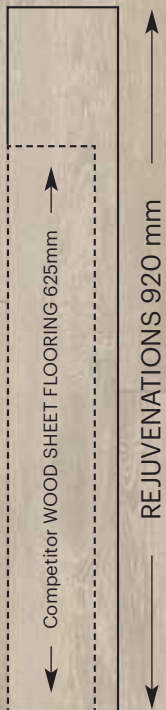

Competitor WOOD SHEET FLOORING 625mm

REJUVENATIONS 920 mm

BIG SIZE DESIGN



# Rejuvenations Coastal Oak

4K324022



Full Size: 2,000mm X 1,840mm



Plank Size: 143mm X 920mm



Competitor WOOD SHEET FLOORING 625mm

REJUVENATIONS 920 mm

BIG SIZE DESIGN





Coastal Oak



RETAIL






Chateau Oak



Mountain Oak



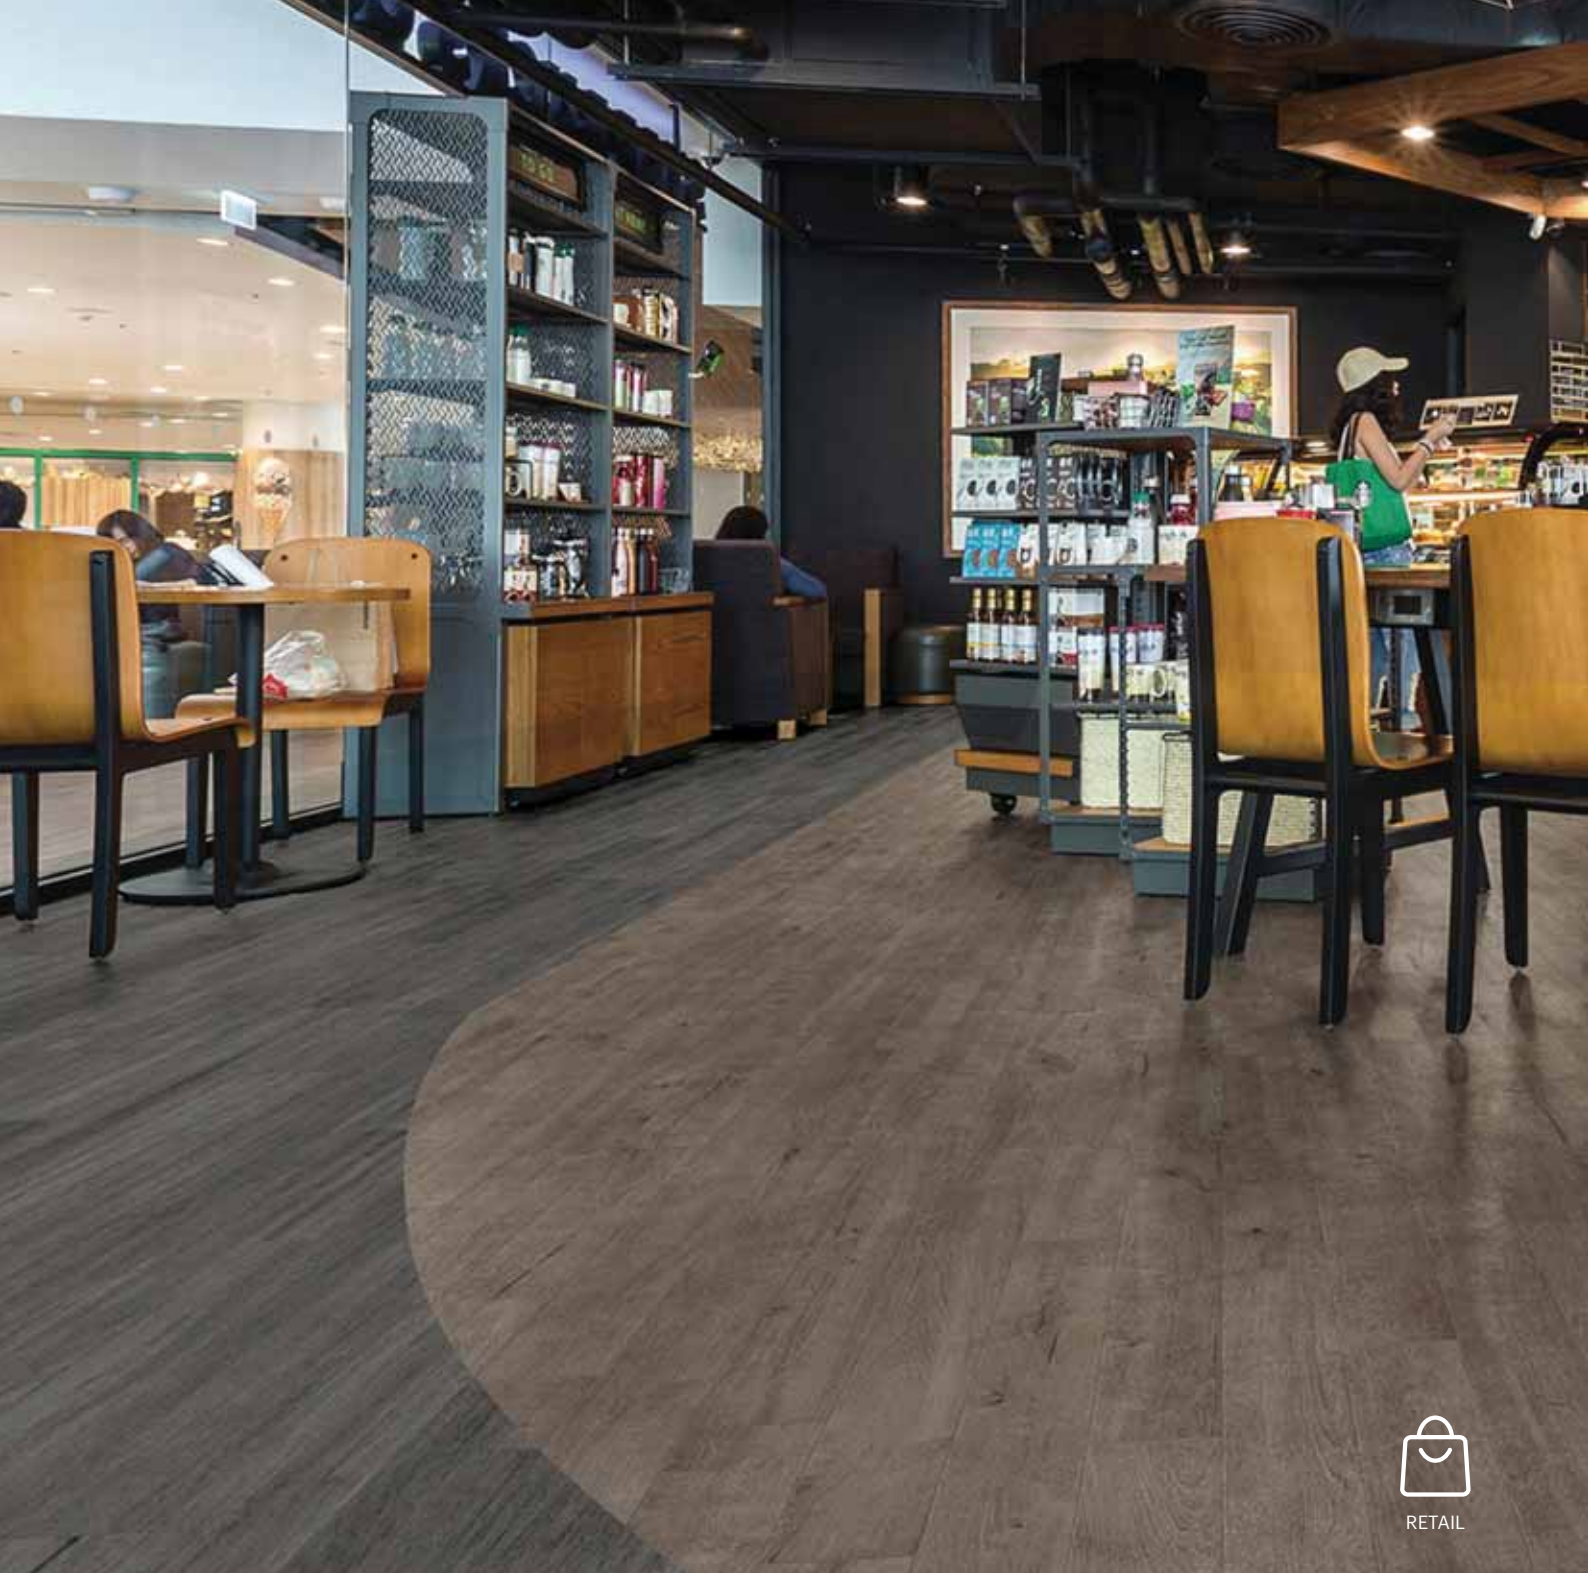

4K039322\_Midnight Oak



4K039142\_Warm Oak

### Highly Versatile for Design Flexibility

Rejuvenations™ sheets can be heat welded to provide great design options whilst maintaining a hygienic finish.

Rejuvenations™ works seamlessly with other Armstrong Commercial Flooring products to create beautiful, coordinated spaces, allowing you to choose the right flooring for your space without compromising your design intent.



4K323032\_Mountain Oak



4K039112\_Weathered Oak





Weathered Oak



## Rejuvenations Technical Data

### Product Classification

Type of floor covering	EN / ISO 10582	Heterogeneous sheet vinyl
Product identification	EN / ISO 10581.4.1	Type I
Commercial classification	ISO 10874	33 (Heavy) 
Light industrial classification	ISO 10874	42 (General) 

### Physical Properties

Manufactured in		South Korea
Roll width	ISO 24341	2m
Roll length	ISO 24341	20m
Coverage	—	40m <sup>2</sup>
Overall thickness	ISO 24346	2.0mm
Wear layer thickness	ISO 24340	0.55mm
Product weight	ISO 23997	3.1kg/m <sup>2</sup>
Surface treatment	—	PUR (UV Cured)
Plank size (within pattern) -nominal	143 x 920mm	
Pattern repeat (mm)	Full size: 2000 x 1840mm	

### Technical Performance

Residual indentation	ISO 24343-1	≤ 0.1mm (PASS)
Colour fastness	ISO 105-B02 (Method 3g)	≥ 6 (PASS)
Flexibility	ISO 24344, Method A	20mm mandrel, no cracking (PASS)
Wear resistance	EN 660-2	Group T
Castor chair suitability	ISO 4918	PASS
Seam strength	ISO 16906	PASS
Dimensional stability	ISO 23999	≤ 0.40% (PASS)
Curling after exposure to heat	ISO 23999	≤ 8mm (PASS)
Stain resistance	ISO 26987	No change
Chemical resistance	—	Good resistance

### Fire & Slip Performance

Wet pendulum	AS 4586 (Appendix A)	P3
Oil-wet inclining platform	AS 4586 (Appendix D)	R10
Critical radiant flux	ISO 9239-1	> 8kW/m <sup>2</sup> (PASS)
Smoke development rate	ISO 9239-1	< 750% minutes (PASS)

### Installation

Installation to current AS1884	Full Spread adhesive.
Seaming	Heat welded with matching weld rod, chemical seam seal (follow Armstrong HET installation instructions)
Recommended adhesive	Armstrong Flooring; Full spread SV-200, Coving & Accessories: SC-100 Contact Adhesive.



SLIP RESISTANT



WATERPROOF



HYGIENIC



DURABLE




LOW MAINTENANCE



SUSTAINABLE

# Armstrong Flooring™

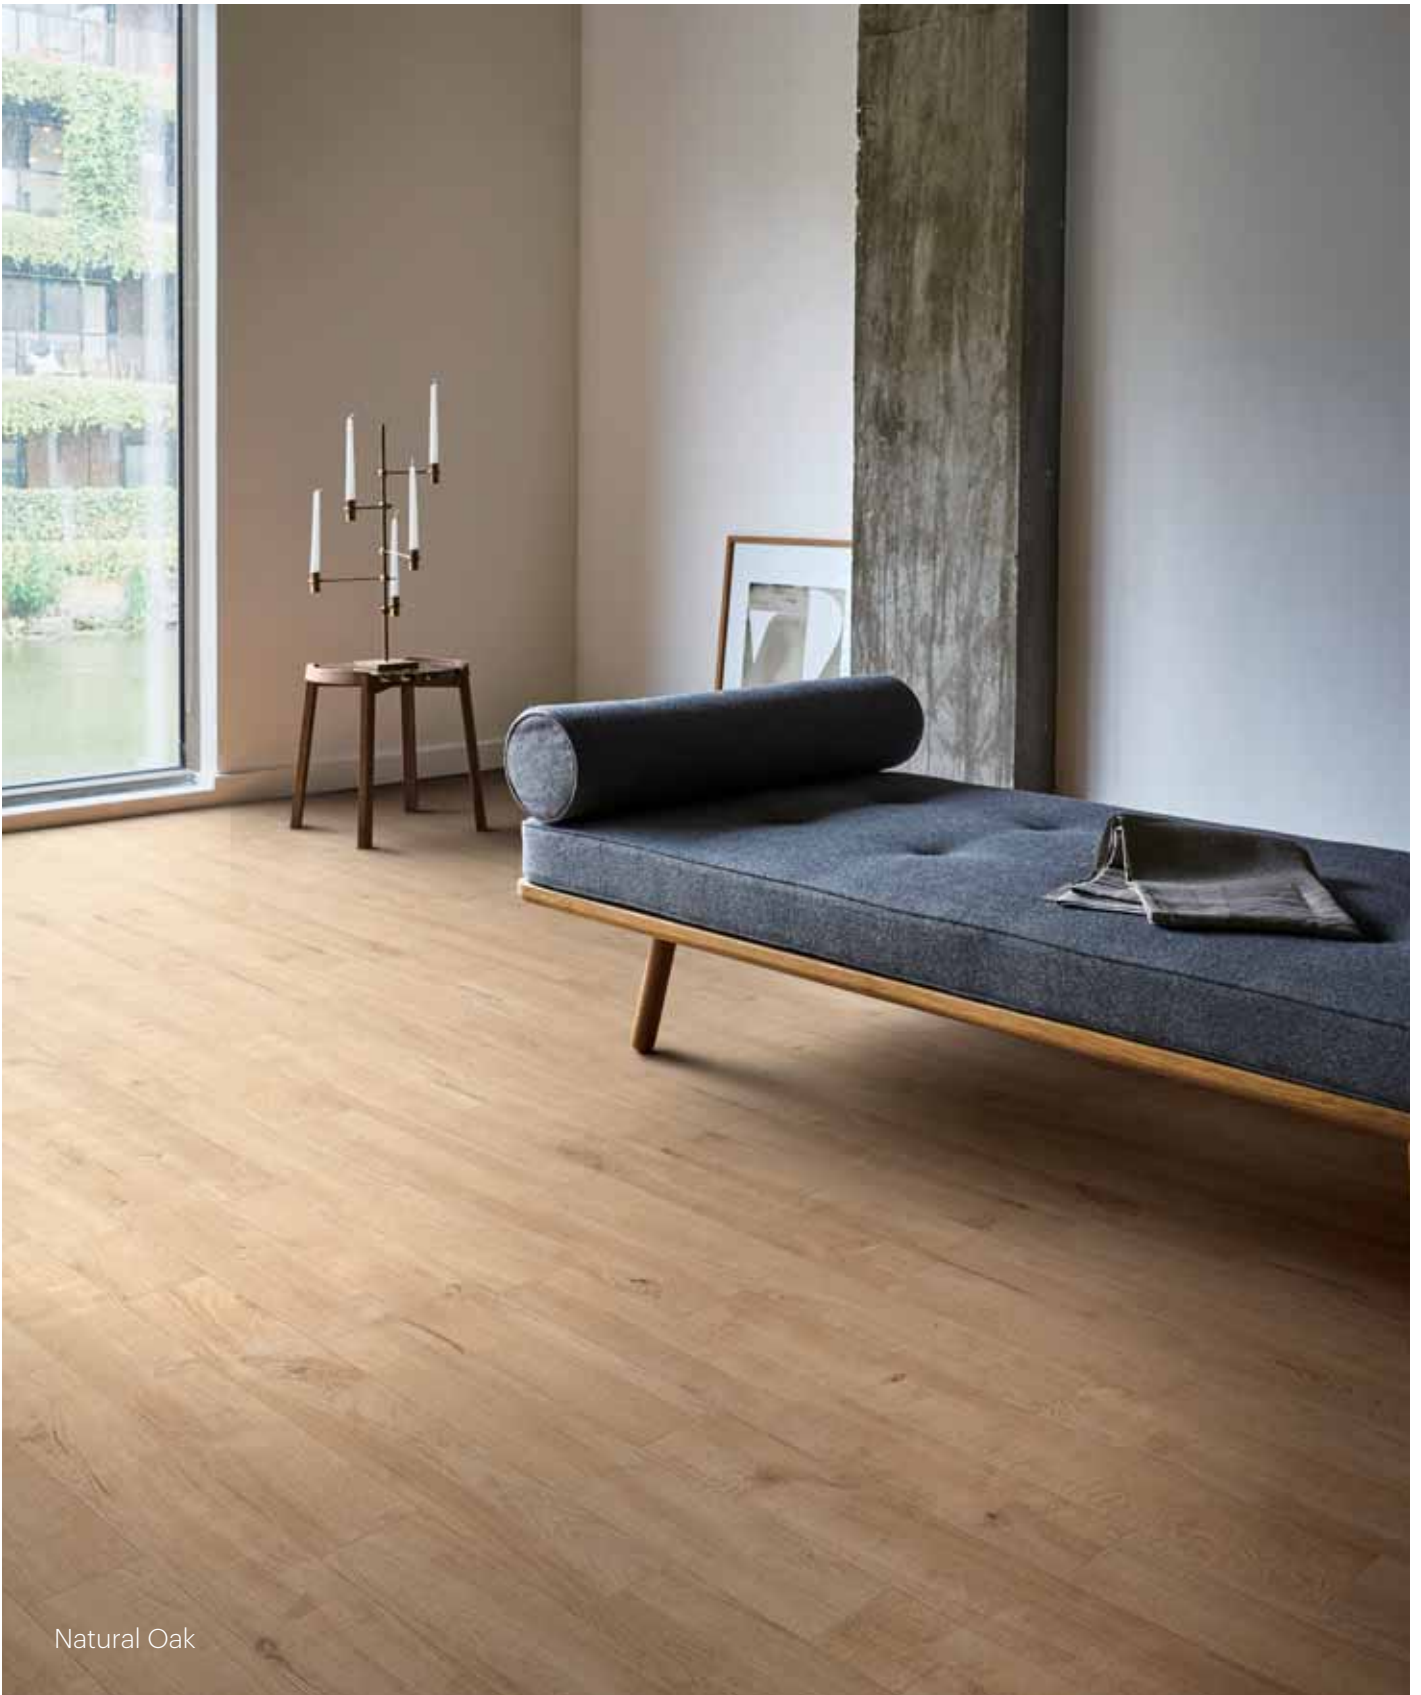

Natural Oak

Armstrong Flooring™  
29 - 39 Mills Road Braeside 3195  
Victoria Australia  
1800 632 624  
[www.armstrongflooring.au](http://www.armstrongflooring.au)



May 2023