

# Chatsworth

## Roller, Roman & Panel Fabric



- Application:**
- Roller, Roman and Panel Window Blinds
  - Wide Width Windows

- Characteristics:**
- Width: 3000mm

- Technical:**
- Composition (BO): 100% Polyester with Foamed Acrylic Backing
  - Composition (LF): 100% Polyester with Acrylic Coating
  - PVC Free | Lead Free
  - Light Fastness: 6 (Blue Scale) Tested to ISO 105-B02:2014
  - Nominal weight: 375 gsm (BO), 165 gsm (LF)
  - Nominal thickness: 0.42 mm (BO), 0.32 mm (LF)

- Performance:**
- Opacity: Blackout (Complies to AS 2663.3.1999)

- Protection:**
- Complies with Building Code of Australia requirements for Class 2 to 9 (a) buildings.
  - Tested to AS 1530 Part III.
  - Greenguard Gold - accredited for use in sensitive areas eg. schools and healthcare facilities (tested against California section 01359 for low chemical emissions (VOCs))

- Care:**
- Surface dust should be removed with duster or soft cloth.
  - Never use abrasive products or solvents/industrial based cleaners.

- Note:**
- Colour variances may occur between fabric production batches.
  - These variances are within industry tolerances.

### Colour Range \*



\* Images representative only



Chatsworth (BO)

# Karma

## Roller, Panel & Vertical Fabric



- Application:**
- Roller, Panel & Vertical Window Blinds
  - Wide Width Windows

- Characteristics:**
- 3000mm, 89mm, 127mm

- Technical:**
- Composition: 100% Polyester with Acrylic Coating
  - PVC Free | Lead Free
  - Light Fastness: 6 (Blue Scale) Tested to ISO 105-B02:2014
  - Nominal Weight: 460gsm
  - Nominal Thickness: 0.70mm

- Performance:**
- Opacity: Blackout (Complies to AS 2663.3.1999)
  - UV Protection: Tested to AS/NZS 4399:1996
  - UVA: 99.95% | UVB: 99.95%

- Protection:**
- Complies with Building Code of Australia requirements for Class 2 to 9 (a) buildings. Tested to AS 1530 Part III.
  - Air Quality: VOC Tested US EPA 5021A:2003
  - Greenguard Gold - accredited for use in sensitive areas eg schools and healthcare facilities (tested against California Section 01359 for low chemical emissions (VOCs))

- Care:**
- Surface dust should be removed with duster or soft cloth. Never use abrasive products or solvent/industrial based cleaners.

- Note:**
- Colour variances may occur between fabric production batches. These variances are within industry tolerances.

### Colour Range \*



Karma



\* Images representative only

# Le Reve

## Roller, Roman & Panel Fabric



- Application:**
- Roller, Roman and Panel Window Blinds
  - Wide Width Windows

- Characteristics:**
- 10 Blackout (BO), 10 Light Filtering (LF)
  - Width: 3000mm

- Technical:**
- Composition (BO): 100% Polyester with Colour Co-Ordinated Foamed Acrylic Backing
  - Composition (LF): 100% Polyester with Acrylic Coating
  - PVC Free
  - Light Fastness: minimum 5 (Blue Scale) Tested to ISO 105-B02:2014
  - Nominal Weight: 410gsm (BO), 250gsm (LF)
  - Nominal Thickness: 0.65mm (BO), 0.30mm (LF)


- Performance:**
- Opacity: Light Filtering and Blackout (Complies to AS 2663.3.1999)

- Protection:**
- Complies with Building Code of Australia requirements for Class 2 to 9 (a) buildings. Tested to AS 1530 Part III.

- Care:**
- Surface dust should be removed with duster or soft cloth. Never use abrasive products or solvent/industrial based cleaners.

- Note:**
- Colour variances may occur between fabric production batches. These variances are within industry tolerances.


### Colour Range \*

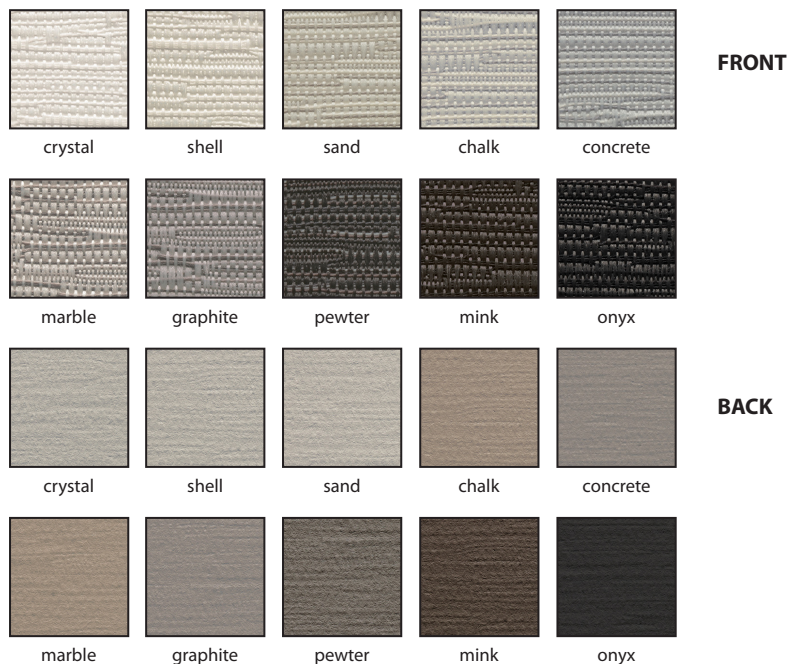

\* Images representative only

# Linesque

## Roller, Roman & Panel Fabric



- Application:**
- Roller, Roman & Panel Window Blinds
  - Wide Width Windows

- Characteristics:**
- 3000mm

- Technical:**
- Composition: 100% Polyester with Acrylic Coating
  - PVC Free | Lead Free
  - Light Fastness: 6 (Blue Scale) Tested to ISO 105-B02:2014
  - Nominal Weight: BO 431gsm | LF 285gsm
  - Nominal Thickness: BO 0.65mm | LF 0.55mm

- Performance:**
- Opacity: 100% Blackout
  - Tear Resistance:  
LF Mean Length 126 Warp 128 N  
BO Mean Length 150 Warp 139 N  
Tested to AS 2001.2.10-1986

- Protection:**
- Complies with Building Code of Australia requirements for Class 2 to 9 (a) buildings. Tested to AS 1530 Part III.
  - Air Quality: VOC Tested US EPA 5021A:2003
  - Greenguard Gold - accredited for use in sensitive areas eg schools and healthcare facilities (tested against California Section 01359 for low chemical emissions (VOCs))


- Care:**
- Surface dust should be removed with duster or soft cloth.  
Never use abrasive products or solvent/industrial based cleaners.

- Note:**
- Colour variances may occur between fabric production batches.  
These variances are within industry tolerances.

### Colour Range \*




Linesque

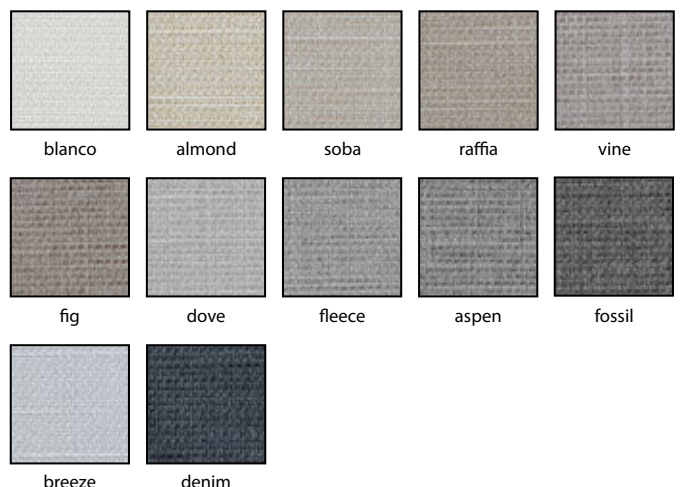

\* Images representative only

## Light Filtering Colours

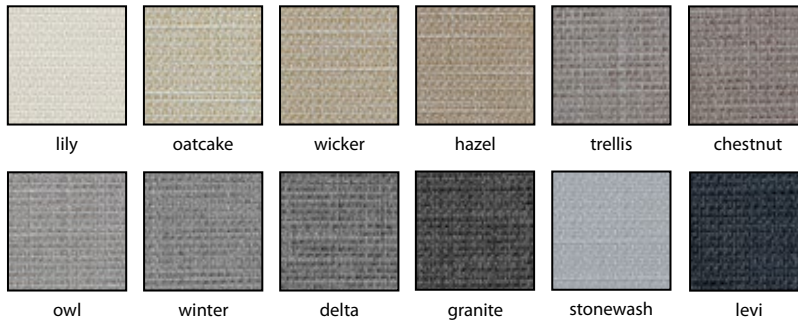


Quality	SHAW Colour Name	Quality	SHAW Colour Name
Blackout (BO)	Blanco	Light Filtering (LF)	Lily
Blackout (BO)	Almond	Light Filtering (LF)	Oatcake
Blackout (BO)	Soba	Light Filtering (LF)	Wicker
Blackout (BO)	Raffia	Light Filtering (LF)	Hazel
Blackout (BO)	Vine	Light Filtering (LF)	Trellis
Blackout (BO)	Fig	Light Filtering (LF)	Chestnut
Blackout (BO)	Dove	Light Filtering (LF)	Owl
Blackout (BO)	Fleece	Light Filtering (LF)	Winter
Blackout (BO)	Aspen	Light Filtering (LF)	Delta
Blackout (BO)	Fossil	Light Filtering (LF)	Granite
Blackout (BO)	Breeze	Light Filtering (LF)	Stonewash
Blackout (BO)	Denim	Light Filtering (LF)	Levi

LF and BO colour variation occurs due to the nature of the finishing process.

# Mantra

## Roller, Roman & Panel Fabric



- Application:**
- Roller, Roman and Panel Window Blinds
  - Wide Width Windows

- Characteristics:**
- Width: 3000mm

- Technical:**
- Composition (BO): 100% Polyester with Foamed Acrylic Backing
  - Composition (LF): 100% Polyester with Acrylic Coating
  - PVC Free
  - Light Fastness: minimum 5 (Blue Scale) Tested to ISO 105-B02:2014
  - Nominal Weight: 410gsm (BO), 210gsm (LF)
  - Nominal Thickness: 0.65mm (BO), 0.30mm (LF)

- Performance:**
- Opacity: Light Filtering and Blackout (Complies to AS 2663.3.1999)

- Protection:**
- Complies with Building Code of Australia requirements for Class 2 to 9 (a) buildings. Tested to AS 1530 Part III.


- Care:**
- Surface dust should be removed with duster or soft cloth.
  - Never use abrasive products or solvent/industrial based cleaners.

- Note:**
- Colour variances may occur between fabric production batches. These variances are within industry tolerances.

### Colour Range \*



Mantra

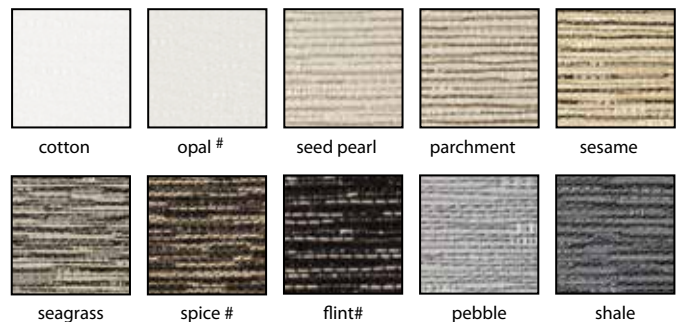

# blackout only

\* Images representative only

# Palm Beach

Roller, Roman & Panel Fabric



- Application:**
- Roller, Roman and Panel Window Blinds
  - Wide Width Windows

- Characteristics:**
- 3000mm Blackout (BO) All Colours (12) | 2400mm Blackout (BO) Selected Colours# (6)
  - 3000mm Light Filtering (LF) Selected Colours ° (7)

- Technical:**
- Composition (BO): 100% Polyester with Foamed Acrylic Backing
  - Composition (LF): 100% Polyester with Acrylic Coating
  - PVC Free | Lead Free
  - Light Fastness: 6 (Blue Scale) Tested to ISO 105-B02:2014
  - Nominal weight: 410 gsm (BO), 310 gsm (LF)
  - Nominal thickness: 0.65 mm (BO), 0.55 mm (LF)


- Performance:**
- Opacity: Blackout (Complies to AS 2663.3.1999)
  - UV Protection: Tested to AS/NZS 4399:1996  
BO: UVA 99.95% | UVB 99.95  
LF: UVA 99.59% | UVB 99.95

- Protection:**
- Complies with Building Code of Australia requirements for Class 2 to 9 (a) buildings.
  - Tested to AS 1530 Part III.
  - Air Quality: VOC Tested US EPA 5021A:2003
  - Greenguard Gold Accredited

- Care:**
- Surface dust should be removed with duster or soft cloth. Never use abrasive products or solvents/industrial based cleaners.

- Note:**
- Colour variances may occur between fabric production batches. These variances are within industry tolerances.

## Colour Range \*

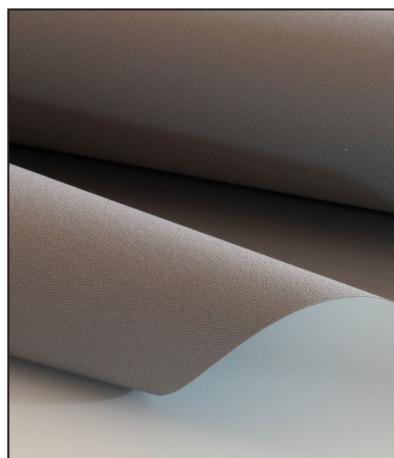

Palm Beach (BO)



# available in 2400mm ° light filtering

\* Images representative only

# Vibe

## Roller, Vertical & Panel Fabric



- Application:**
- Roller, Vertical and Panel Blinds
  - Wide Width Windows


- Characteristics:**
- 28 matt finishes, 3 metallic finishes
  - Matt 6 widths: 89mm, 100mm, 127mm, 2000mm, 2500mm, 3000mm
  - Metallic 4 widths: 89mm, 100mm, 127mm, 3000mm

- Technical:**
- Composition: 100% polyester with acrylic coating
  - Nominal Weights: 360gsm - 400gsm
  - Nominal thickness: 0.33mm - 0.36mm
  - PVC & Lead free
  - Light Fastness: minimum 6 (Blue Scale). Tested to ISO 105-B02:2014
  - Cutting: Ultrasonic, Crush, Knife

- Performance:**
- Opacity: Blackout. Exceeds standard AS2663.3:1999.
  - Dust and Mould Resistant

- Protection:**
- Complies with Building Code of Australia requirements for Class 2 to 9 (a) buildings.
  - Tested to AS 1530 Part III.
  - Air Quality: VOC Tested US EPA 5021A:2003
  - Greenguard Gold Accredited (no harmful VOC emissions)

- Care:**
- Surface dust should be removed with duster or soft cloth. Fabric may be wiped with a damp sponge and dried with a clean cloth. Never use abrasive products or solvents/industrial based cleaners. Do not roll up fabric which is damp.

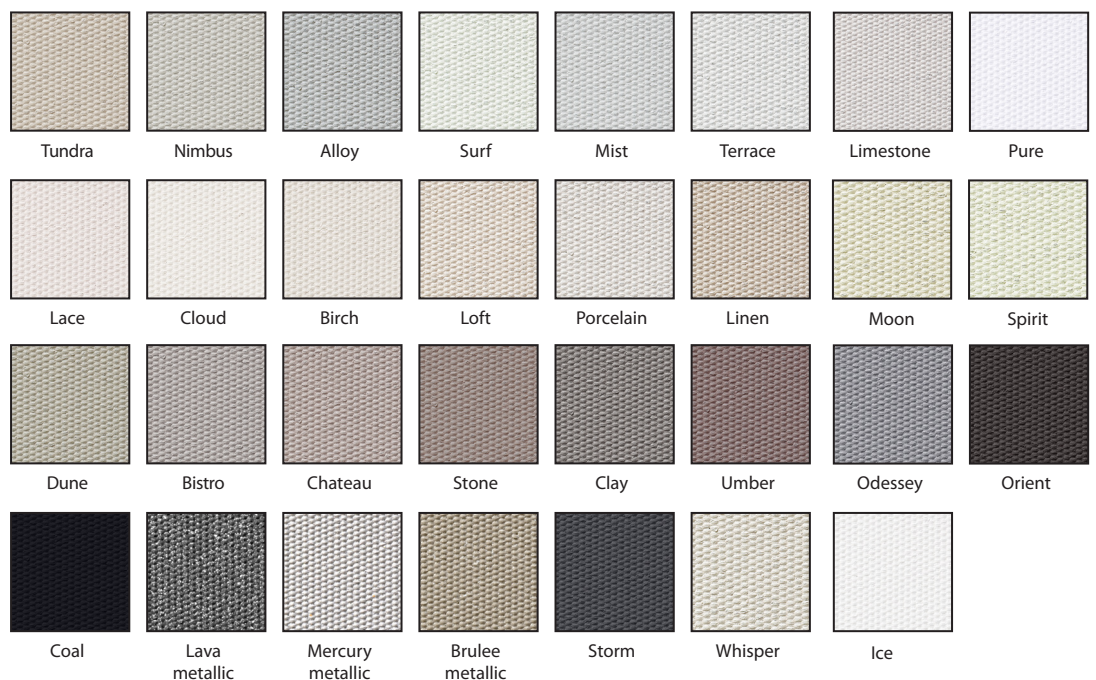

\* Images representative only