

SE4192-SWBPAL(Y)(DXX) Enclosed dipole, 14-18 dBd, Adj. beamwidth, Low PIM, 746-960 MHz

- New wide band design covers 746-960 MHz band, PIM cert. and PIP rated
- Horizontal beamwidth can be adjusted (60°/90°/105°/130°/160°)
- Gain depends on horizontal beamwidth setting (18/16.5/15.5/15/14 dBd)
- PIP rated and low PIM

One wideband antenna for your 700, 800, 900 MHz systems. Sinclair's SE4192-WBL series of enclosed dipole arrays offer excellent intermodulation performance covering 746-960 MHz in a single antenna. These highly versatile antennas are particularly well suited to communication systems where a specific coverage pattern is required. These include cellular systems, trunked radio, paging, and data transmission, where predictable and highly reliable performance is a must.

The SE4192-WBAL series come with field adjustable reflectors that provide horizontal beamwidths between 60 and 160 degrees. The creative design and construction permits excellent pattern control and greater efficiency.

When ordering, please refer to the chart below for the model number. Different configurations are subject to various list prices. Please contact your Sinclair Sales Representative or Customer Service Representative for more information.

Model Number	Connector	Downtilt	PIM(dBc)	PIP(kW, max)
SE4192-SWBPALDF(D00)	7/16 DIN(F)	0°	<-150	25
SE4192-SWBPALDF(D01)	7/16 DIN(F)	1°	<-150	25
SE4192-SWBPALDF(D02)	7/16 DIN(F)	2°	<-150	25
SE4192-SWBPALDF(D03)	7/16 DIN(F)	3°	<-150	25
SE4192-SWBPALDF(D04)	7/16 DIN(F)	4°	<-150	25
SE4192-SWBPALDF(D05)	7/16 DIN(F)	5°	<-150	25
SE4192-SWBPALDF(D06)	7/16 DIN(F)	6°	<-150	25



Antenna may not appear exactly as shown in image

Region	United States	Europe, Middle East, and Africa	Canada, Caribbean, and Latin America	Asia-Pacific
Telephone	1 800 263 3275	+1 905 727 0165 ext 232	Canada: 1 905 726 7676 International: +1 905 726 7676	+1 905 727 0165 ext 287
E-mail	salesusa@sinctech.com	salesemea@sinctech.com	salescan@sinctech.com	salesasia@sinctech.com

#### Electrical Specifications

Frequency Range	MHz	746 to 960	
Bandwidth	MHz	214	
Gain (nominal)	dBd (dBi)	18 (20.1)	*1
Input VSWR (max)		1.5:1	
Polarization		vertical	
Impedance	Ω	50	
Pattern		Directional and Adjustable	
Horizontal beamwidth (typ)	degrees	60	*2
Vertical beamwidth (typ)	degrees	4	
Average Input Power (max)	W	500	
Front-to-back ratio (min)	dB	20	
Grounding		All metal parts DC-grounded	

#### Mechanical Specifications

Width	in (mm)	25 (635)	*3
Depth	in (mm)	8.5 (216)	*4
Length/ Height	in (mm)	216 (5486)	
Base pipe diameter	in (mm)	2.88 (73)	*5
Base pipe mounting length	in (mm)	85.95 (2183)	
Radiating element material		prntd circuit bd	
Weight	lbs (kg)	90 (40.86)	
Mounting Hardware (Included)		Clamp130	
Mounting configurations		upright	
Actual shipping weight	lbs (kg)	96 (43.58)	
Shipping dimensions	in (mm)	219x14x17 (5563x356x432)	

#### Environmental Specifications



Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	9.81 (0.91)
Wind Loading Area (1/2" ice)	ft² (m²)	11.77 (1.09)
Rated wind velocity (no ice)	mph (km/h)	100 (161)
Rated wind velocity (1/2" radial ice)	mph (km/h)	85 (137)
Lateral Thrust (100 mph No Ice)	lbs (N)	438 (1948.2)
Torsional moment (100 mph No Ice)	ft-lbs (Nm)	188 (253.8)

#### Notes

- \*1 : Dependent on reflector setting 16/15.5/15/14 dBd
- \*2 : 90°/105°/130°/160°
- \*3 : 90° beamwidth configuration, clamp not included in measurement
- \*4 : 90° beamwidth configuration, clamp not included in measurement
- \*5 : Ref. clamp maximum

#### Ordering Information

When ordering, please refer to the model list on the previous page for specific model numbers and downtilt configurations.

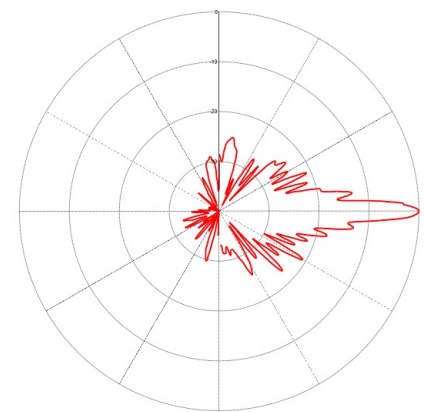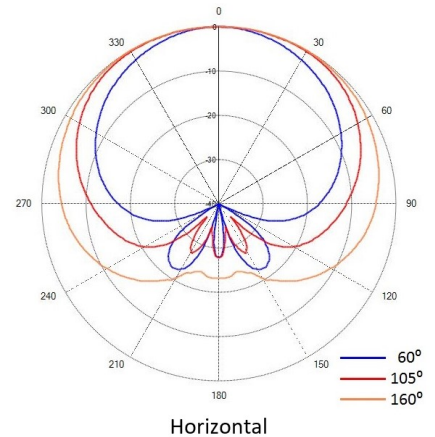

Region	United States	Europe, Middle East, and Africa	Canada, Caribbean, and Latin America	Asia-Pacific
Telephone	1 800 263 3275	+1 905 727 0165 ext 232	Canada: 1 905 726 7676 International: +1 905 726 7676	+1 905 727 0165 ext 287
E-mail	salesusa@sinctech.com	salesemea@sinctech.com	salescan@sinctech.com	salesasia@sinctech.com