


**Transmitter Combiners UHF and Tetra Transmitter Combiners** CTx450F-R-y Series

CT4450F-R-3 Cavity-ferrite combiner, 4 channel, High 'Q' 10" 1/4 wave cavities, 406 to 440 MHz

- · Broad band isolators covering the specified band
- Dual stage isolators and 10 inch high 'Q' 1/4 wave bandpass cavity for each channel
- · Works for inter-channel spacings as close as 100 KHz

The CTx-450F-R-y series combines the mechanical features of open-frame construction with UHF cavities to provide a high performance transmitter combiner for the 406-512 MHz frequency band. Typical insertion losses for 4 and 6 channels are illustrated below.

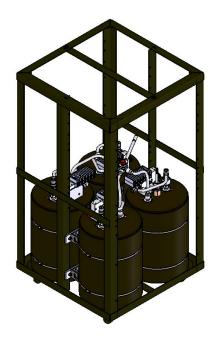

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		CT4450F-R-3	Issue: 3	Dated: 30-04-15

Sinclair's commitment to product leadership may result in improvement or change to this product

Copyright © Sinclair Technologies

Temperature range




## Transmitter Combiners UHF and Tetra Transmitter Combiners CTx450F-R-y Series

A Norsat Company Norsat

Frequency Range	MHz	406 to 440
Input VSWR (max)		1.25:1
Maximum Input Power (per channel)	W	150
Input Connectors		N-Female
Output Connectors		N-Female
Frequency separation (max)	MHz	12
Frequency separation (min)	MHz	0.1
Insertion loss (max) Tx to Ant	dB	4.4
Isolation Tx to Tx	dB	60
	·n	
Isolation antenna to Tx	dB	50
Isolation antenna to Tx Output VSWR	dВ	2:1
	dB	
Output VSWR Number of channels  Mechanical Specifications Depth	in (mm)	2:1 4 21 (533)
Output VSWR Number of channels  Mechanical Specifications		2:1 4
Output VSWR Number of channels  Mechanical Specifications Depth	in (mm)	2:1 4 21 (533)
Output VSWR Number of channels  Mechanical Specifications Depth Length/ Height	in (mm) in (mm)	2:1 4 21 (533) 38 (965)
Output VSWR Number of channels  Mechanical Specifications Depth Length/ Height Width	in (mm) in (mm) in (mm)	2:1 4 21 (533) 38 (965) 21 (533)
Output VSWR Number of channels  Mechanical Specifications Depth Length/ Height Width Weight	in (mm) in (mm) in (mm)	2:1 4 21 (533) 38 (965) 21 (533) 90 (40.86)

°F (°C)

Ordering Information
Specify frequency for the four Tx channels.



Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		CT4450F-R-3	Issue: 3	Dated: 30-04-15

-22 to +140 (-30 to +60)