


Transmitter Combiners UHF and Tetra Transmitter Combiners CTx453F Series

CT4453F Combiner, cavity-ferrite, open cabinet, 4 channels, 406-512 MHz

- Minimum Tx-Tx separation of 0.075 MHz
- · Low loss dual stage isolators
- · Equipment is mounted in a Sinclair Open Frame Rack which is included

The 'CTx453F' series of open frame rack cavity-ferrite transmitter combiners is available in 2 to 8 channel configurations. Each channel on these combiners includes a low-loss dual-stage isolator and Sinclair-developed High 'Q' 3/4 wave 10" bandpass cavity filter. All models include the Sinclair Open Frame Rack (quantity of racks depends on number of channels. 1-4 channels includes 1 rack, 5-8 channels includes 2 racks).

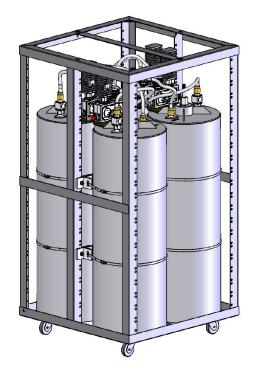


Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		CT4453F	Issue: 3	Dated: 12-11-15



Transmitter Combiners UHF and Tetra Transmitter Combiners CTx453F Series

A Norsat Company in Norsat

Electrical Specifications			
Frequency Range	MHz	406 to 512	
Input VSWR (max)		1.25:1	
Maximum Input Power (per channel)	W	125	
Input Connectors		N-Female	
Output Connectors		N-Female	
Frequency separation (min)	MHz	0.08	
Isolation Tx to Tx	dB	70	
Isolation antenna to Tx	dB	60	
Output VSWR		2:1	
Cavity electrical length		3/4	
Number of channels		4	
Mechanical Specifications Width	in (mm)	21 (533)	
Depth	in (mm) in (mm)	21 (533)	
	, ,	, ,	
Length/ Height	in (mm)	38 (965)	
Weight	lbs (kg)	103 (46.76)	
Shipping dimensions	in (mm)	22x22x43 (559x559x1092)	
Environmental Specifications			
Temperature range	°F (°C)	-22 to +140 (-30 to +60)	



Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet EPR 018855		CT4453F	Issue: 3	Dated: 12-11-15 Dated: 12-11-15