


Transmitter Combiners UHF and Tetra Transmitter Combiners CTx450F-R-y Series

CT5450F-R-5 Cavity-ferrite combiner, 5 channel, High 'Q' 10" 1/4 wave cavities, 459 to 512 MHz

- · Broad band isolators covering the specified band
- Dual stage isolators and 10 inch high 'Q' 1/4 wave bandpass cavity for each channel
- · Works for inter-channel spacings as close as 100 KHz

The CTx-450F-R-y series combines the mechanical features of open-frame construction with UHF cavities to provide a high performance transmitter combiner for the 406-512 MHz frequency band. Typical insertion losses for 4 and 6 channels are illustrated below.

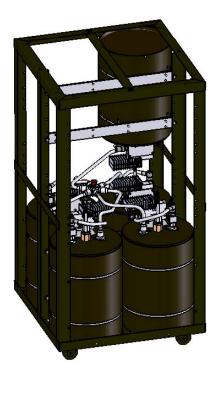

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		CT5450F-R-5	Issue: 3	Dated: 27-11-15

Dated: 27-04-15




Transmitter Combiners UHF and Tetra Transmitter Combiners CTx450F-R-y Series

A Norsat Company in Norsat

Frequency Range	MHz	459 to 512	
Input VSWR (max)		1.25:1	
Maximum Input Power (per channel)	W	150	
Input Connectors		N-Female	
Output Connectors		N-Female	
Frequency separation (max)	MHz	12	
Frequency separation (min)	MHz	0.1	
Insertion Loss (max) Tx to Ant	dB	4.6	
Isolation Tx to Tx	dB	60	
Isolation antenna to Tx	dB	50	
Output VSWR		2:1	
Number of channels		5	
	in (mm)	21 (533)	
Width	in (mm)	21 (533) 21 (533)	
Width Depth	in (mm)	21 (533)	
Width Depth Length/ Height		, ,	
Width Depth Length/ Height Finish	in (mm)	21 (533) 38 (965)	
Mechanical Specifications Width Depth Length/ Height Finish Weight Actual Shipping weight	in (mm) in (mm)	21 (533) 38 (965) chemical conversion	
Width Depth Length/ Height Finish Weight Actual Shipping weight	in (mm) in (mm) Ibs (kg) Ibs (kg)	21 (533) 38 (965) chemical conversion 105 (47.67)	
Width Depth Length/ Height Finish Weight	in (mm) in (mm) Ibs (kg)	21 (533) 38 (965) chemical conversion 105 (47.67) 110 (49.94)	
Width Depth Length/ Height Finish Weight Actual Shipping weight Shipping dimensions	in (mm) in (mm) Ibs (kg) Ibs (kg)	21 (533) 38 (965) chemical conversion 105 (47.67) 110 (49.94)	
Width Depth Length/ Height Finish Weight Actual Shipping weight	in (mm) in (mm) Ibs (kg) Ibs (kg)	21 (533) 38 (965) chemical conversion 105 (47.67) 110 (49.94)	

Ordering Information Specify frequency for the five Tx channels.



Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet EPR 018642		CT5450F-R-5	Issue: 3	Dated: 27-11-15 Dated: 27-04-15

Sinclair's commitment to product leadership may result in improvement or change to this product

Copyright © Sinclair Technologies