

CT6453F-R-3 Combiner, cavity-ferrite, 6 channel, open cabinet, 406-440 MHz

- 6 channel combiner featuring 3/4 wavelength 10" cavities
- Minimum Tx-Tx separation of 0.075 MHz
- Low loss broad band dual stage isolators
- Equipment is mounted in a Sinclair Open Frame Rack which is included

The 'CTx453F-R-y' series of open frame rack cavity-ferrite transmitter combiners is available in 2 to 8 channel configurations. Each channel on these combiners includes a broad band low-loss dual-stage isolator and Sinclair-developed High 'Q' bandpass cavity filter. All models include the Sinclair Open Frame Rack (quantity of racks depends on number of channels. 1-4 channels includes 1 rack, 5-8 channels includes 2 racks).


The model naming convention is described below:

x= Number of channels:

x=2	2 channels
x=3	3 channels
x=4	4 channels
x=5	5 channels
x=6	6 channels
x=7	7 channels
x=8	8 channels

y= Sub-Band:

y=3	406-440 MHz
y=4	430-470 MHz
y=5	459-512 MHz

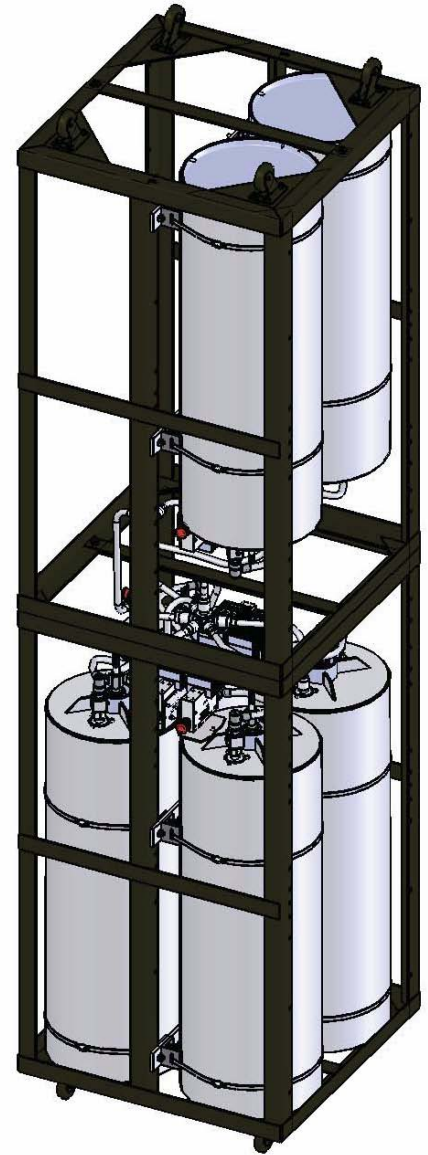

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	406 to 440
Input VSWR (max)		1.25:1
Maximum Input Power (per channel)	W	150
Input Connectors		N-Female
Output Connectors		N-Female
Frequency Separation (min)		0.075 MHz
Isolation Tx to Tx	dB	60
Isolation antenna to Tx	dB	50
Output VSWR		2:1
Cavity electrical length		3/4
Number of channels		6

Mechanical Specifications

Width	in (mm)	21 (533)	
Depth	in (mm)	21 (533)	
Length/ Height	in (mm)	76 (1930)	*1
Weight	lbs (kg)	168 (76.27)	

Environmental Specifications


Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------

Notes

*1 : when cabinets are stacked

Ordering Information

Specify one Tx frequency per channel

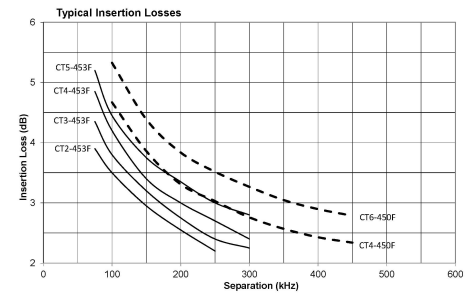

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com