

HH3140 Coupler, balanced, 3% B.W., N-Male/ N-Female, 300 Watts, 406-512 MHz

- T1 to T2 inputs N Male, Load and antenna termination N Female
- Max insertion loss of 3.3 dB per port
- 300 Watt power handling
- VSWR less than 1.25 for T1 to T2 ports

With Growing requirement for closely-spaced higher power systems, Sinclair has introduced several new hybrid couplers. These hybrids have been carefully designed to handle the power levels used for “upband” trunking and 900 MHz paging. A UHF version is also available for use in conjunction with our new CT-453 cavity-ferrite combiners, which allows channel spacing as close as 75 kHz on an 8-channel system. When installed on a panel with suitable Sinclair loads and harmonic filters, this series of ‘HP’ hybrid couplers is the basis of our higher power hybrid-ferrite combiners: a hybrid coupler panel is used to expand a 2-channel combiner up to 4 channels, 4 up to 6, etc.

All Sinclair hybrid couplers except HH-1140 are field tunable.



Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	406 to 512	*1
VSWR (max)		1.25:1	*2
Impedance	Ω	50	
Connectors		N-Male/N-Female	
Power Rating	W	300	
Insertion Loss (max) Tx to Ant	dB	3.3	*3
Isolation (min)	dB	45	

Notes

- *1 : Bandwidth at 3% of centre frequency
- *2 : T1 to T2 ports
- *3 : Per port
- *4 : Excluding connectors
- *5 : Excluding connectors
- *6 : Excluding connectors

Mechanical Specifications


Width	in (mm)	7 (178)	*4
Depth	in (mm)	1 (25)	*5
Length/ Height	in (mm)	1.2 (30)	*6
Weight	lbs (kg)	0.8 (0.36)	
Actual shipping weight	lbs (kg)	3 (1.36)	
Shipping dimensions	in (mm)	13x9x3 (330x229x76)	

Ordering Information

Specify two transmit frequencies when ordering.

Environmental Specifications

Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------

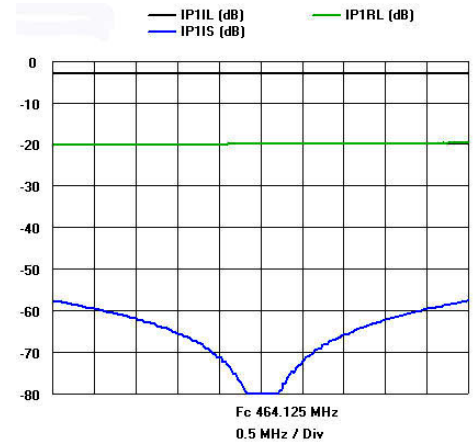

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com