

Duplexers Low Band, Aviation, and VHF Duplexers Q201G Series


## Q201GC-2

Duplexer, base station, Q-Circuit, cabinet mount, 148-174 MHz

Also referred as: Q201GC\*2

Six cavity configuration provides very high attention at extremely close frequency separation
Quasi-bandpass response results in suppression of spurious and sideband transmitter noise
Easy cabinet mount configuration

The Q201 series duplexers utilizes Sinclair's Q-circuit design in a 6-cavity configuration to provide very high attenuation at extremely close frequency separation in the 132-148 MHz band and 148-174 MHz band. This design provides a quasi-bandpass response, resulting in suppression of spurious and sideband transmitter noise between, and adjacent to, the duplex frequencies. The typical isolation attained between duplex frequencies is greater than 50 dB. The Q-201G is available in either cabinet, Q-201GC, or rack-mounted, Q-201GR, configuration.

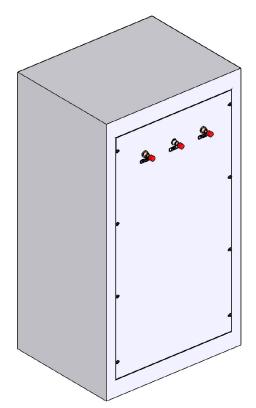

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet EPR 018863		Q201GC-2	Issue: 90	Dated: 04-05-15 Dated: 04-05-15
Customer Tech Manual 006624		Sinclair's commitment to product leadership may result in improvement or change to this product		




Electrical Specifications			
Frequency Range	MHz	148 to 174	
Input VSWR (max)		1.5:1	
Impedance	Ω	50	
Average Power Input (max)	W	350	
Connectors		N-Female	
Frequency separation (min)	MHz	0.3	
Insertion loss (max) Tx to Ant	dB	2.2	
Isolation (min)	dB	95	

## **Mechanical Specifications**

Depth	in (mm)	18 (457)
Length/ Height	in (mm)	40.4 (1026)
Width	in (mm)	22 (559)
Weight	lbs (kg)	214 (97.16)
Finish		Black
Shipping dimensions	in (mm)	22x22x43 (559x559x1092)
Mounting configurations		cabinet

## **Environmental Specifications**

Temperature range	°F (°C)	-40 to +140 (-40 to +60)	



Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet EPR 018863		Q201GC-2	Issue: 90	Dated: 04-05-15 Dated: 04-05-15
Customer Tech Manual 006624		Sinclair's commitment to product leadership may result in improvement or change to this product		

air's commitment to product leadership may result in improvement or change to this product Copyright © Sinclair Technologies