

SC251-HF4LDF(D00-G3) Collinear omni antenna, 2.4 dBd gain, low PIM, PIP rated, HD, 156-174 MHz

- Wideband 2.4 dBd gain collinear omni antenna
- 500W power handling with low PIM and high PIP rating
- Rugged fiberglass radome provides superior environmental protection
- 0, 2, 4, or 6 degrees of electrical downtilt available

A side mounting kit is Mandatory when offset mounting the antenna. The SMK-345-A7 for Offset Side Mount is available separately.

The SC251-HL is a 2.4dBd collinear omni featuring low passive intermod performance with single or dual port configuration option available. Fabricated using durable components, this series of antennas is designed for ease of installation. The foam wrapped brass construction provides a light and durable structure housed in a UV protected fiberglass radome ensuring superior resistance to harsh environmental conditions. This family is fabricated to meet the most stringent wind and ice loading requirements.

Due to its wide band and high average power and PIP power handling capability, this antenna is ideally suited for VHF trunking applications or multi-channel operations.

The reliability and durability of this antenna makes it suitable for mission critical applications such as public safety and law enforcement.



www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		SC251-HF4LDF(D00-G3)	Issue: 2	Dated: 14-12-16

Electrical Specifications

Frequency Range	MHz	156 to 174	
Bandwidth	MHz	18	
Connector		7/16 DIN-Female	
Gain (nominal)	dBd (dBi)	2.4 (4.5)	*1
Input VSWR (max)		1.5:1	
Polarization		vertical	
Impedance	Ω	50	
Pattern		Omni-directional	
Vertical beamwidth (typ)	degrees	34	
Average Power Input (max)	W	500	
Passive intermod. (2x20W, 3rd ord.)	dBc	-150	
Lightning protection		DC ground	
PIP(KW, max)		25	
Electrical tilt (available)		0, 2, 4, or 6 degrees	

Notes


*1 : Gain=2.15-2.65dBd

Mechanical Specifications

Width	in (mm)	5 (127)
Depth	in (mm)	5 (127)
Length/ Height	in (mm)	132 (3353)
Base pipe diameter	in (mm)	5 (127)
Base pipe mounting length	in (mm)	20 (508)
Radome material		fiberglass (UV protected)
Weight	lbs (kg)	56 (25.42)
Weight iced (1/2" ice)	lbs (kg)	90 (40.86)
Mounting Hardware (Optional)		Clamp006C
Actual shipping weight	lbs (kg)	85 (38.59)
Shipping dimensions	in (mm)	150x6x6 (3810x152x152)
Number of ports		1
Mounting configurations		Universal mount
Recommended For Offset Side Mount:		SMK-345-A7
Radome Colour		Light Blue

Ordering Information

Clamps must be ordered separately

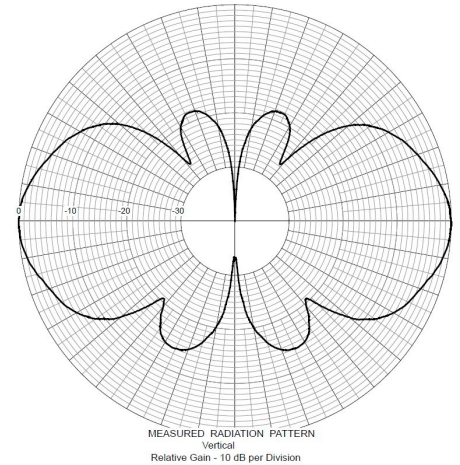

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	2.8 (0.26)
Wind Loading Area (1/2" ice)	ft² (m²)	3.4 (0.32)
Rated wind velocity (no ice)	mph (km/h)	210 (338)
Rated wind velocity (1/2" radial ice)	mph (km/h)	180 (290)
Lateral thrust (100 mph No Ice)	lbs (N)	110 (489.3)
Bending moment (100 mph No Ice)	ft-lbs (Nm)	407 (549.5)
Tip deflection (100 mph No Ice)	degrees	0.2

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		SC251-HF4LDF(D00-G3)	Issue: 2	Dated: 14-12-16