

SC432D-HF2LDF(D02-I40-G06) Collinear omni, 6 dBd (typ), 2 ports, 40 dB, 2° DT, HD, low PIM, 806-960 MHz

- Dual collinear antennas with typical 6 dBd gain and 2 degrees of downtilt
- 1.5:1 VSWR to provide excellent coverage
- Designed to operate in extreme environmental conditions.
- Provides 40 dB port-to-port isolation.

**Recommend using the SMK-335-A3 or SMK-335-A7 kits when side mounting.**

Sinclair's new line of high isolation dual port antennas, the SC432D's are collinear, omni-directional antennas are available with various gains (0, 3, and 6 dBd), and are also available with different port-to-port isolations, depending on the gains. These dual antennas are all enclosed in the same radome, requiring less tower space than two individual ones.



www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

#### Electrical Specifications

Frequency Range	MHz	806 to 960
Connector		7/16 DIN-Female
Gain (nominal)	dBd (dBi)	6 (8.1)
Input VSWR (max)		1.5:1
Polarization		vertical
Impedance	Ω	50
Pattern		Omni-directional
Vertical beamwidth (typ)	degrees	12.5
Average Power Input (max)	W	500
Isolation between sections (nom)	dB	40
Passive intermod. (2x20W, 3rd ord.)	dBc	-150
Lightning protection		DC ground
Electrical tilt (available)		0-10 degrees in 1° increments

#### Mechanical Specifications

Width	in (mm)	3.5 (89)
Depth	in (mm)	3.5 (89)
Length/ Height	in (mm)	163 (4140)
Height	in (mm)	160.5 (4077)
Base pipe diameter	in (mm)	3.5 (89)
Base pipe mounting length	in (mm)	24 (610)
Radome material		fiberglass (UV protected)
Weight	lbs (kg)	35 (15.89)
Weight iced (1/2" ice)	lbs (kg)	64 (29.06) *1
Mounting Hardware (Optional)		Clamp006B *2
Actual shipping weight	lbs (kg)	75 (34.05)
Shipping dimensions	in (mm)	186x6x6 (4724x152x152)
Number of ports		2
Mounting configurations		upright
Recommended For Offset Side Mount:		SMK-335-A3 or SMK-335-A7

#### Environmental Specifications


Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	2.42 (0.22)
Wind Loading Area (1/2" ice)	ft² (m²)	3.22 (0.3) *3
Rated wind velocity (no ice)	mph (km/h)	180 (290)
Rated wind velocity (1/2" radial ice)	mph (km/h)	160 (258)
Lateral thrust (100 mph No Ice)	lbs (N)	95 (422.6) *4
Bending moment (100 mph No Ice)	ft-lbs (Nm)	517 (698) *5
Tip deflection (100 mph No Ice)	degrees	1.5 *6

#### Notes

- \*1 : 0.5" of ice.
- \*2 : Qty 2
- \*3 : 0.5" of ice.
- \*4 : Value based on 100 mph with 0" ice.
- \*5 : Value based on 100 mph with 0" ice.
- \*6 : Value based on 100 mph with 0" ice.

#### Ordering Information

Clamps must be ordered separately. Recommend the SMK-335-A3 or SMK-335-A7 kits when side mounting.

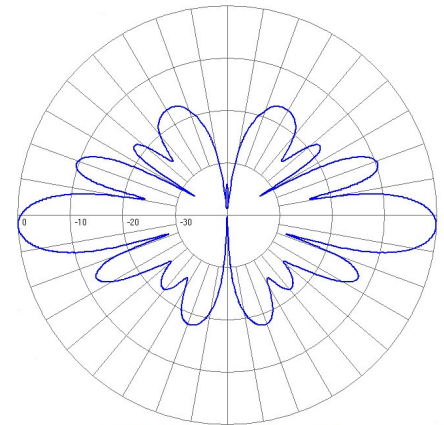

Vertical, 2° downtilt shown

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com