

SD210-HF2P2SNM(B-LSABK) 1 dipole, 2 dBd, bi-directional, lightning spike, ABK, HD, 138-174 MHz

- Covers the entire 138-174 MHz frequency range
- 2.0 dBd gain with bi-directional pattern
- Heavy duty, top mount and black anodized
- 24' lightning spike included

The SD210-H series of antennas is unique in its high efficiency and exceptionally wide bandwidth, covering the frequency ranges of 118-138, 138-174, and 190-225 MHz with a VSWR of 1.5:1 or better. Because of its bandwidth, the SD210 series is perfectly suited for multicoupled systems.

Two model variants of this rugged antenna are available (Offset which offers 2.5 dBd of gain, and bi-directional with 2.0 dBd of gain).



www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	138 to 174
Connector		N-Male *1
Gain (nominal)	dBd (dBi)	2 (4.1)
VSWR (max)		1.5:1
Polarization		vertical
Impedance	Ω	50
Pattern		Bi-directional
Vertical beamwidth (typ)	degrees	68
Average Power Input (max)	W	200
Lightning protection		DC ground
Main Beam Electrical Tilt (Downtilt)	degrees	Not available

Notes


- *1 : N-Female available
- *2 : Qty 2

Mechanical Specifications

Width	in (mm)	39.5 (1003)
Depth	in (mm)	4.75 (121)
Length/ Height	in (mm)	84 (2134)
Base pipe diameter	in (mm)	2.88 (73)
Base pipe mounting length	in (mm)	24 (610)
Radiating element material		aluminum
Finish		anodize (black)
Weight	lbs (kg)	21 (9.53)
Weight iced (1/2" ice)	lbs (kg)	45 (20.43)
Mounting Hardware (Optional)		Clamp147 or Clamp015 *2
Estimated Shipping Weight	lbs (kg)	27.6 (12.53)
Shipping dimensions	in (mm)	66x42x0.5 (1676x1067x13)
Mounting configurations		top mount

Ordering Information

Clamps must be ordered separately.

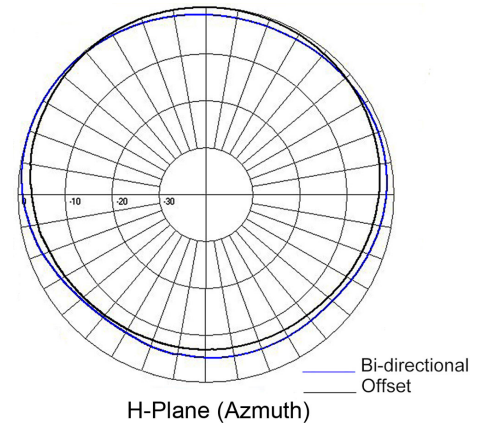

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	1.44 (0.13)
Wind Loading Area (1/2" ice)	ft² (m²)	2.36 (0.22)
Rated wind velocity (no ice)	mph (km/h)	215 (346)
Rated wind velocity (1/2" radial ice)	mph (km/h)	165 (266)
Lateral thrust (100 mph No Ice)	lbs (N)	53 (235.7)
Torsional moment (100 mph No Ice)	ft-lbs (Nm)	52 (70.2)
Bending moment (100 mph No Ice)	ft-lbs (Nm)	109 (147.2)
Tip deflection (100 mph No Ice)	degrees	0.02

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com